


PHASING DIAGRAM

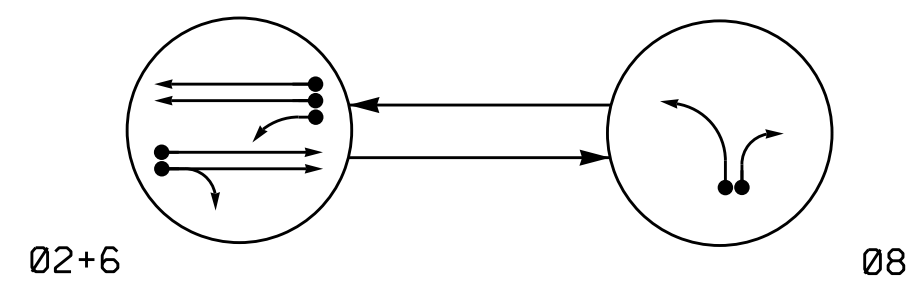


PHASING DIAGRAM DETECTION LEGEND

- ←●→ DETECTED MOVEMENT
- ←→ UNDETECTED MOVEMENT (OVERLAP)
- UNSIGNALIZED MOVEMENT
- ←--- PEDESTRIAN MOVEMENT

SIGNAL FACE	PHASE		
	Ø2+6	Ø8	Ø8
21, 22	G	R	Y
61, 62	G	R	Y
81, 82	R	G	R

SIGNAL FACE I.D.

All Heads L.E.D.




21, 22  
61, 62  
81, 82

OASIS 2070 LOOP & DETECTOR INSTALLATION CHART												
LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	DETECTOR PROGRAMMING						SYSTEM LOOP	NEW CARD
					PHASE	CALLING	EXTENSION	FULL TIME DELAY	STRETCH TIME	DELAY TIME		
2A	6X6	300	4	-	2	Y	Y	-	-	-	-	Y
2B	6X6	300	4	-	2	Y	Y	-	-	-	-	Y
6A	6X6	300	4	-	6	Y	Y	-	-	-	-	Y
6B	6X6	300	4	-	6	Y	Y	-	-	-	-	Y
6C	6X40	+5	2-4-2	-	6	Y	Y	Y	-	3	-	Y
8A	6X40	0	2-4-2	-	8	Y	Y	-	-	3	-	Y
8B	6X40	0	2-4-2	-	8	Y	Y	-	-	15	-	Y

2 Phase Fully Actuated Asheville Signal System

NOTES

- Refer to "Roadway Standard Drawings NCDOT" dated January 2012 and "Standard Specifications for Roads and Structures" dated January 2012.
- Do not program signal for late night flashing operation unless otherwise directed by the Engineer.
- Abandon existing loops as shown.
- Set all detector units to presence mode.
- Locate new cabinet so as not to obstruct sight distance of vehicles turning right on red.
- Pavement markings are existing.
- Maximum times shown in timing chart are for free-run operation only. Coordinated signal system timing values supersede these values.

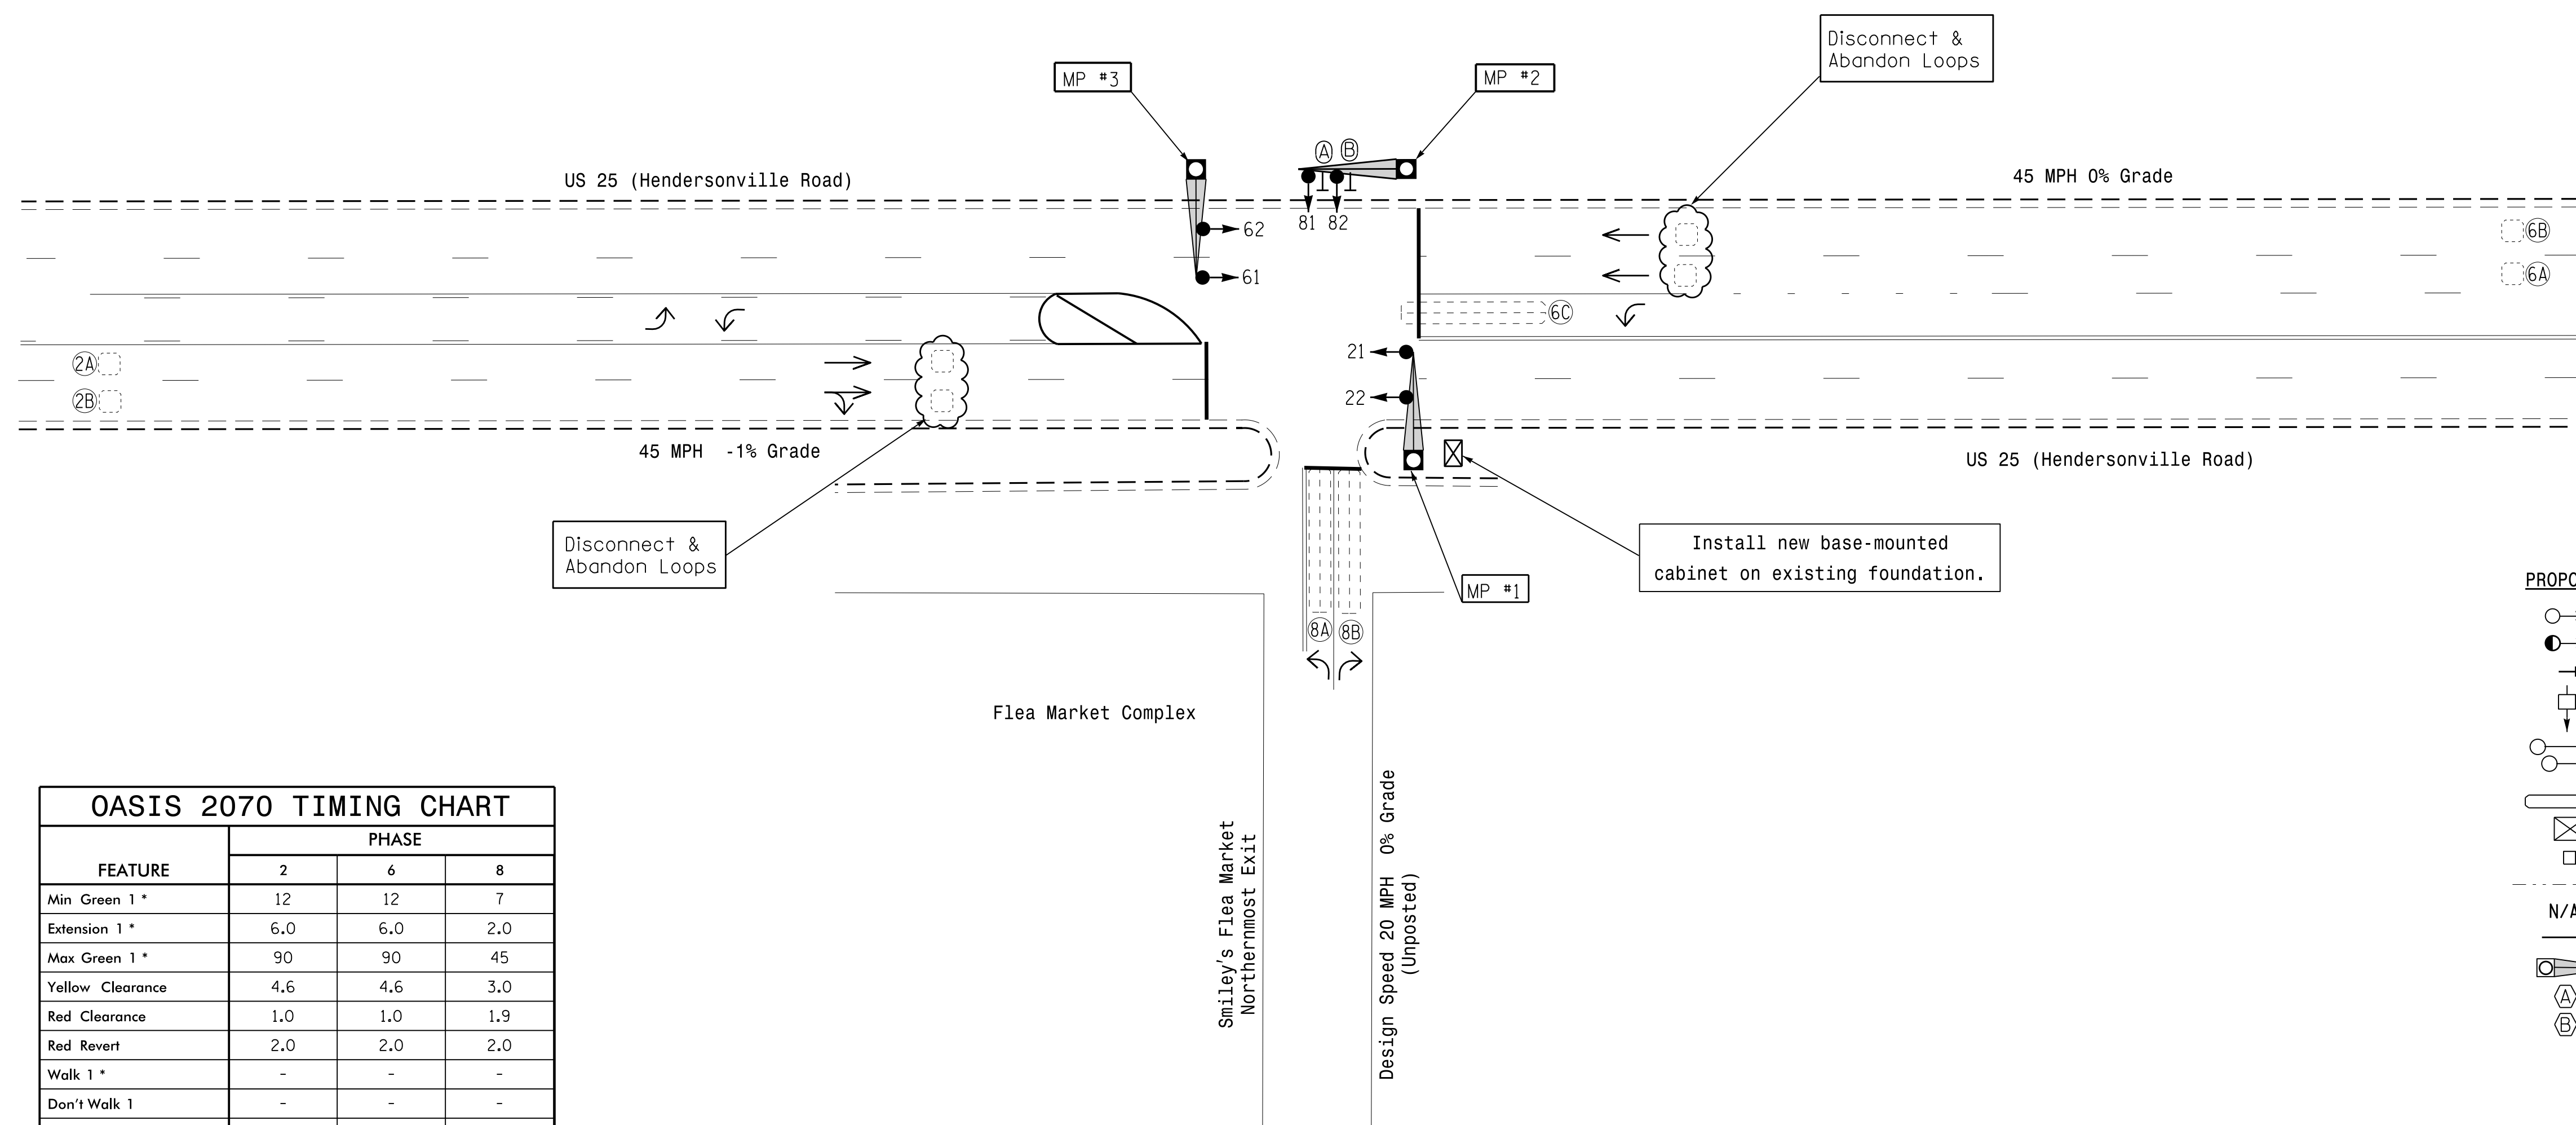

OASIS 2070 TIMING CHART			
FEATURE	PHASE		
	2	6	8
Min Green 1 *	12	12	7
Extension 1 *	6.0	6.0	2.0
Max Green 1 *	90	90	45
Yellow Clearance	4.6	4.6	3.0
Red Clearance	1.0	1.0	1.9
Red Revert	2.0	2.0	2.0
Walk 1 *	-	-	-
Don't Walk 1	-	-	-
Seconds Per Actuation *	1.5	1.5	-
Max Variable Initial *	34	34	-
Time Before Reduction *	15	15	-
Time To Reduce *	30	30	-
Minimum Gap	3.0	30	-
Recall Mode	MIN RECALL	MIN RECALL	-
Vehicle Call Memory	YELLOW	YELLOW	-
Dual Entry	-	-	-
Simultaneous Gap	ON	ON	ON

\* These values may be field adjusted. Do not adjust Min Green and Extension times for phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.

PROPOSED	LEGEND	EXISTING
	Traffic Signal Head	
	Modified Signal Head	N/A
	Sign	
	Pedestrian Signal Head With Push Button & Sign	
	Signal Pole with Guy	
	Signal Pole with Sidewalk Guy	
	Inductive Loop Detector	
	Controller & Cabinet	
	Junction Box	
	2-in Underground Conduit	
N/A	Right of Way	
	Directional Arrow	
	Metal Pole with Mastarm	
	Left Arrow "ONLY" Sign (R3-5L)	
	Right Arrow "ONLY" Sign (R3-5R)	

Signal Upgrade

**US 25 (Hendersonville Road) at Smiley's Flea Market's Northernmost Exit**

Division 14 Henderson County Fletcher

PLAN DATE: April 2016 REVIEWED BY: T. Williams

PREPARED BY: M. Mahbooba REVIEWED BY:

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SEAL

DATE: 8/9/2016

SIG. INVENTORY NO. 14-1145

09-AUG-2016 15:10 S:\T\SAS\15 Signal Design\Signal Design\116 Signal System\Signal Design\14-1145\41145\_sig\_dsn\_2016mdd.dgn  
 mmbhoooba