

### MAXTIME OVERLAP PROGRAMMING DETAIL FOR DEFAULT PHASING

Front Panel  
Main Menu >Controller >Overlap >Overlap Parameters/Overlap Timings

Web Interface  
Home >Controller >Overlap Configuration >Overlaps

#### Overlap Plan 1

Overlap	1	2	5	7
Type	FYA 4 - Section	FYA 4 - Section	FYA 4 - Section	Normal
Included Phases	6	6	6	3
Modifier Phases	-	3	-	-
Modifier Overlaps	7	-	-	-
Trail Green	0	0	0	0
Trail Yellow	0.0	0.0	0.0	0.0
Trail Red	0.0	0.0	0.0	0.0

### OUTPUT CHANNEL CONFIGURATION

Front Panel  
Main Menu >Controller >More>Channels>Channels Config

Web Interface  
Home >Controller >Advanced IO>Channels>Channels Configuration

#### Channel Configuration

Channel	Control Type	Control Source	Flash Yellow	Flash Red	Flash Alt	MMU Channel
1	Overlap	7	X	-	X	1
2	Phase Vehicle	2	X	-	-	2
3	Phase Vehicle	3	X	-	X	3
4	Phase Vehicle	4	-	X	-	4
5	Phase Vehicle	5	-	X	-	5
6	Phase Vehicle	6	X	-	X	6
7	Phase Vehicle	7	-	X	-	7
8	Phase Vehicle	8	-	X	-	8
9	Overlap	1	X	-	-	9
10	Overlap	2	X	-	-	10
11	Overlap	3	X	-	-	11
12	Overlap	4	-	X	-	12
13	Phase Ped	2	-	-	-	13
14	Phase Ped	4	-	-	-	14
15	Phase Ped	6	-	-	-	15
16	Phase Ped	8	-	-	-	16
17	Overlap	5	X	-	X	17
18	Overlap	6	-	X	-	18

NOTICE OVERLAP 7  
ASSIGNED TO  
CHANNEL 1.

NOTICE CHANNEL 1  
YELLOW FLASH  
NOTICE CHANNEL 3  
YELLOW FLASH

NOTICE CHANNEL 10  
YELLOW FLASH

NOTICE CHANNEL 17  
YELLOW FLASH

### MAXTIME ALTERNATE PHASING ACTIVATION DETAIL

To run alternate phasing, select a Pattern that is programmed to run Overlap Plan 2 and Detector Plan 2. A Pattern can be selected through the scheduler or manually by changing the Operational Mode.

PHASING	OVERLAP PLAN	VEH DET PLAN
ACTIVE PLAN REQUIRED TO RUN DEFAULT PHASING	1	1
ACTIVE PLAN REQUIRED TO RUN ALTERNATE PHASING	2	2

#### ALTERNATE PHASING CHANGE SUMMARY

THE FOLLOWING IS A SUMMARY OF WHAT TAKES PLACE WHEN OVERLAP PLAN 2 AND VEHICLE DETECTOR PLAN 2 ACTIVATE TO CALL THE "ALTERNATE PHASING":

OVERLAP PLAN 2: Modifies overlap included phases for heads 31 and 32 to run protected turns only.

VEH DET PLAN 2: Reduces delay time for phase 3 call on loop 3A to 0 seconds.

### MAXTIME OVERLAP PROGRAMMING DETAIL FOR ALTERNATE PHASING

Front Panel  
Main Menu >Controller >Overlap >Overlap Parameters/Overlap Timings

Web Interface  
Home >Controller >Overlap Configuration >Overlaps

In the table view of the web interface, right click on "Overlap" in the top left corner of the table. Copy the entire contents of Overlap Plan 1. Paste Overlap Plan 1 into Overlap Plan 2. Modify Overlap Plan 2 as shown below and save changes.

#### Overlap Plan 2

Overlap	1	2	5	7
Type	FYA 4 - Section	FYA 4 - Section	FYA 4 - Section	Normal
Included Phases	-	-	6	3
Modifier Phases	-	3	-	-
Modifier Overlaps	7	-	-	-
Trail Green	0	0	0	0
Trail Yellow	0.0	0.0	0.0	0.0
Trail Red	0.0	0.0	0.0	0.0

NOTICE INCLUDED PHASE

### MAXTIME DETECTOR PROGRAMMING DETAIL FOR ALTERNATE PHASING LOOP 3A

Front Panel  
Main Menu >Controller >Detector >Veh Det Plans

Web Interface  
Home >Controller >Detector Configuration >Vehicle Detectors

In the table view of web interface right click on "Detector" in the top left corner of the table. Copy the entire contents of Detector Plan 1. Paste Detector Plan 1 into Detector Plan 2. Modify Detector Plan 2 as shown below and save changes.

#### Plan 2

Detector	Call Phase	Delay
3A	7	3
		0

### FLASHER CIRCUIT MODIFICATION DETAIL

IN ORDER TO INSURE THAT SIGNALS FLASH CONCURRENTLY ON THE SAME APPROACH, MAKE THE FOLLOWING FLASHER CIRCUIT CHANGES:

- ON REAR OF PDA - REMOVE WIRE FROM TERM. T2-4 AND TERMINATE ON T2-2.
- ON REAR OF PDA - REMOVE WIRE FROM TERM. T2-5 AND TERMINATE ON T2-3.
- REMOVE FLASHER UNIT 2.

THE CHANGES LISTED ABOVE TIES ALL PHASES AND OVERLAPS TO FLASHER UNIT 1.

### MAXTIME ALTERNATE PHASING PATTERN PROGRAMMING DETAIL

Front Panel  
Main Menu >Controller >Coordination >Patterns

Web Interface  
Home >Controller >Coordination >Patterns


#### Pattern Parameters

Pattern	Veh Det Plan	Overlap Plan
*	2	2

\* The Pattern number(s) are to be determined by the Division and/or City Traffic Engineer.

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 09-0985  
DESIGNED: February 2024  
SEALED: February 12, 2024  
REVISED:

Signal Upgrade - Final Design - Electrical Detail - Sheet 2 of 2

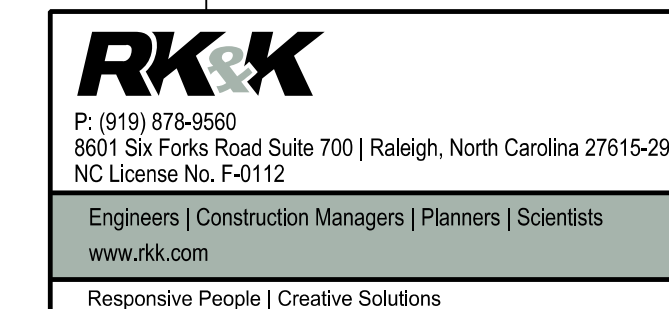

Electrical and Programming Details For:	US 158 WB (Reidsville Rd.) at SR 1965 (Belews Creek Rd.)	DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED
Prepared for the Offices of:	Division 9 Forsyth County Walkertown	SEAL NORTH CAROLINA PROFESSIONAL ENGINEER PORTER JONES
	PLAN DATE: February 2024 REVIEWED BY: DT Sears	DocuSigned by Porter Jones 2/12/2024
	PREPARED BY: WP Erickson-Jones REVIEWED BY:	SIG. INVENTORY NO. 09-0985
	REVISIONS	
	INIT. DATE	