

## ECONOLITE ASC/3-2070 PED 3 PROGRAMMING ASSIGNMENT DETAIL

(program controller as shown)

1. From Main Menu select 6. DETECTORS
2. From DETECTOR Submenu select 3. PED DETECTOR INPUT ASSIGNMENT

PED DET PHASE ASSIGNMENT MODE: NTCIP								
PHASE	1	2	3	4	5	6	7	8
DETECTOR	0	2	8	4	0	6	0	0
PHASE	9	10	11	12	13	14	15	16
DETECTOR	0	0	0	0	0	0	0	0

← NOTICE PED DETECTOR 8  
ASSIGNED TO PHASE 3

1. From Main Menu select 1. CONFIGURATION
2. From CONFIGURATION Submenu select 3. LOAD SW ASSIGN

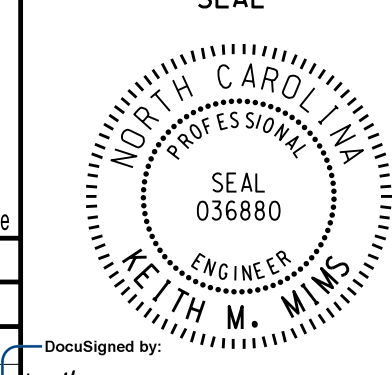

LD SWITCH ASSIGN									
PHASE	DIMMING	---FLASH---							
/OVLP	TYPE	R	Y	G	D	PWR	AUT	TGR	
1	1	V	.	.	.	+	A	R	X
2	2	V	.	.	.	+	A	Y	.
3	3	V	.	.	.	+	A	R	X
4	4	V	.	.	.	+	A	R	.
5	5	V	.	.	.	-	A	R	.
6	6	V	.	.	.	-	A	Y	X
7	7	V	.	.	.	-	A	R	.
8	8	V	.	.	.	-	A	R	X
9	1	O	.	.	.	+	A	R	X
10	2	O	.	.	.	+	A	R	X
11	3	O	.	.	.	-	A	R	.
12	4	O	.	.	.	-	A	R	.
13	2	P	.	.	.	+	A	.	.
14	4	P	.	.	.	-	A	.	.
15	6	P	.	.	.	+	A	.	.
16	3	P	.	.	.	-	A	.	.

NOTICE PHASE 3 PED  
ASSIGNED TO LD SWITCH 16 →

### COUNTDOWN PEDESTRIAN SIGNAL OPERATION

Countdown Ped Signals are required to display timing only during Ped Clearance Interval. Consult Ped Signal Module user's manual for instructions on selecting this feature.

THIS ELECTRICAL DETAIL IS FOR  
THE SIGNAL DESIGN: 06-0010  
DESIGNED: June 2016  
SEALED: 9/7/2016  
REVISED: N/A

Electrical Detail - Sheet 3 of 3		DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED
ELECTRICAL AND PROGRAMMING DETAILS FOR:	<b>SR 3828 (Robeson Street)</b> at <b>SR 2299 (Russell Street)</b>	SEAL 
Prepared In the Offices of:  750 N. Greenfield Pkwy, Garner, NC 27529	Division 6 Cumberland County Fayetteville PLAN DATE: September 2016 REVIEWED BY: BAS PREPARED BY: S. Armstrong REVIEWED BY:	REVISIONS: _____ INIT. DATE _____ _____ _____ _____
		DocuSigned by: Keith M. Mims 10/4/2016 DATE SIG. INVENTORY NO. 06-0010

04-0010-2016-06-11  
S:\IT\2016\10\Sig\ped\asc\3-2070\asc\3-2070\_06-0010.dgn  
sarmstrong