
## PHASING DIAGRAM

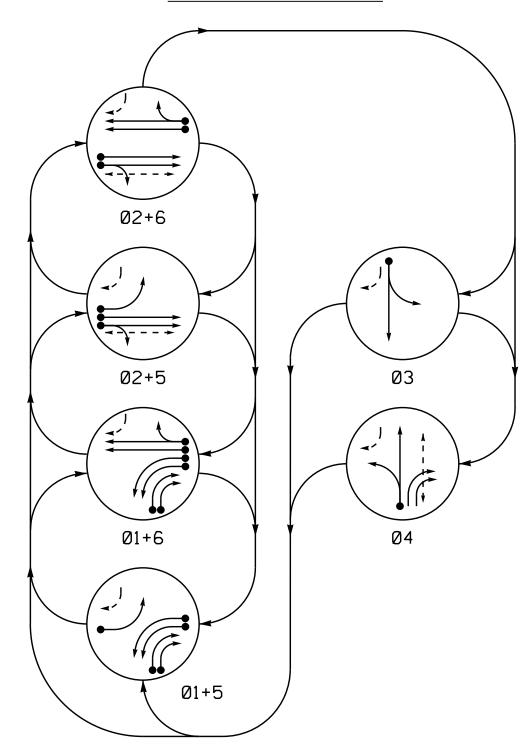

PHASING DIAGRAM DETECTION LEGEND

UNSIGNALIZED MOVEMENT

UNDETECTED MOVEMENT (OVERLAP)

DETECTED MOVEMENT

← − − > PEDESTRIAN MOVEMENT

TABLE OF OPERATION							
	PHASE						
SIGNAL FACE	Ø1+5	Ø 1 + 6	Ø <b>2+5</b>	Ø2+6	<b>Ø</b> 3	Ø 4	FLASI
11, 12	<b>—</b>	<b>—</b>	#	₩	#	#	<del></del>
21, 22	R	R	G	G	R	R	Υ
31	R	R	R	R	G	R	R
32	R	R	R	R	G	R	R
41	R	R	R	R	R	G	R
42	R	R	R	R	R	G	R
43, 44	<b>→</b>		R	R	R	FY	R
51	<b>←</b>	<del></del>	<b>←</b>	<del></del>	₩	<del>√</del> R	<del></del>
61, 62	R	G	R	G	R	R	Υ
P21, P22	DW	DW	W	W	DW	DW	DRK
P41, P42	DW	DW	DW	DW	DW	W	DRK

## SIGNAL FACE I.D. All Heads L.E.D. R (Y) 12" 12" 21, 22 32 42 61, 62 11, 12 51 43, 44

P21, P22 P41, P42

OASIS 2070 LOOP & DETECTOR INSTALLATION CHART												
INDUCTIVE LOOPS					DETECTOR PROGRAMMING							
LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	PHASE	CALLING	EXTENSION	FULL TIME DELAY	STRETCH TIME	DELAY TIME	SYSTEM LOOP	NEW CARD
1 A	6X60	0	2-4-2	-	1	Υ	Υ	-	-	3	-	Υ
1B	6X60	0	2-4-2	-	1	Υ	Υ	-	-	1	-	Υ
1C	6X60	0	2-4-2	-	1	Υ	Υ	-	-	10	-	Υ
1D	6X60	0	2-4-2	-	1	Υ	Υ	-	-	15	-	Υ
2A	6X6	70	EXIST	-	2	Υ	Υ	-	-	-	-	Υ
2B	6X6	70	EXIST	-	2	Υ	Υ	-	-	-	-	Υ
3A	6X60	+5	2-4-2	-	3	Υ	Υ	-	_	3	_	Υ
4A	6X60	0	2-4-2	_	4	Υ	Υ	_	-	3	_	Υ
5A	6X60	0	2-4-2	-	5	Υ	Υ	-	_	3	-	Υ
6A	6X6	70	EXIST	-	6	Υ	Υ	-	_	-	-	Υ
6B	6X6	70	EXIST		6	Υ	Υ		_	_	_	Υ

Install new base-mounted

cabinet on existing foundation.

	25 MPH Design Sted  18 Grade Posted  18 Grade Speed  19 Grade Speed  19 Grade Speed  10 Grade Speed  10 Grade Speed	Biltmore Estate Drive	
US 25 (All Souls Crescent)	A 42 43	P41 3	35 MPH -3%
- 5A(	62 61 12	_51	(B) (B) (B) (C) (B) (C) (C) (B) (C) (C) (C) (C) (C) (C) (C) (C) (C) (C
35 MPH 0% Grade	32′ 31	21	US 25 (McDow

	OASIS	2070	TIMING	G CHART	Γ			
	PHASE							
FEATURE	1	2	3	4	5	6		
Min Green 1 *	7	10	7	7	7	10		
Extension 1	1.0	3.0	1.0	1.0	1.0	3.0		
Max Green 1 *	15	45	25	25	15	45		
Yellow Clearance	3.0	4.1	3.2	3.8	3.0	4.1		
Red Clearance	3.2	1.9	2.5	2.1	3.1	1.9		
Red Revert	2.0	2.0	2.0	2.0	2.0	2.0		
Walk 1 *	=	7	-	7	-	-		
Don't Walk 1	=	20	-	24	-	-		
Seconds Per Actuation *	-	-	-	-	-	-		
Max Variable Initial*	-	-	-	-	-	-		
Time Before Reduction *	-	-	-	-	-	-		
Time To Reduce *	-	-	-	-	-	-		
Minimum Gap	-	-	-	-	-	-		
Recall Mode	-	MIN RECALL	-	-	-	MIN RECALL		
Vehicle Call Memory	-	YELLOW	-	-	-	YELLOW		
Dual Entry	-	-	-	-	-	-		
Simultaneous Gap	ON	ON	ON	ON	ON	ON		

<sup>\*</sup> These values may be field adjusted. Do not adjust Min Green and Extension times for phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.

## 6 Phase Fully Actuated Asheville Signal System

## **NOTES**

- 1. Refer to "Roadway Standard Drawings NCDOT" dated January 2012 and "Standard Specifications for Roads and Structures" dated January 2012.
- 2. Do not program signal for late night flashing operation unless otherwise directed by the Engineer.
- 3. Phase 1 and/or phase 5 may be lagged.
- 4. The order of phase 3 and phase 4 may be reversed.
- 5. Reposition existing signal head number 41.
- 6. Set all detector units to presence 7. In the event of loop replacement,
- refer to the current ITS and Signals Design Manual and submit a Plan of Record to the Signal Design Section.
- 8. Locate new cabinet so as not to obstruct sight distance of vehicles turning right on red.
- 9. Omit "WALK" and flashing "DON'T WALK" with no pedestrian calls.
- 10. Program pedestrian heads to countdown the flashing "Don't Walk" time only.
- 11. Pavement markings are existing.
- 12. Maximum times shown in timing chart are for free-run operation only. Coordinated signal system timing values supersede these values.

	LEGEND	
<u>PROPOSED</u>		<b>EXISTING</b>
$\bigcirc$	Traffic Signal Head	<b></b>
<b>O</b>	Modified Signal Head	N/A
$\dashv$	Sign	$\dashv$
$\downarrow$	Pedestrian Signal Head With Push Button & Sign	•
<u> </u>	Signal Pole with Guy	•
S	ignal Pole with Sidewalk Guy	
	Inductive Loop Detector	$\subset = = = = = = = = = = = = = = = = = = =$
	Controller & Cabinet	K K M
	Junction Box	
	2-in Underground Conduit	
N/A	Right of Way	
$\longrightarrow$	Directional Arrow	$\longrightarrow$
$\langle \overline{\mathbb{A}} \rangle$	"YIELD" Sign (R1-2)	A

Signal Upgrade

US 25 (McDowell St./ All Souls Crescent) at US 25A (Lodge St.)/ Biltmore Estate Drive ivision 13 Buncombe County May 2016 REVIEWED BY: P.L. Alexander

INIT. DATE

SIG. INVENTORY NO.

'50 N.Greenfield Pkwy.Garner.NC 27529 PREPARED BY: R.N. Zinser REVIEWED BY: REVISIONS

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL

SIGNATURES COMPLETED