



PHASING DIAGRAMS

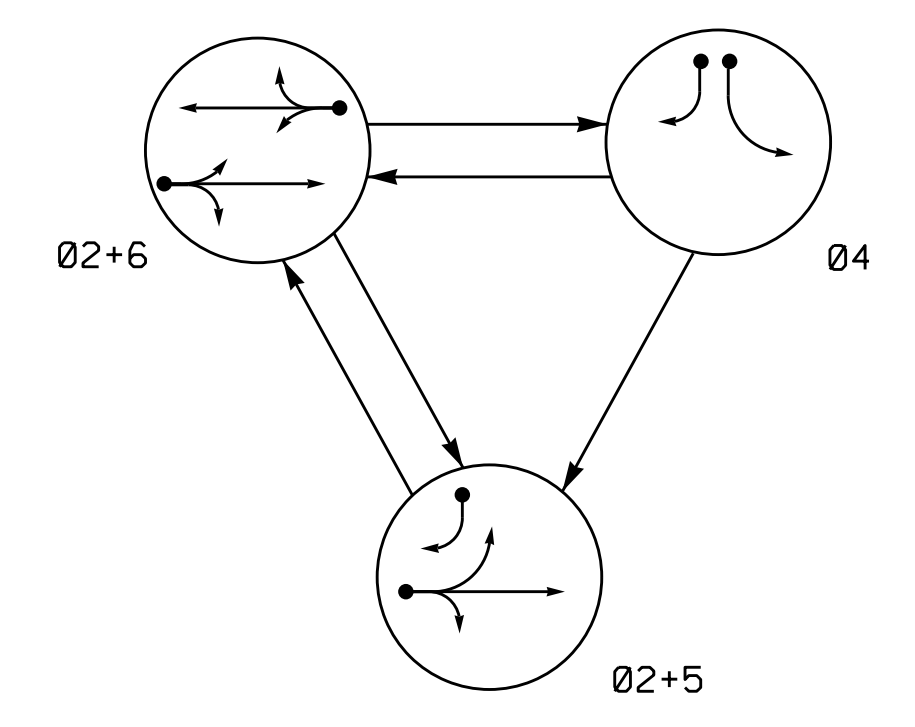

SIGNAL FACE	PHASE				
	02+5	02+6	04	L	R
21	G	G	R	Y	
22	G	G	R	Y	
41	R	R	G	R	
42	R	R	G	R	
61,62	R	G	R	Y	

SIGNAL FACE I.D.


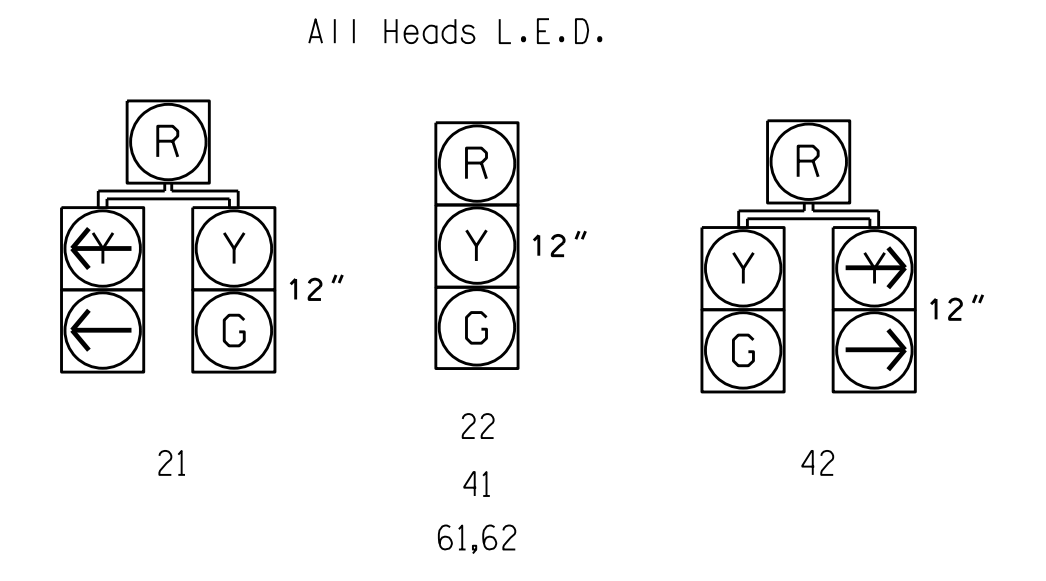


INDUCTIVE LOOPS				DETECTOR PROGRAMMING								
LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	PHASE	CALLING	EXTENSION	FULL TIME DELAY	STRETCH TIME	DELAY TIME	SYSTEM LOOP	NEW CARD
2A	6X6	70	4	-	2	Y	Y	-	-	-	-	Y
4A	6X60	0	2-4-2	-	4	Y	Y	-	-	3	-	Y
5A	6X40	0	2-4-2	-	5	Y	Y	Y	-	15	-	Y
5B	6X60	0	2-4-2	-	5	Y	Y	-	-	15	-	Y
6A	6X6	70	4	-	6	Y	Y	-	-	10	-	Y

3 Phase Fully Actuated Asheville Signal System

NOTES


1. Refer to "Roadway Standard Drawings NCDOT" dated January 2012 and "Standard Specifications for Roads and Structures" dated January 2012.
2. Do not program signal for late night flashing operation unless otherwise directed by the Engineer.
3. Enable Backup Protect for phase 2 to allow the controller to clear from phase 2+6 to phase 2+5 by progressing through an all red display.
4. Set all detector units to presence mode.
5. In the event of loop replacement, refer to the current ITS and Signals Design Manual and submit a Plan of Record to the Signal Design Section.
6. Locate new cabinet so as not to obstruct sight distance of vehicles turning right on red.
7. Pavement markings are existing.
8. Maximum times shown in timing chart are for free-run operation only. Coordinated signal system timing values supersede these values.

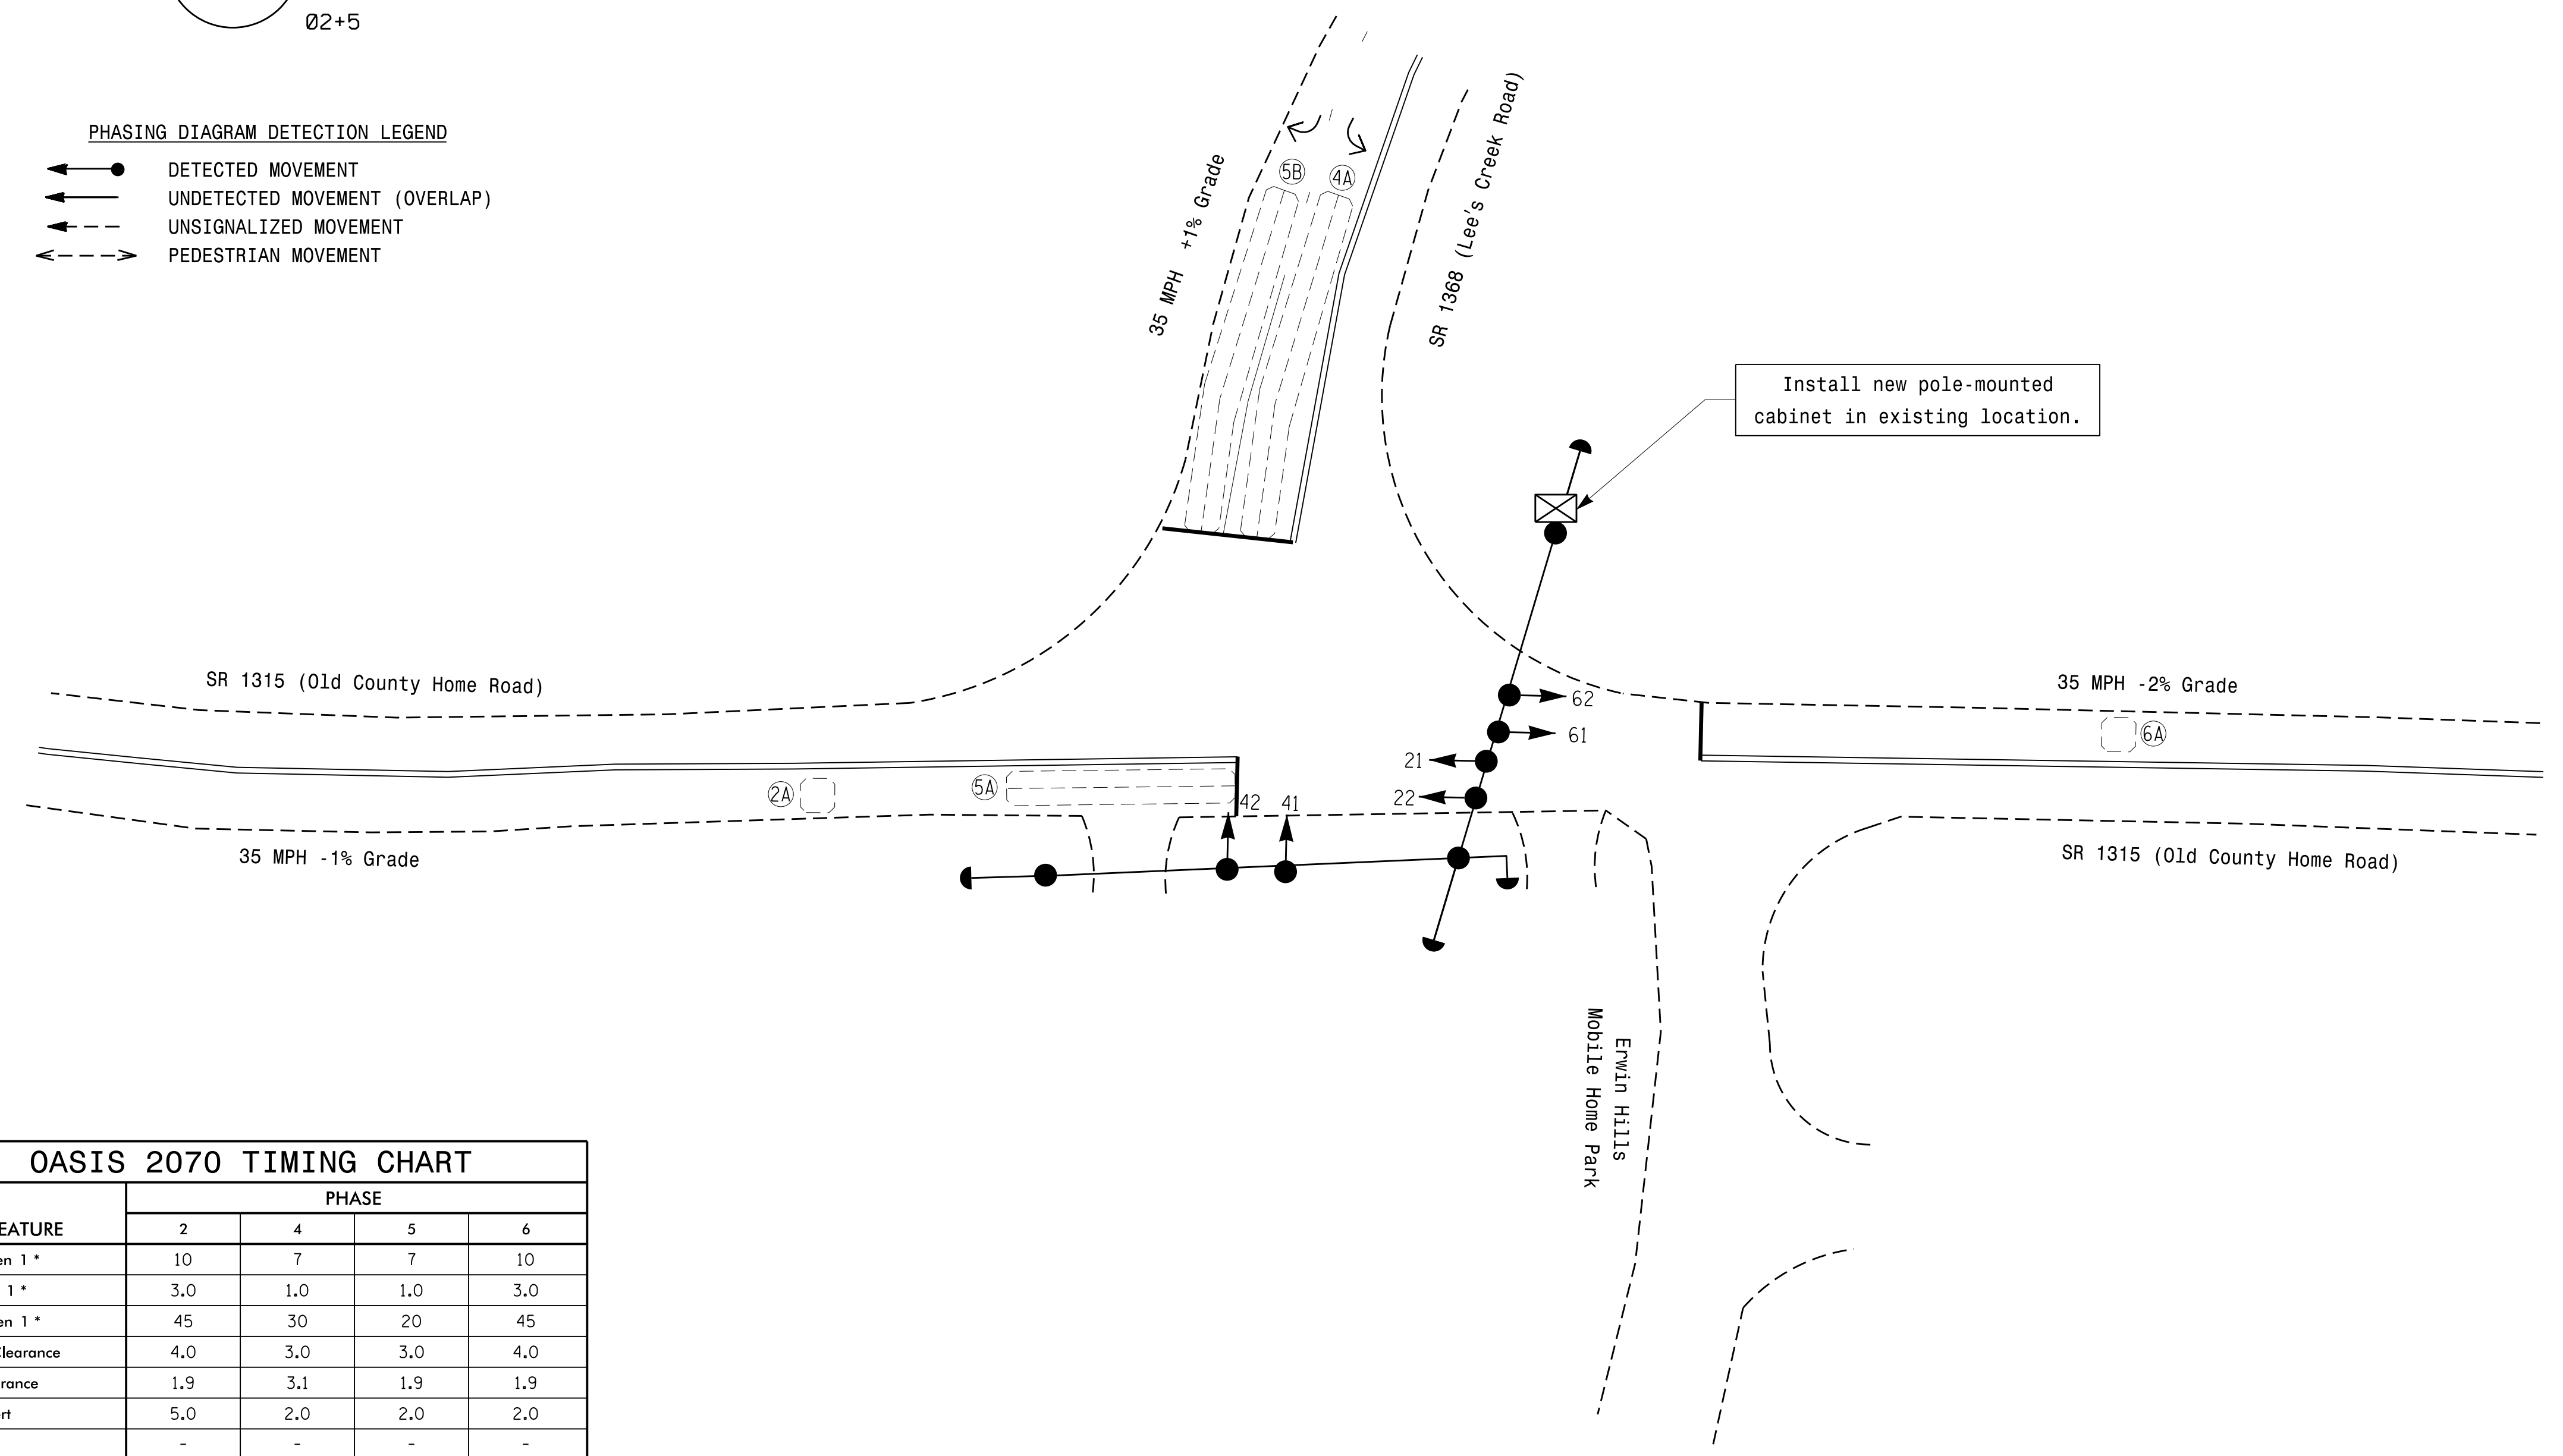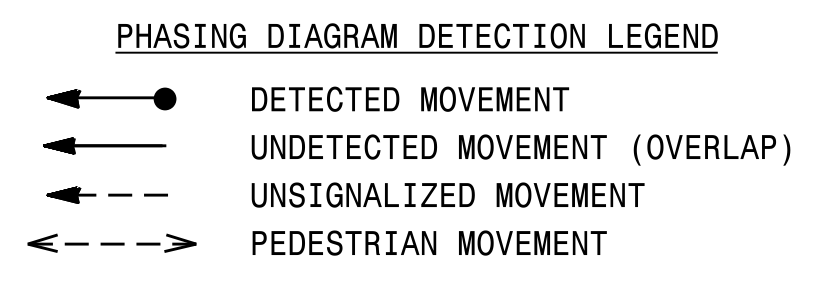

Install new pole-mounted cabinet in existing location.

FEATURE	PHASE			
	2	4	5	6
Min Green 1 *	10	7	7	10
Extension 1 *	3.0	1.0	1.0	3.0
Max Green 1 *	45	30	20	45
Yellow Clearance	4.0	3.0	3.0	4.0
Red Clearance	1.9	3.1	1.9	1.9
Red Revert	5.0	2.0	2.0	2.0
Walk 1 *	-	-	-	-
Don't Walk 1	-	-	-	-
Seconds Per Actuation *	-	-	-	-
Max Variable Initial *	-	-	-	-
Time Before Reduction *	-	-	-	-
Time To Reduce *	-	-	-	-
Minimum Gap	-	-	-	-
Recall Mode	MIN RECALL	-	-	MIN RECALL
Vehicle Call Memory	YELLOW	-	-	YELLOW
Dual Entry	-	-	-	-
Simultaneous Gap	ON	ON	ON	ON

* These values may be field adjusted. Do not adjust Min Green and Extension times for phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.

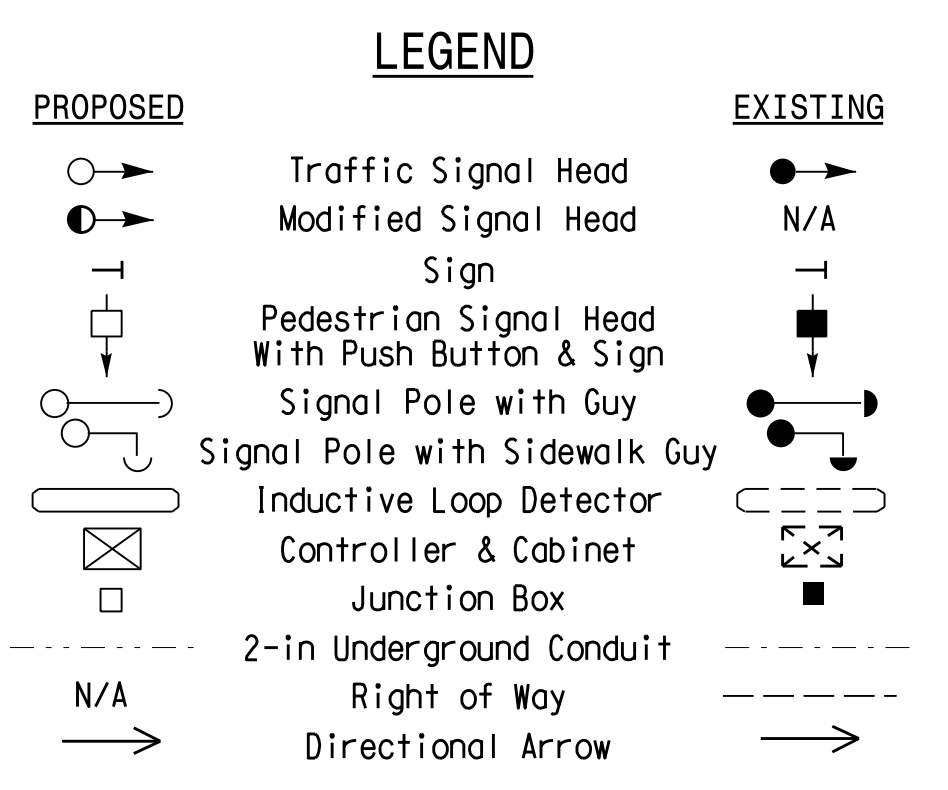

Signal Upgrade

SR 1315 (Old County Home Road) at SR 1368 (Lee's Creek Road)

Division 13 Buncombe County N of Asheville

PLAN DATE: July 2016 REVIEWED BY: T. J. Williams

PREPARED BY: C. Pierce REVIEWED BY:

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SEAL

PROFESSIONAL ENGINEER

STATE OF NORTH CAROLINA

24393

T. J. WILLIAMS

DocuSign by: T. J. Williams 8/30/2016

SIG. INVENTORY NO. 13-1003

750 N. Grantfield Pkwy, Garner, NC 27529

SCALE 0 20 1"=20'

30-AUG-2016 10:44
 S:\ITS\ASU\ITS_Signal\ASU\Sigonal\Design\Section\Western Region\01\13\1315-1368-4715B_Ashville\116_Signal_System\4Signal_Design\13-1003\131003_sig_dsn_2016mdd.dgn
 cep/ence