

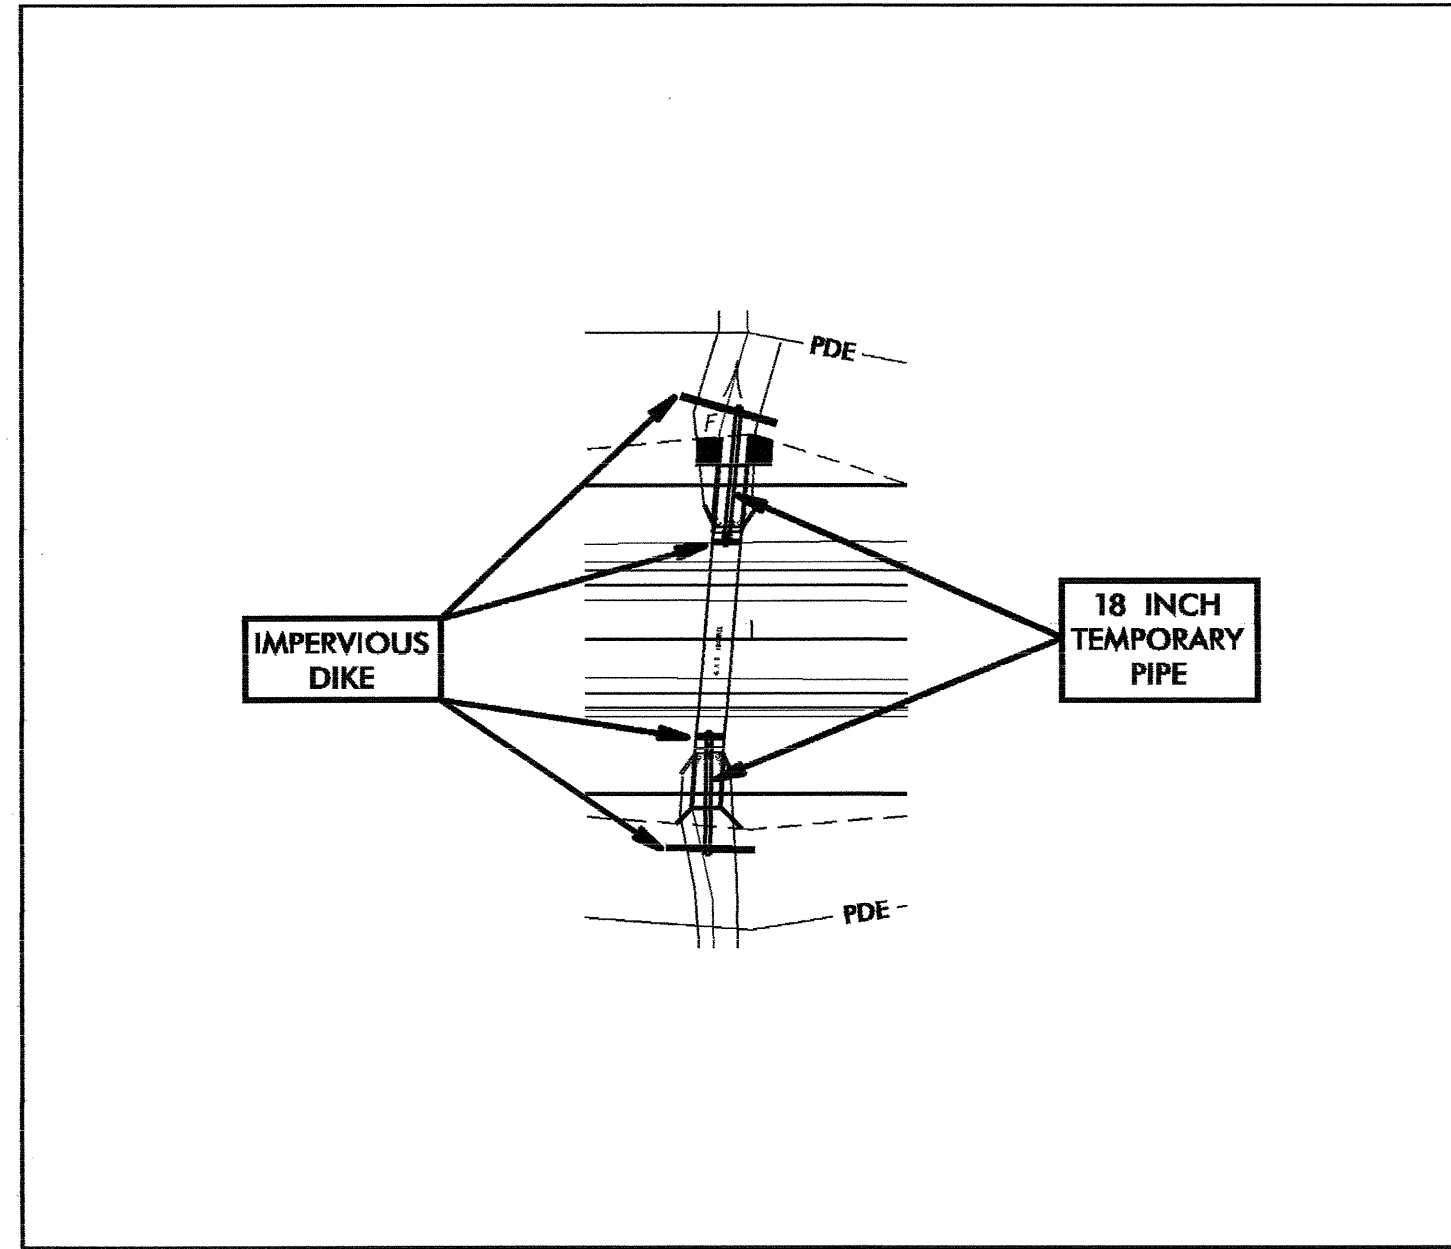


PROJECT REFERENCE NO.	SHEET NO.
R-3427	EC-5/CONST.5
RW SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

7/12/99

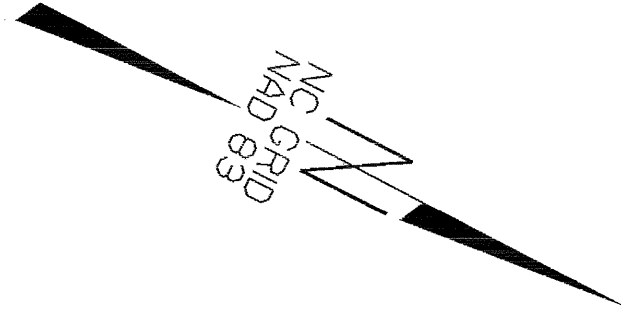

- CULVERT CONSTRUCTION SEQUENCE (STA. 25+91.6 -L-)**
1. CONSTRUCT CHANNEL REALIGNMENTS AND STABILIZE.
 2. INSTALL IMPERVIOUS DIKES AND PLACE 18 INCH TEMPORARY PIPE TO CONVEY FLOW THROUGH EXISTING 6' X 6' BOX CULVERT.
 3. PUMP EFFLUENT FROM CONSTRUCTION ZONE INTO SPECIAL STILLING BASIN(S) AS DIRECTED BY ENGINEER.
 4. CONSTRUCT UPSTREAM AND DOWNSTREAM EXTENSIONS OF EXISTING 6' X 6' BOX CULVERT.
 5. REMOVE IMPERVIOUS DIKES AND 18 INCH TEMPORARY PIPE.
 6. COMPLETE ROADWAY.

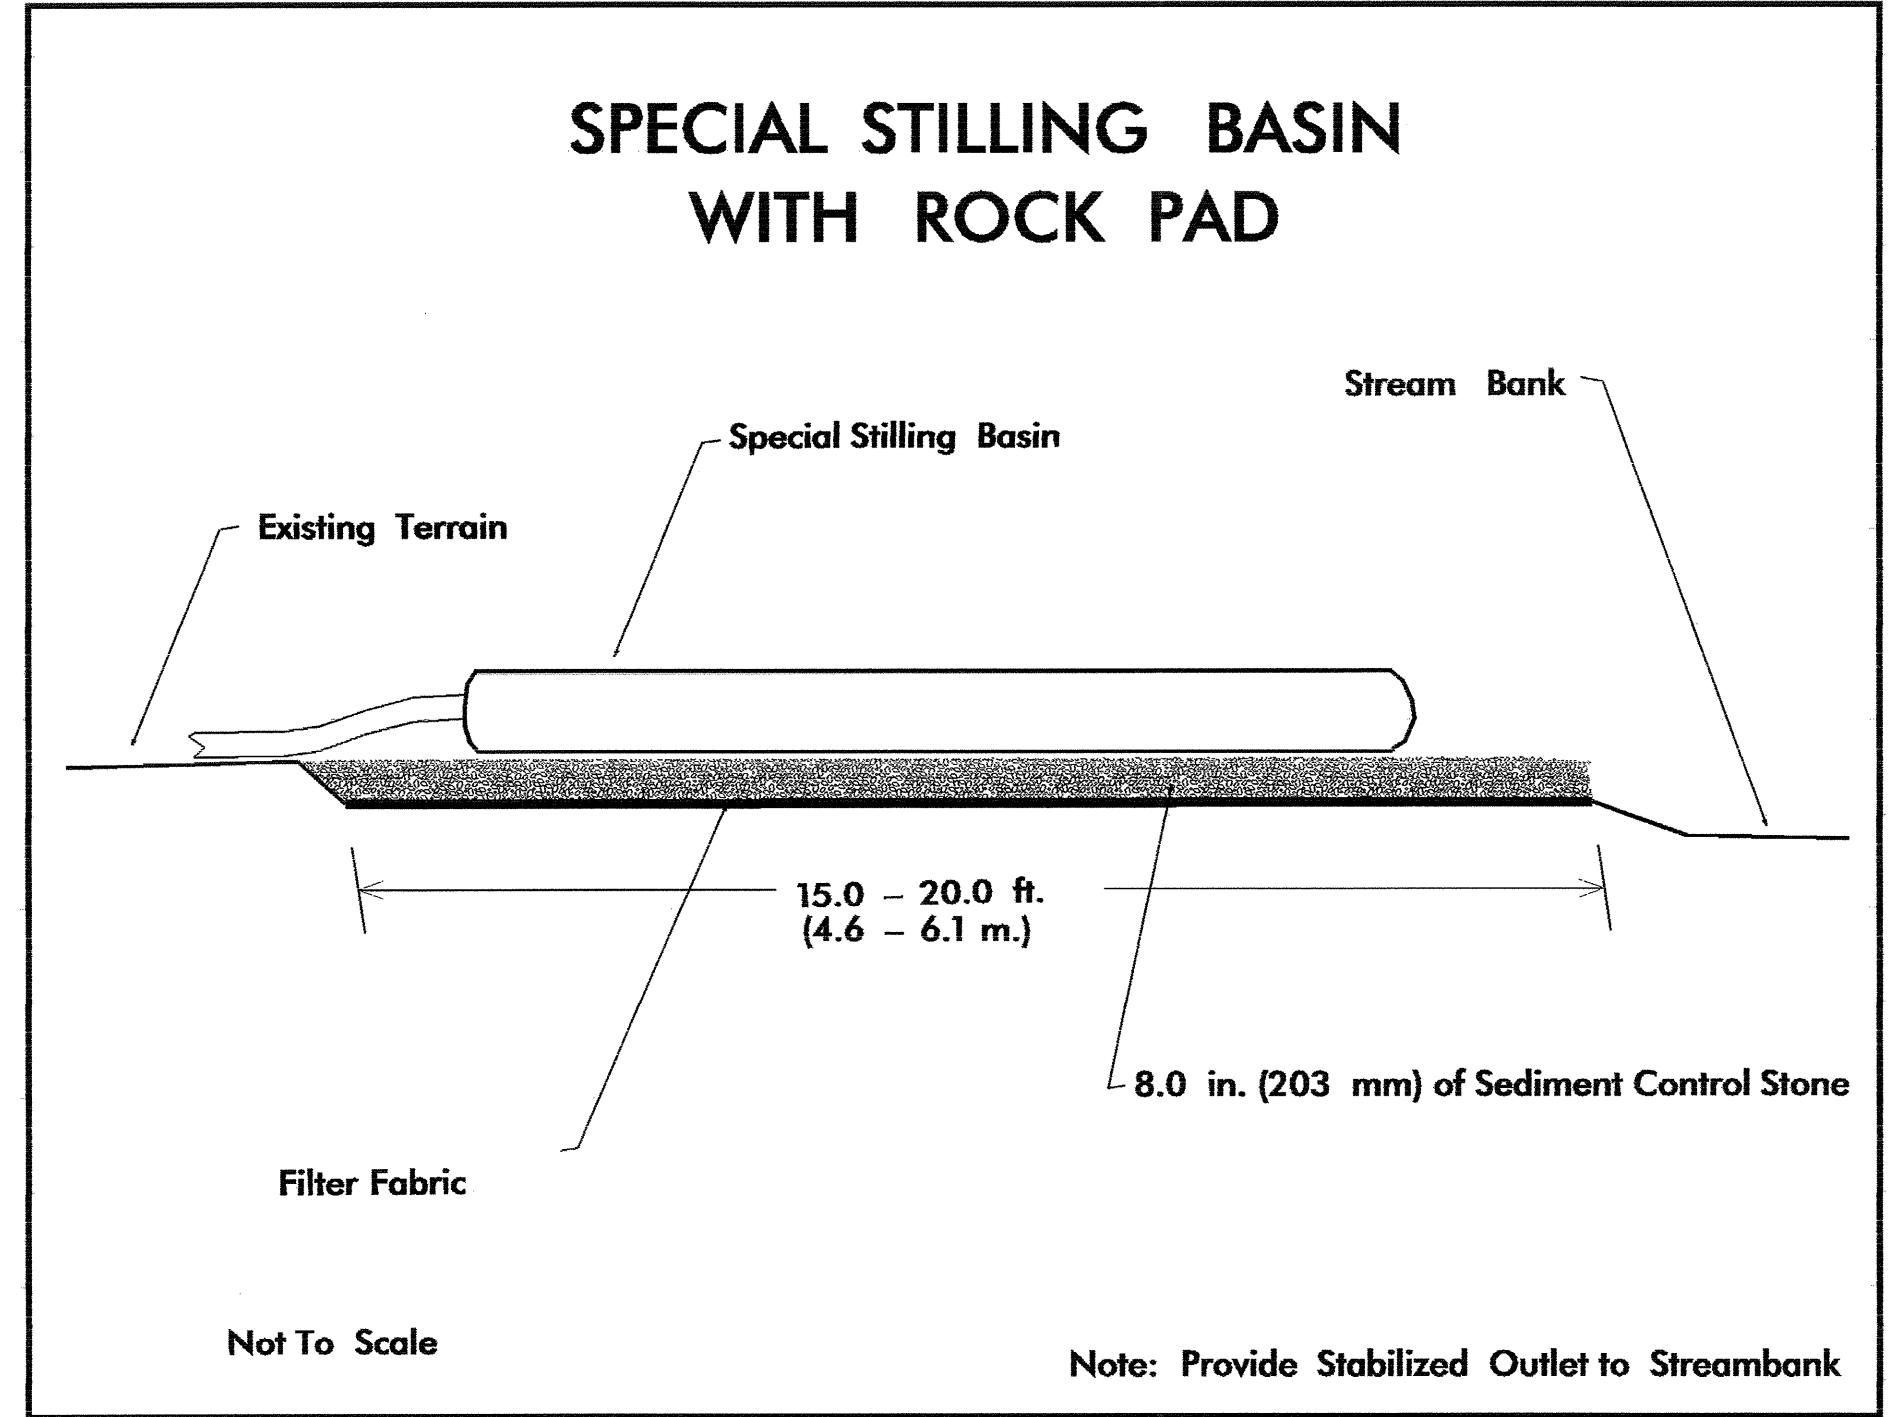

28-SEP-2004 11:27 AM R-3427-Roadway-ps5r-3427.rps
 C:\rockbur