PROJECT REFERENCE NO.

PREEMPTION PROGRAMMING

Front Panel

Main Menu >Controller >Preemption >Preempt Phasing/Preempt Parameters

Web Interface

Home >Controller >Preempt Configuration >Preempts


Preempt Configuration

Preempt	1		
Enabled	Enabled		
Туре	Rail Road		
Track Phases	1, 6, 39		
Track Overlaps	1, 2, 3		
Dwell Phases	3		
Dwell Peds	<u>-</u>		
Dwell Overlaps	5		
Cycling Phases	3, 5		
Cycling Peds	-		
Cycling Overlaps	3, 5		
Exit Phases	2, 6		
Exit Overlaps	1, 2, 3		
Delay	0		
Call Ext Time	1:0		
Max Presence	0		
Max Pres Act	Terminate		
Enter Min Green	1		
Enter Walk	1		
Enter Ped Clear	0		
Enter Yellow Change	4.6		
Enter Red Clear	3.3		
Track Green	37		
Track Yellow Clr	4.6		
Track Red Clear	2.6		
Dwell Green	7		
Exit Min Green	255		
Exit Yellow Change	25.5		
Exit Red Clear	25.5		
Exit Type	Exit Phases		
Non Locking Memory	<u>÷</u>		
Not Ovrd Flash	X		
Not Ovrd Nxt Pre	-		
Require All Red Entry	÷		
Track Clear Ovrd	Х		
Ped Clear During Yellow	<u> </u>		
Entry Omit OLTG	X		
Track Reserve	Х		

RAILROAD PREEMPTION WIRING DETAIL

(wire as shown below)


PREEMPTION AND BLANKOUT SIGN CONTROL BOX

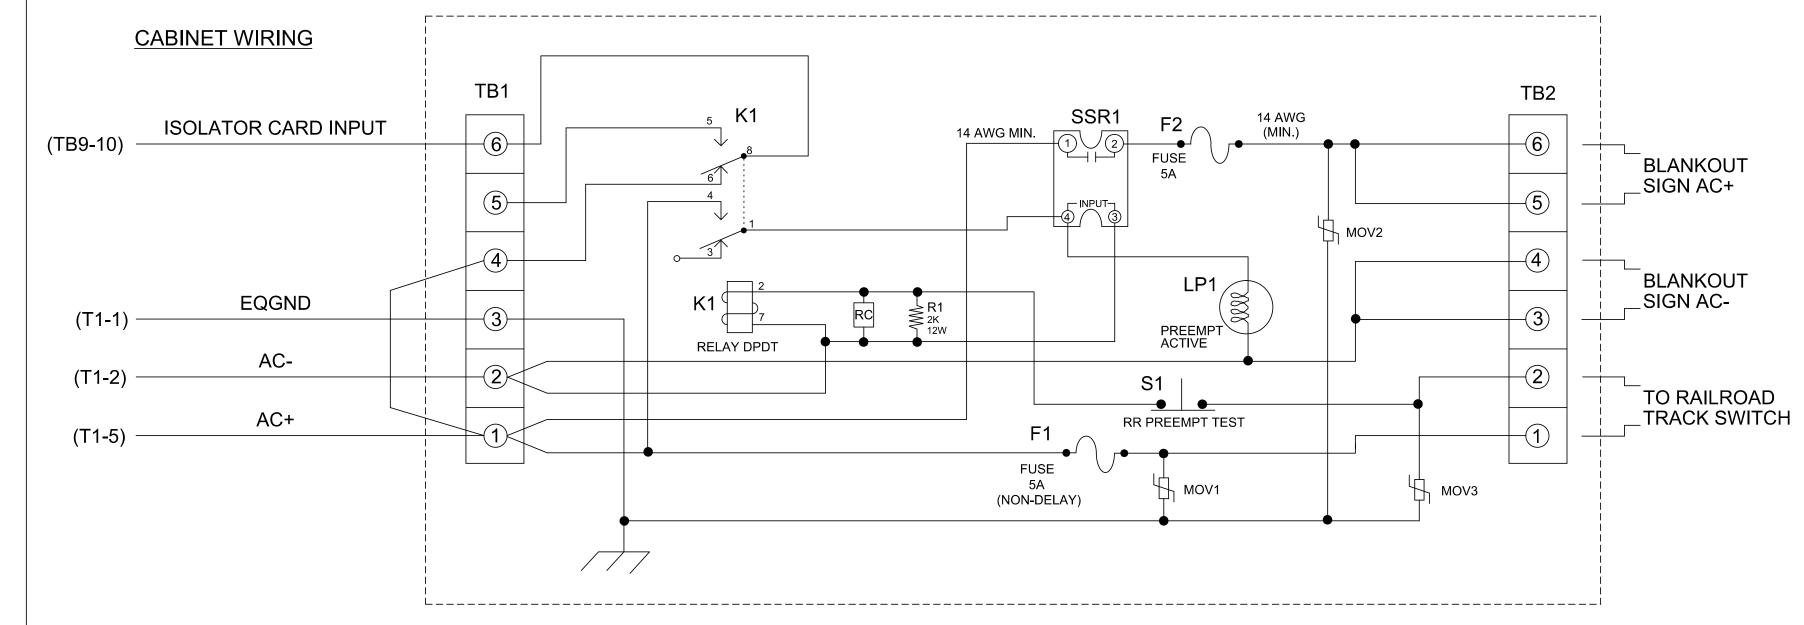

NOTES


- 1. Relay K1 is shown in the energized (Preempt not active) normal operation state.
- 2. Relay K1 is a DPDT with 120VAC coil with octal base.
- 3. Relay SSR1 is a SPST (normally open) Solid State Relay with AC input and AC (25 amp) output.
- 4. AC Isolator Card shall activate preemption upon removal of AC+ from the input (as shown above). To accomplish this set invert dip switch on AC Isolator Card.
- 5. IMPORTANT!! A jumper must be added between input file terminals J14-E and J14-K if not already present. Also, terminal TB9-12 (on input panel) shall be connected to AC neutral (jumper may have to be added).

FRONT VIEW

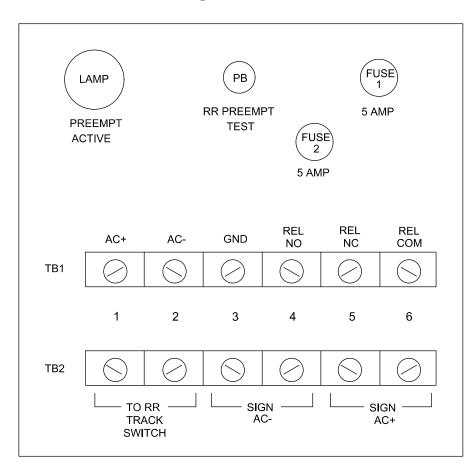


PREEMPT 1 AC ISOLATOR (MODEL 252) OUTPUT PROGRAMMING DETAIL

(set DIP switches as shown below)

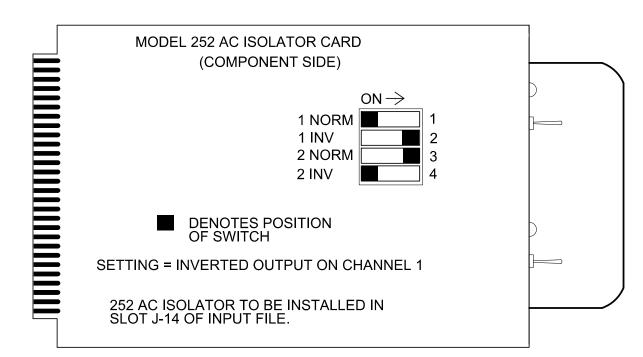

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 06-1387T1 DESIGNED: Feb 2025 SEALED: 3/19/2025 **REVISED:**

Temporary Design 1 - TMP Phase III, Step 3 Electrical Detail - Sheet 3 of 4



NC 211 (N. Roberts Avenue)

Boomerang Drive / Restaurant Driveway

	_			-
Division 6	Robeson County		Lumberton	
PLAN DATE:	Feb 2025	REVIEWED BY:	H.M. Surti	
PREPARED BY:	J.C. Grimm	REVIEWED BY:	T.M. Moody	
REVISIONS			INIT.	DATE

3/19/2025 DATE SIG. INVENTORY NO. 06-1387T1

SEAL 040329

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

Charlotte, NC 28202 (704) 372-1885 NC License Number F-0991

STV Engineers, Inc. 900 West Trade St., Suite 715

750 N. Greenfield Pkwy, Garner, NC 27529