

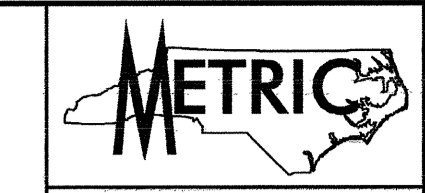
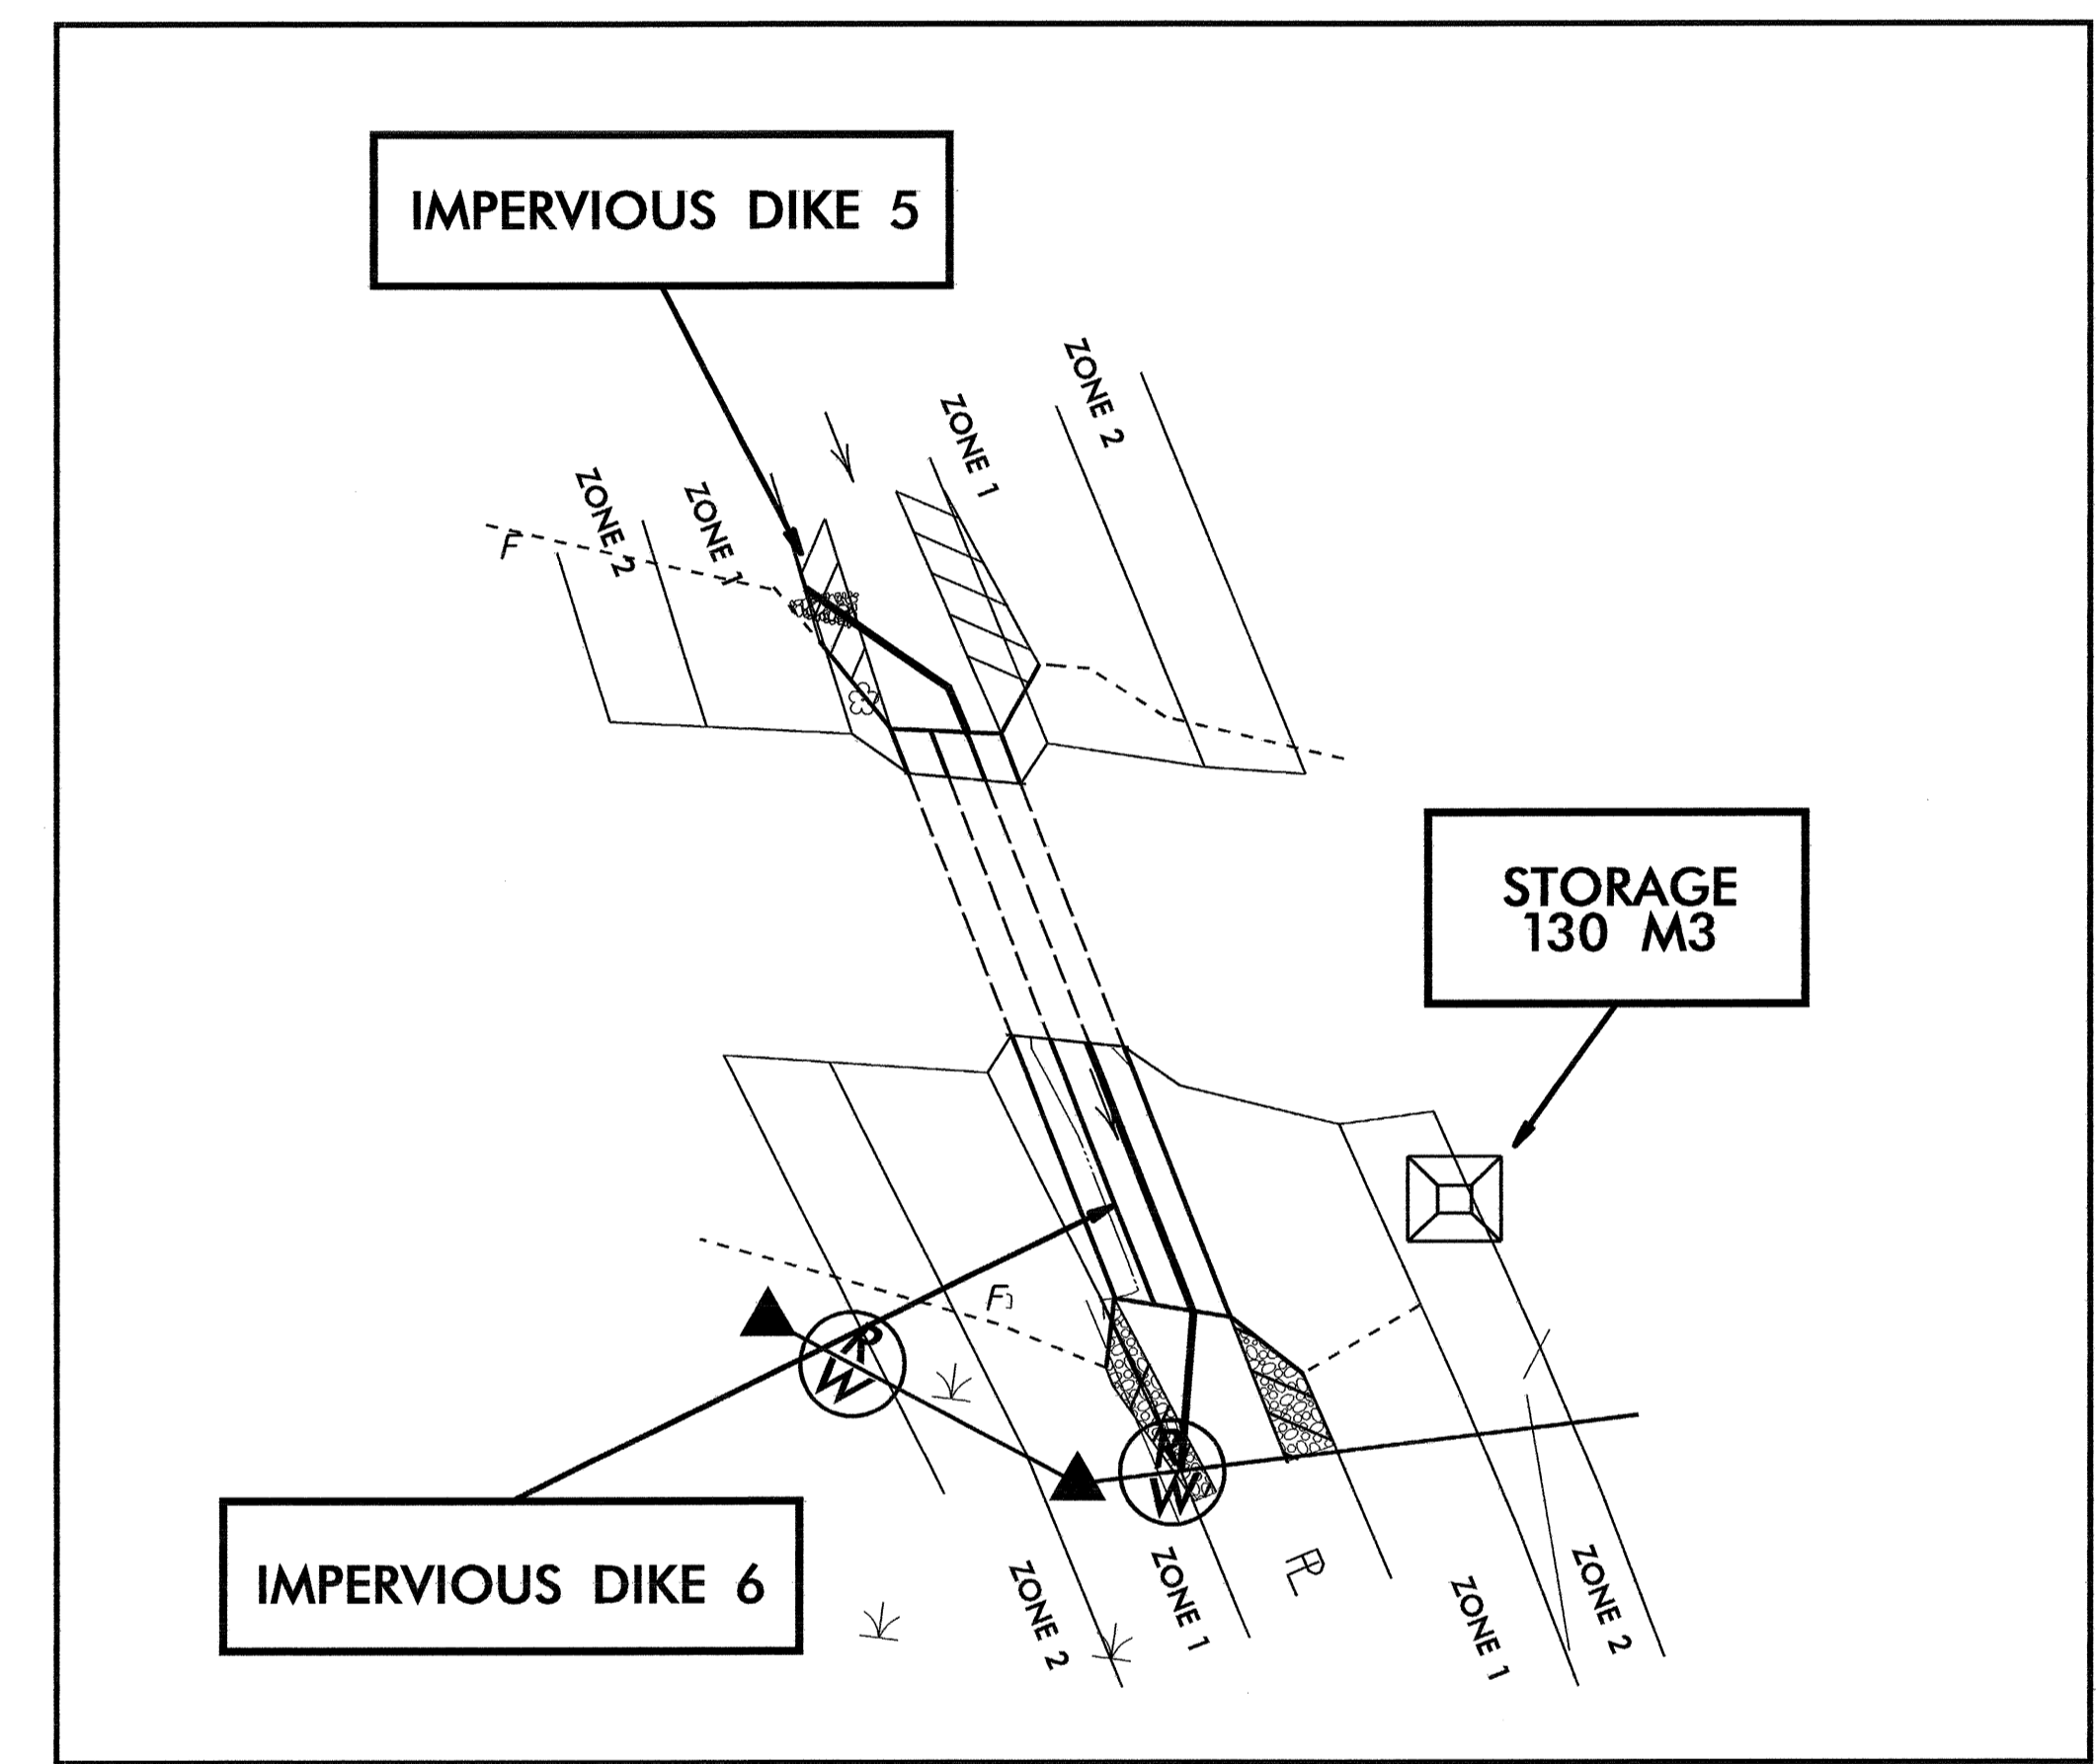
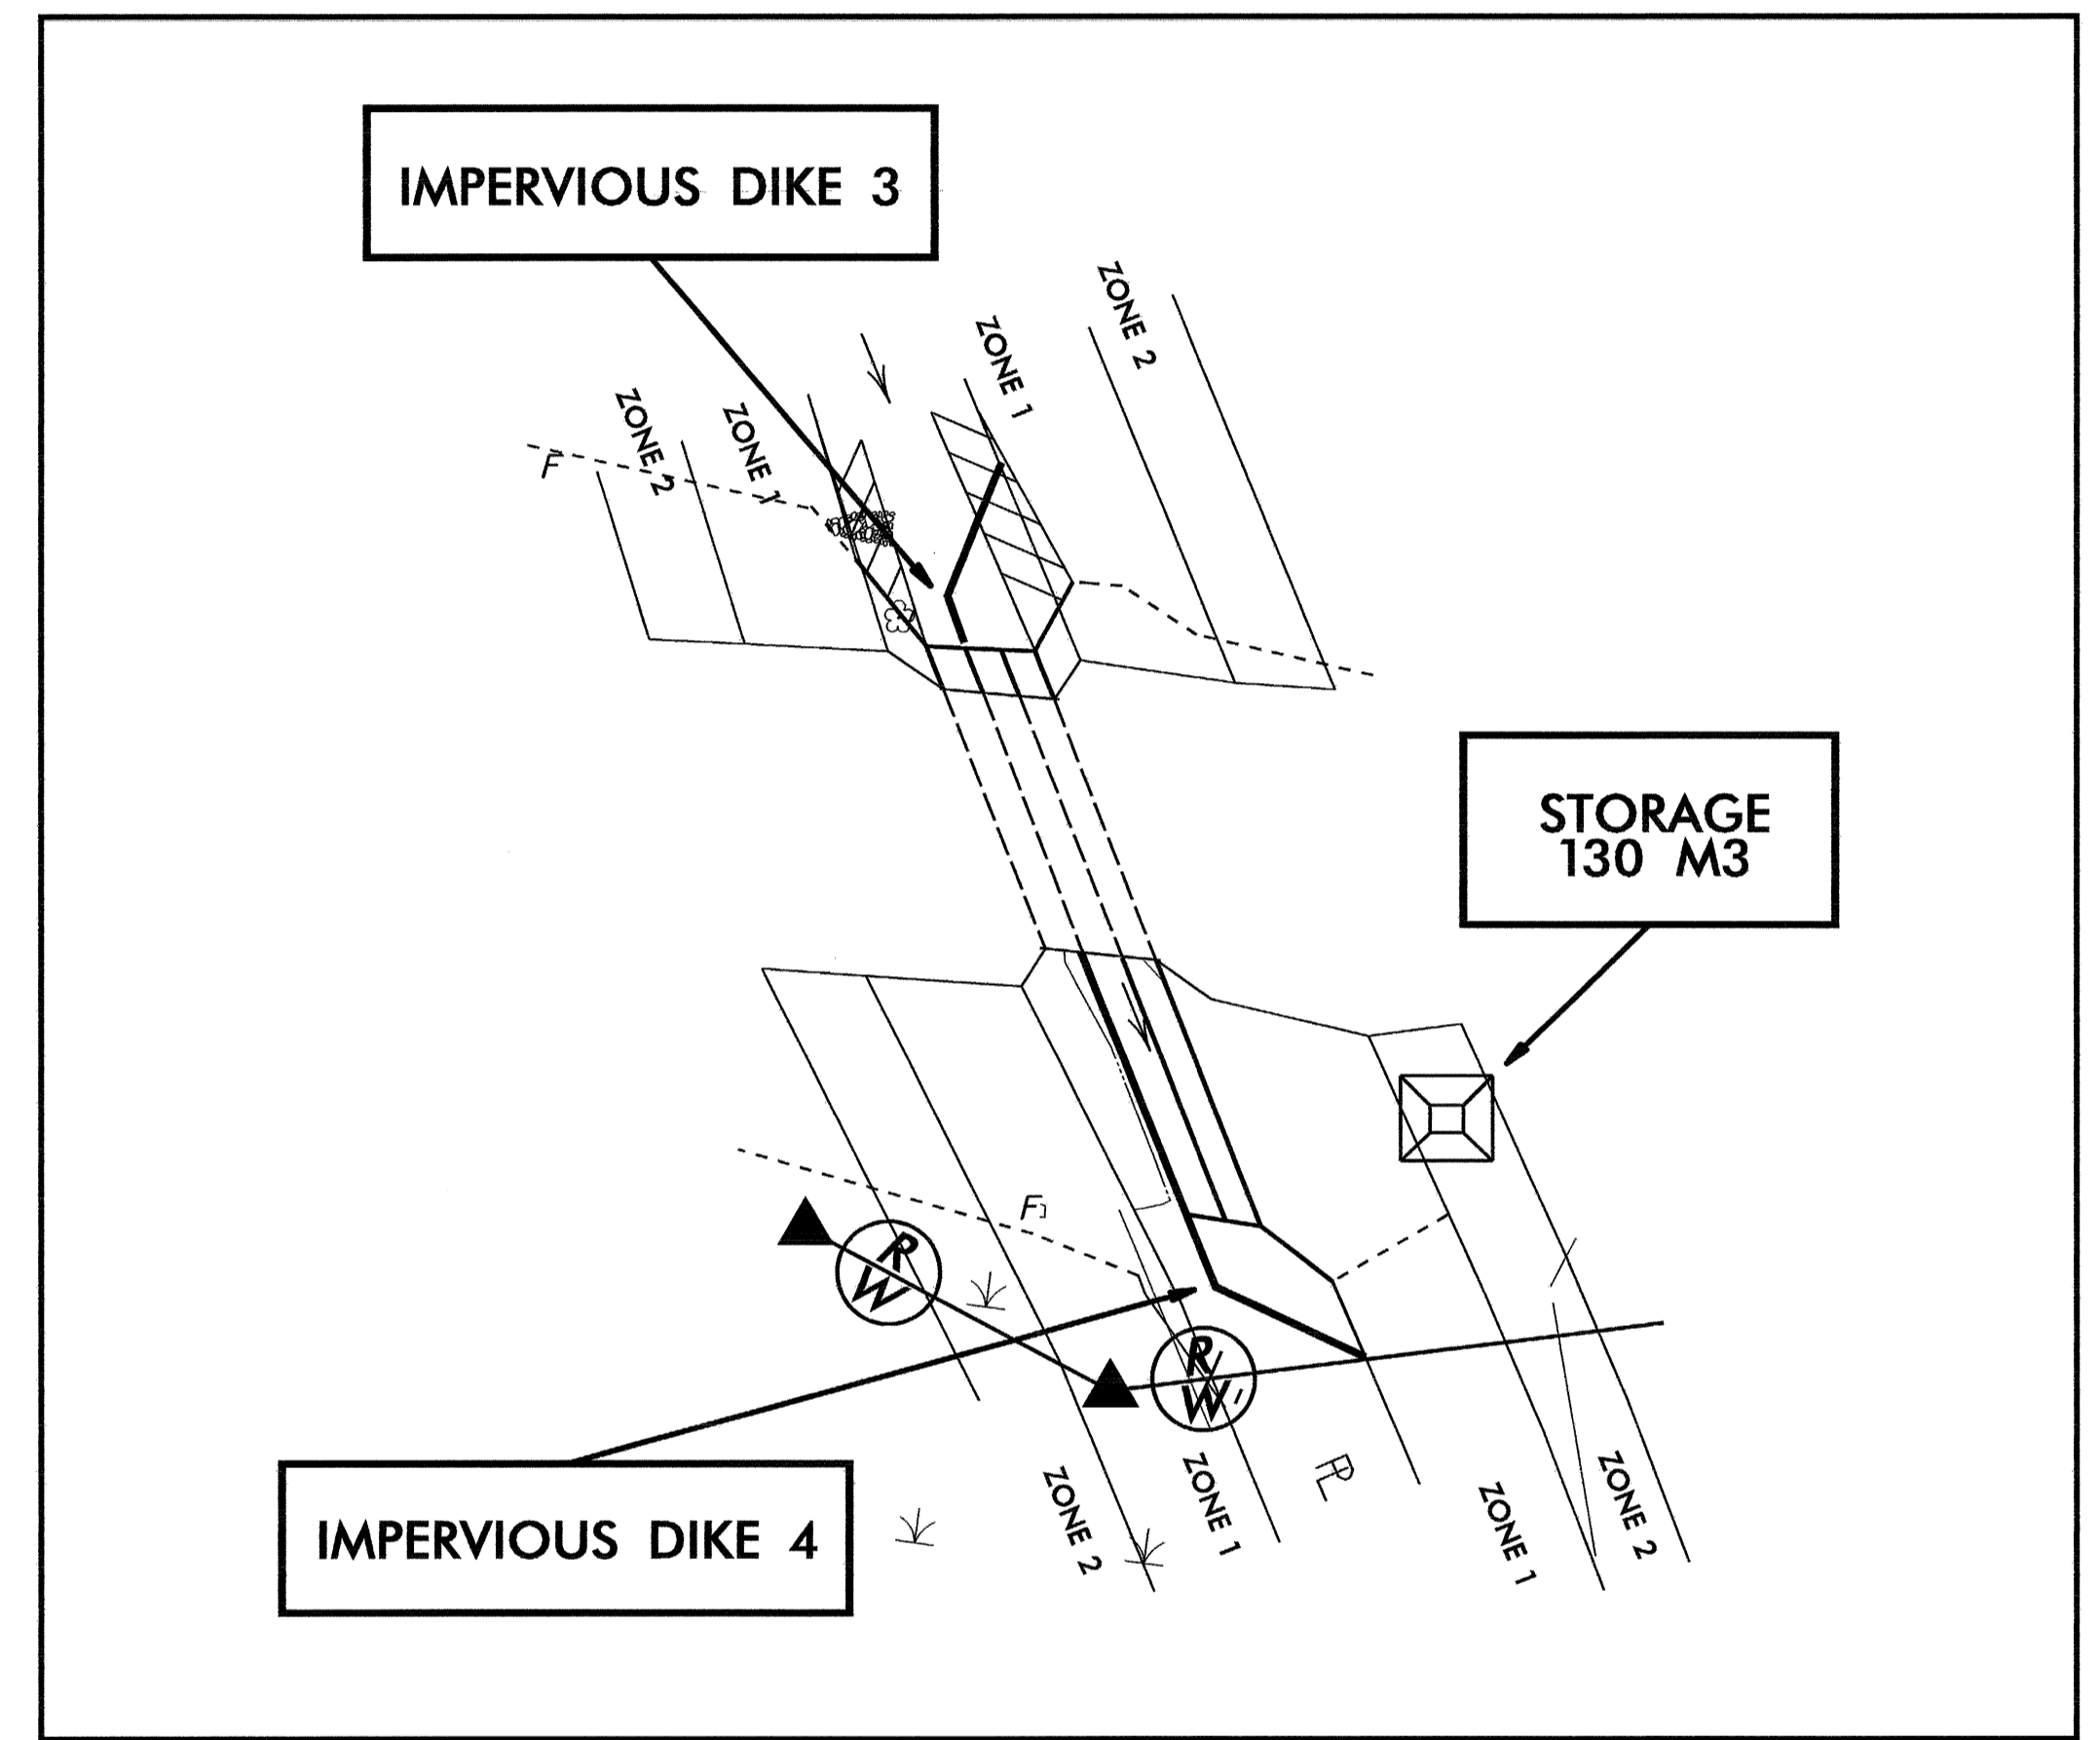


6/10/99

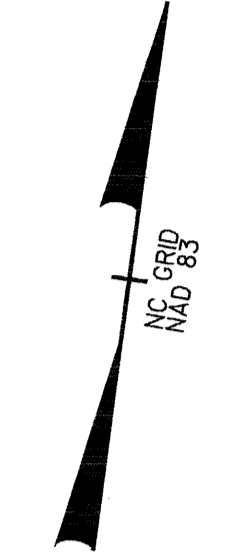

PROJECT REFERENCE NO.	SHEET NO.
R-2539C	EC-17/CONST.16
R/W SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER
CONST.REV.	
R/W REV.	



- CONSTRUCTION SEQUENCE PHASE II (STA 196+60)**
1. CONSTRUCT STILLING BASIN (130 m3)
 2. INSTALL IMPERVIOUS DIKE 3 & 4. DIVERT FLOW THROUGH WEST MOST BARREL.
 3. CONSTRUCT EXTENSION OF MIDDLE AND EAST MOST BARREL.
 4. REMOVE IMPERVIOUS DIKE 3 & 4. CONSTRUCT IMPERVIOUS DIKE 5 & 6, DIVERT FLOW THROUGH EAST MOST BARREL.
 5. CONSTRUCT EXTENSION OF WEST MOST BARREL AND DOWNSTREAM CHANNEL IMPROVEMENTS.
 6. REMOVE DIKE 5 & 6, STILLING BASIN AND CONSTRUCT ROADWAY.

04-NOV-2004 13:27
D:\You\Projects\2539C\16.PSH
m:\gibtech