6/2/99

PAVEMENT SCHEDULE FINAL PAVEMENT DESIGN	
C1	1.5″ S9.5B
C2	3″ S9.5B
C3	VAR. S9.5B
C4	1.5″ S9.5C
C5	3″ S9.5C
C6	VAR. S9.5C
C7	2.5″ SF9.5A
C8	VAR. SF9.5A
D1	2.5″ I19.0B
D2	4″ I19.0B
D3	VAR. I19.0B
D4	4″ I19.0C
D5	VAR. I19.0C
E1	4″ B25.0B
E2	4.5″ B25.0B
E3	5.5″ B25.0B
E4	VAR. B25.0B
E5	4.5″ B25.0C
E6	VAR. B25.0C
J1	10″ ABC
J2	VAR. ABC
P	PRIME COAT
R1	2′-6″ C & G
R2	EXP. GUTTER
R3	1′-6″ C & G
R4	5″ CONC. ISLD.
T	EARTH MATERIAL
U	EXIST. PAVEMENT
W	WEDGING

PROJECT REFERENCE NO.	SHEET NO.
R-4903	2A-4

ROADWAY DESIGN ENGINEER
NORTH CAROLINA PROFESSIONAL SEAL 027373 ENGINEER SUSAN C. LANCASTER
DocuSigned by: Susan C. Lancaster 10/7/2014

PAVEMENT DESIGN ENGINEER
NORTH CAROLINA PROFESSIONAL SEAL 022896 ENGINEER CLARK S. MORRISON
DocuSigned by: Clark S. Morrison 10/7/2014

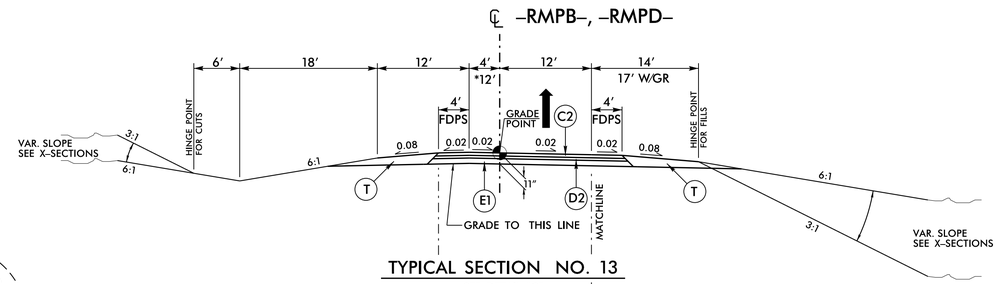

TYPICAL SECTION NO. 13
SEE DETAIL "C"



DETAIL "C"
ALTERNATE PAVEMENT DESIGN



TYPICAL SECTION NO. 13–A
SEE DETAIL "E"



DETAIL "E"
ALTERNATE PAVEMENT DESIGN



TYPICAL SECTION NO. 13–B
SEE DETAIL "F"



DETAIL "F"
ALTERNATE PAVEMENT DESIGN



DETAIL "G"
ALTERNATE PAVEMENT DESIGN

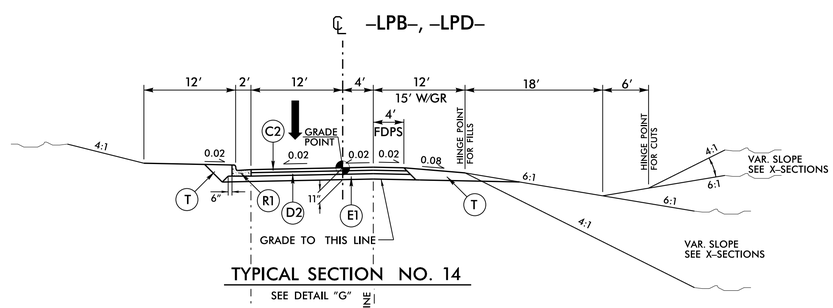

TYPICAL SECTION NO. 14
SEE DETAIL "G"



TYPICAL SECTION NO. 14–B
SEE DETAIL "F"

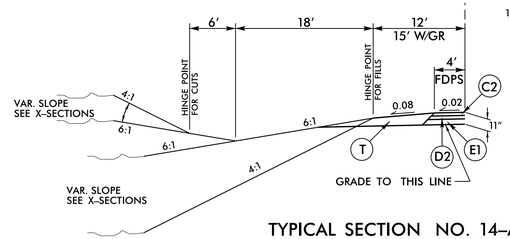

TYPICAL SECTION NO. 14–A
SEE DETAIL "C"

USE TYPICAL SECTION NO. 13
–RMPB– STA. 10+00.00 TO STA. 27+11.47
–RMPD– STA. 10+00.00 TO STA. 23+66.24

* TRANSITION –RMPB– LT FROM 4′ TO 12′
–RMPB– STA. 21+92.25 TO 24+12.25 LT

* TRANSITION –RMPD– LT FROM 4′ TO 12′
–RMPD– STA. 18+50.00 TO 20+70.00 LT

USE TYPICAL SECTION NO. 13–A
–RMPB– STA. 20+00.00 TO STA. 23+50.00 RT

USE TYPICAL SECTION NO. 13–B
–RMPB– STA. 24+12.25 TO STA. 25+63.00 LT
–RMPD– STA. 21+06.23 TO STA. 22+17.50 LT

USE TYPICAL SECTION NO. 14
–LPB– STA. 10+00.00 TO STA. 19+48.68
–LPD– STA. 10+00.00 TO STA. 18+97.80

USE TYPICAL SECTION NO. 14–A
–LPB– STA. 10+00.00 TO STA. 11+65.00 LT
–LPB– STA. 18+37.94 TO STA. 19+48.68 LT
–LPD– STA. 10+00.00 TO STA. 11+55.00 LT
–LPD– STA. 17+87.49 TO STA. 18+97.80 LT

USE TYPICAL SECTION NO. 14–B
–LPB– STA. 16+51.70 TO STA. 17+99.00 RT
–LPD– STA. 16+36.24 TO STA. 17+48.00 RT

30-SEP-2014 14:47
R:\Roadway\Proj\R4903_Rdy_typ.dgn
$$$$USERNAME$$$$