DocuSign Envelope ID: 6F43BBDB-21EE-403D-B7D9-F029B1CC8FA6

PROJECT REFERENCE NO.	SHEET NO.
R-2123CG	ITS-30

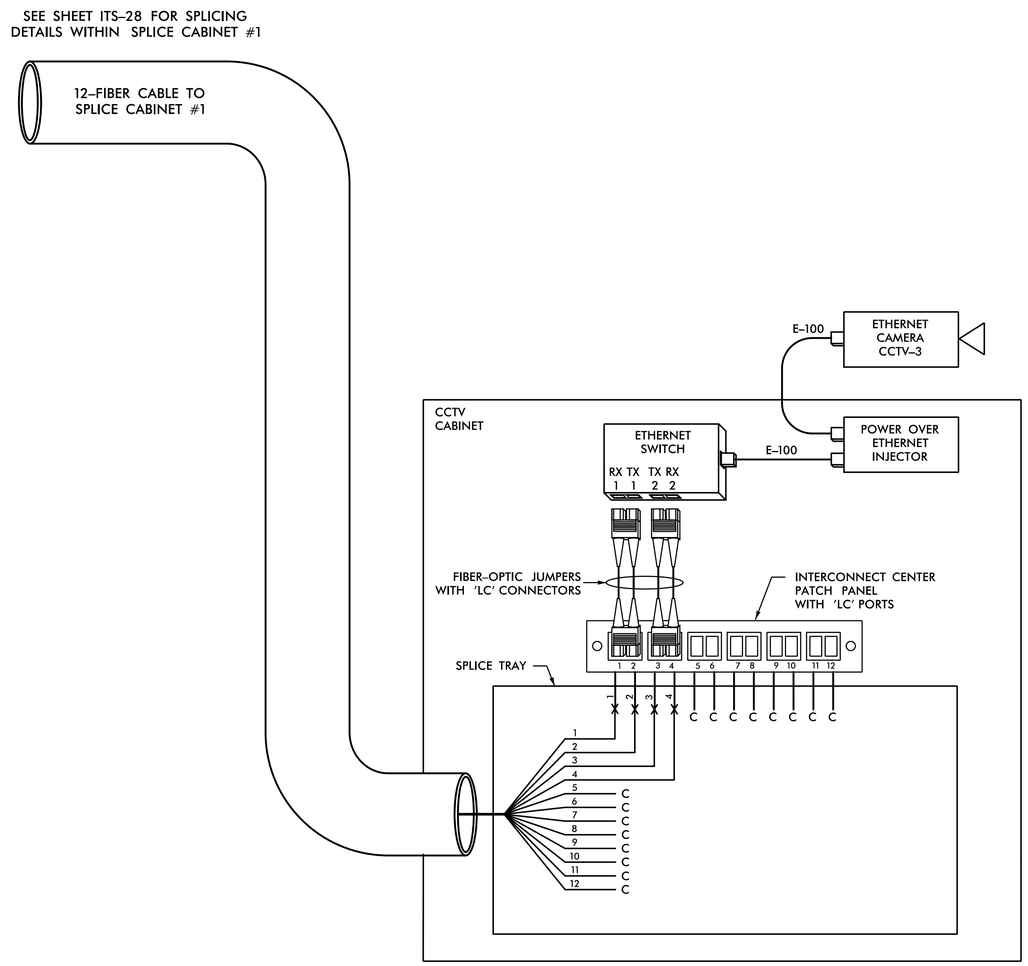

CCTV-3

LEGEND

COLOR CODE TIA/EIA 598-C

(1)	BLUE	(7)	RED
(2)	ORANGE	(8)	BLACK
(3)	GREEN	(9)	YELLOW
(4)	BROWN	(10)	VIOLET
(5)	SLATE	(11)	ROSE
(6)	WHITE	(12)	AQUA

X = NEW FUSION SPLICE INDIVIDUAL FIBER

● = EXISTING FUSION SPLICE

C = CAP AND SEAL

EXPRESS = EXPRESS ENTIRE BUFFER TUBE THROUGH WITHOUT CUTTING

BUFFER SPLICE = SPLICE ALL FIBERS IN BUFFER TUBE COLOR TO COLOR

NOTES

1. UNUSED FIBERS LEFT COILED AND STORED IN SPLICE TRAY.
2. UNUSED BUFFER TUBES LEFT COILED AND STORED IN SPLICE ENCLOSURE.
3. ETHERNET SWITCH TERMINATION CONFIGURATIONS ARE GENERIC. CONTRACTOR IS RESPONSIBLE FOR DETERMINING/ ENSURING PROPER TERMINATION.

HNTB
HNTB NORTH CAROLINA, P.C.
343 E. Six Forks Road, Suite 200
Raleigh, North Carolina 27609
NC License No: C-1554

Plans Prepared for:
STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
Transportation Mobility and Safety Division
Integrated Transportation Science Section
750 N. Greenfield Pkwy., Garner, NC 27529

CCTV-3
FIBER-OPTIC SPLICE DETAIL

DIVISION 10 MECKLENBURG CO. CHARLOTTE

PLAN DATE:	DECEMBER 2014	REVIEWED BY:	A.D. KLINKSIEK
PREPARED BY:	T.R. TERRELL	REVIEWED BY:	H.L. WINSTEAD

SCALE	REVISIONS	INIT.	DATE
NONE			

SEAL
NORTH CAROLINA PROFESSIONAL SEAL 07983 ENGINEER HARVEY L. WINSTEAD, JR.

DocuSigned by: H.L. Winstead 12-18-2014
F62917C5CE07429...
SIGNATURE DATE

CADD Filename: R2123CG_ITS-30.dgn