PROJ. REFERENCE NO.	SHEET NO.	TOTAL SHEETS
ALEXANDER COUNTY	5	
STATE PROJ. NO.	F.A. PROJ. NO.	DESCRIPTION
12CR.10021.13		PRIMARY RESURFACING
12CR.20021.20		SECONDARY RESURFACING

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 2.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
C2	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
E	PROP. APPROX. 5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 570 LBS. PER SQ. YD.
T	AGGREGATE SHOULDER BORROW (SHOULDER RECONSTRUCTION)
Y	MILLED RUMBLE STRIPS
Z	MILL EXISTING ASPHALT PAVEMENT APPROX. 5/8" IN DEPTH

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

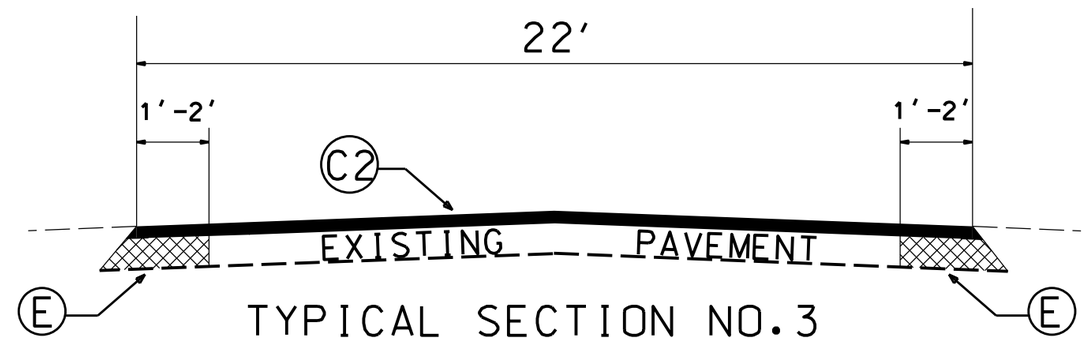

TYPICAL SECTION NO.3

MAP #3 (Sta. 0+00 - 19+30)

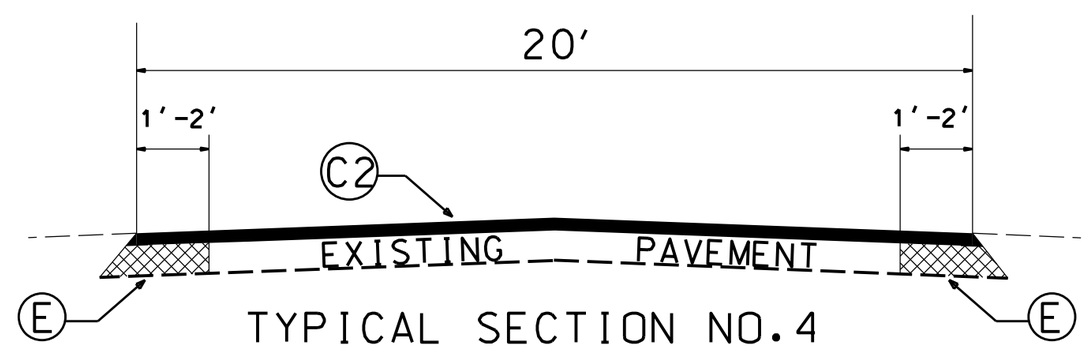

TYPICAL SECTION NO.4

MAP #3 (Sta. 19+30 - 64+00)

2015 - 2016
Resurfacing Program
Typical Sections
Alexander County