


LEVEL III CERTIFIED BY:
 STACEY H. BAILEY, PE
 CERTIFICATION NUMBER: 3074
 ISSUED: SEPTEMBER 15, 2014

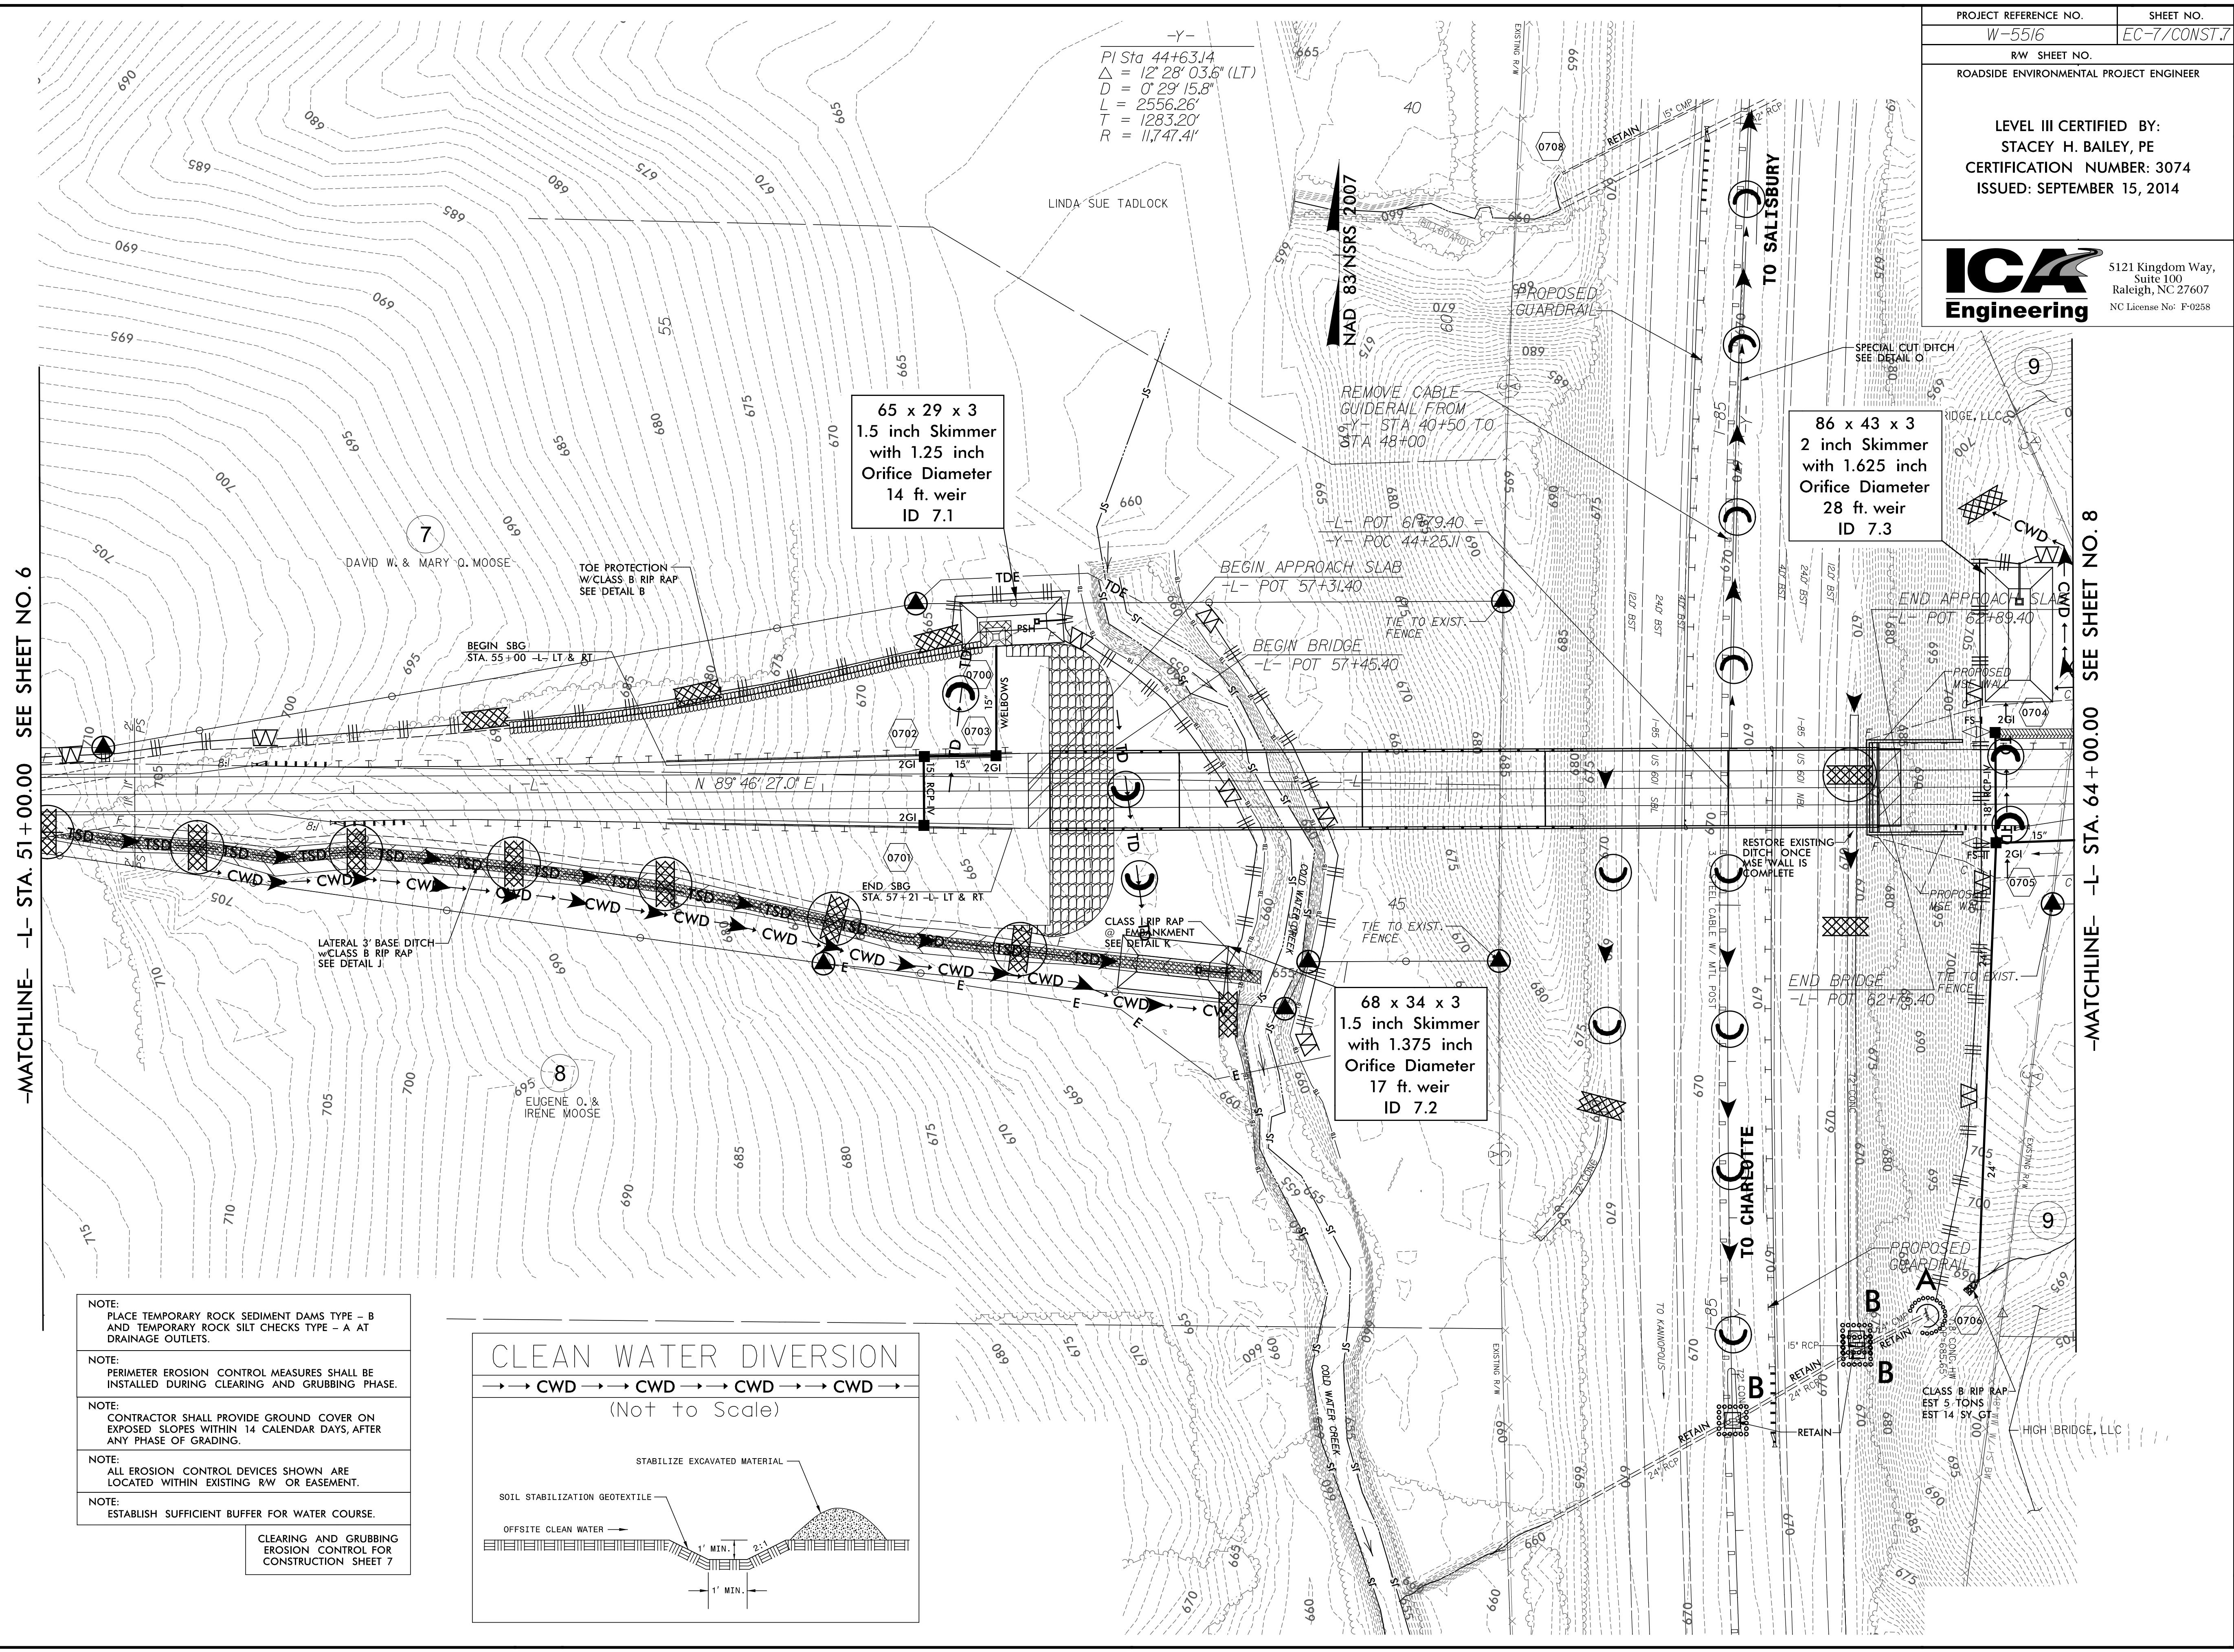

-Y-
 PI Sta 44+63.14
 $\Delta = 12' 28" 03.6" (LT)$
 $D = 0' 29" 15.8"$
 $L = 2556.26'$
 $T = 1283.20'$
 $R = 11,747.41'$

65 x 29 x 3
 1.5 inch Skimmer
 with 1.25 inch
 Orifice Diameter
 14 ft. weir
 ID 7.1

86 x 43 x 3
 2 inch Skimmer
 with 1.625 inch
 Orifice Diameter
 28 ft. weir
 ID 7.3


68 x 34 x 3
 1.5 inch Skimmer
 with 1.375 inch
 Orifice Diameter
 17 ft. weir
 ID 7.2

-MATCHLINE- L- STA. 51+00.00 SEE SHEET NO. 6

-MATCHLINE- L- STA. 64+00.00 SEE SHEET NO. 8

- NOTE:
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B AND TEMPORARY ROCK SILT CHECKS TYPE - A AT DRAINAGE OUTLETS.
- NOTE:
PERIMETER EROSION CONTROL MEASURES SHALL BE INSTALLED DURING CLEARING AND GRUBBING PHASE.
- NOTE:
CONTRACTOR SHALL PROVIDE GROUND COVER ON EXPOSED SLOPES WITHIN 14 CALENDAR DAYS, AFTER ANY PHASE OF GRADING.
- NOTE:
ALL EROSION CONTROL DEVICES SHOWN ARE LOCATED WITHIN EXISTING RW OR EASEMENT.
- NOTE:
ESTABLISH SUFFICIENT BUFFER FOR WATER COURSE.

CLEAN WATER DIVERSION
 (Not to Scale)

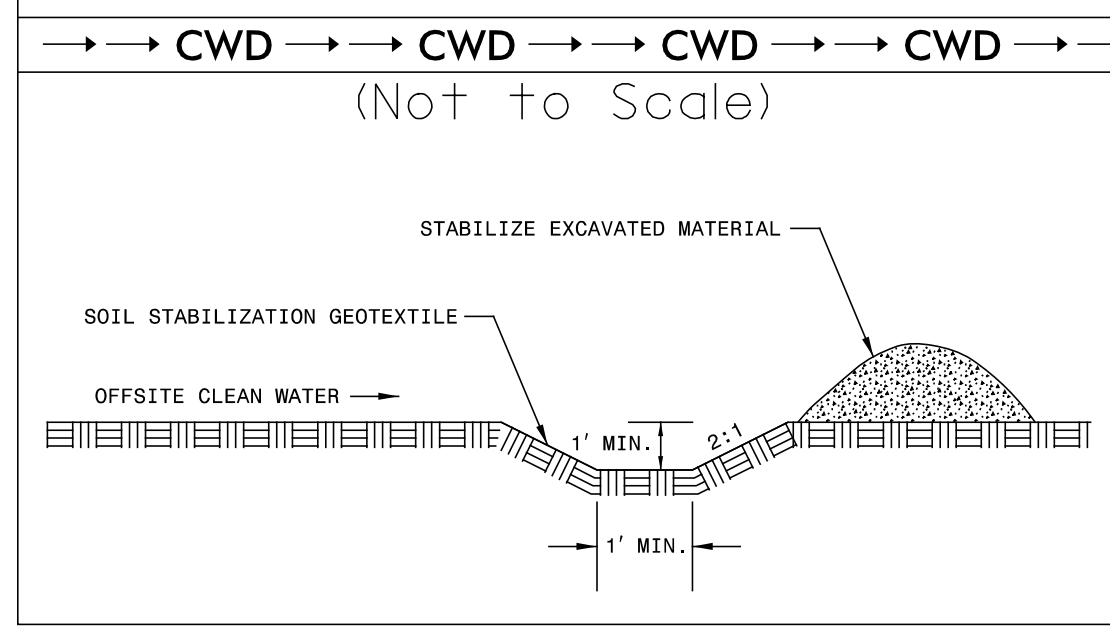

CLEARING AND GRUBBING
 EROSION CONTROL FOR
 CONSTRUCTION SHEET 7

9/10/2014 \\cadd\w5516_hyd_erosion_c&g_psh_07.dgn ICA ENGINEERING, INC