




CULVERT CONSTRUCTION SEQUENCE

STA. 20+52 -Y1REV-

1. INSTALL PROPOSED EROSION CONTROL MEASURES
2. INSTALL SPECIAL STILLING BASIN FOR PUMPED EFFLUENT (MIN. VOLUME = 23 CY)
3. INSTALL PUMP AND TEMPORARY FLEXIBLE PIPE
4. CONSTRUCT IMPERVIOUS DIKES
5. INSTALL PROPOSED PIPE AND PORTION OF INLET/OUTLET CHANNEL IMPROVEMENTS
6. REMOVE IMPERVIOUS DIKES AND DIVERT FLOW THROUGH PIPE
7. REMOVE PUMP AND TEMPORARY FLEXIBLE PIPE
8. CONSTRUCT REMAINDER OF INLET/OUTLET CHANNEL IMPROVEMENTS
9. REMOVE SPECIAL STILLING BASIN AND COMPLETE ROADWAY IMPROVEMENTS

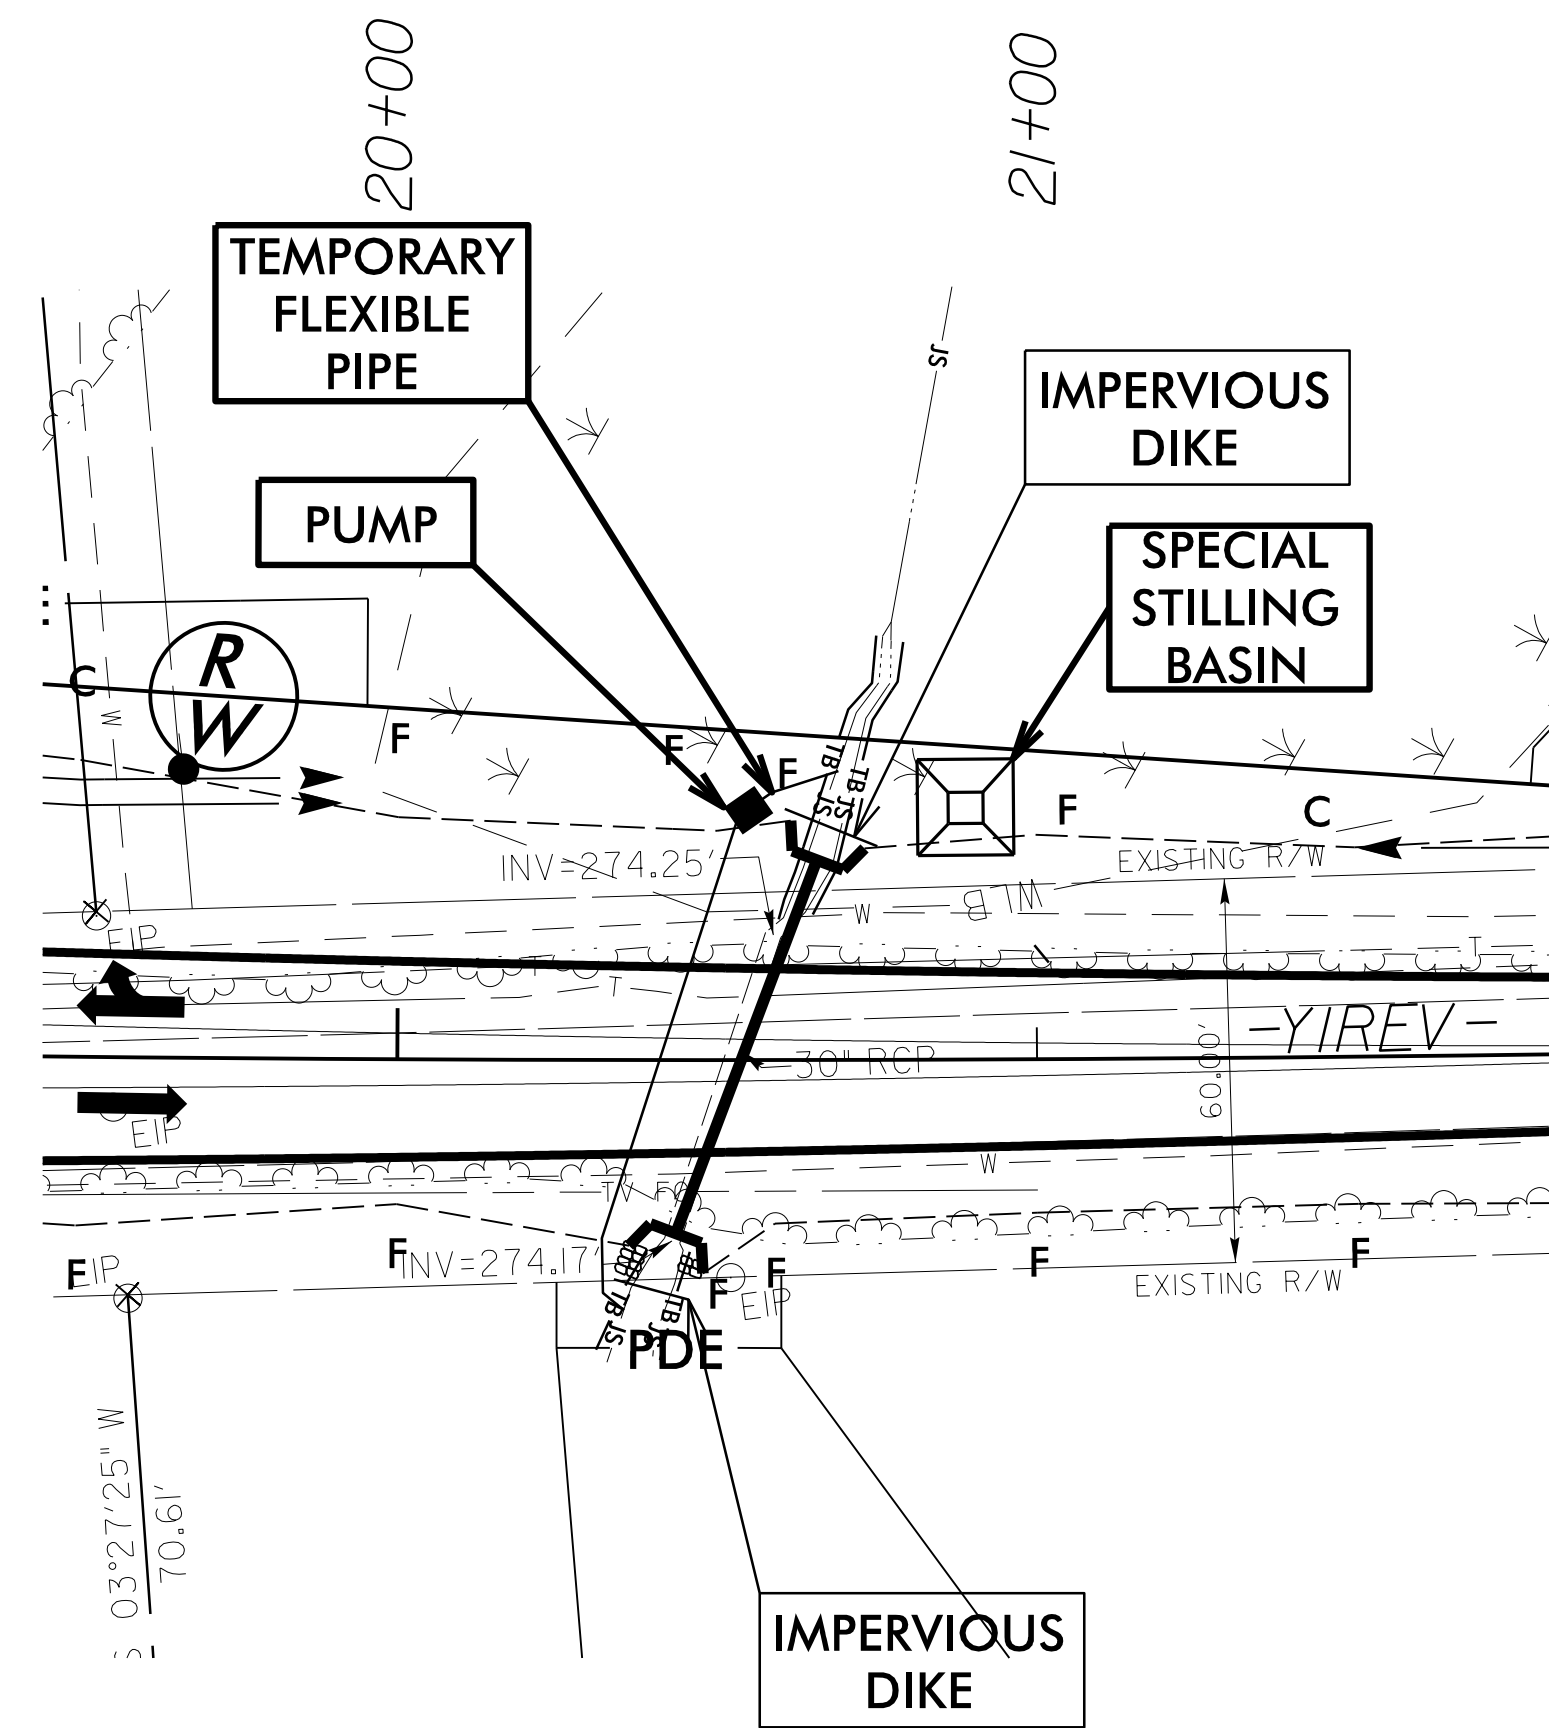

8/17/99

 REVISIONS

 \$\$\$\$SYTIME\$\$\$\$
 \$\$\$\$UNITS\$\$\$\$
 \$\$\$\$DRAWING\$\$\$\$
 \$\$\$\$DATE\$\$\$\$