PILE REPAIRS

BENT	PILE	TYPE	JACKET LENGTH EST. LF	JACKET LENGTH ACTUAL LF
262	1	2	11.5	
262	2	1	8	
262	3	1	8	
262	4	1	8	
262	5	1	8	
262	6	1	8	
263	3	1	9	
263	4	1	9	
263	5	1	9	
263	6	1	9	
264	1	1	9	
264	4	1	9	
264	2a	1	9	
264	2b	1	9	
264	3a	1	9	
264	3b	1	9	
265	1	1	9	
265	2	1	9.5	
265	3	1	9.5	
265	4	1	8	
265	5	1	9.5	
265	6	2	9.5	
266	1	1	8	
266	2	1	8.5	
266	3	1	8.5	
266	4	1	8.5	
266	5	1	8.5	
266	6	1	8.5	
267	2	1	7	
267	3	1	7	
267	5	1	8	
267	6	1	8	
268	2a	1	6.5	
268	2b	1	6.5	
268	3a	1	6.5	
268	3b	1	6.5	
269	1	1	6.5	
269	2	1	6.5	
269	3	1	6.5	
269	4	1	6.5	
269	5	1	6.5	
269	6	1	6.5	
270	1	1	5.5	
270	2	1	5.5	
270	3	1	5.5	

PILE REPAIRS

BENT	PILE	TYPE	JACKET LENGTH EST. LF	JACKET LENGTH ACTUAL LF
270	5	1	5.5	
270	6	1	5.5	
271	2	1	5	
271	5	1	5	
271	6	1	5	
272	4	1	5	
272	2a	1	4.5	
272	2b	1	4.5	
272	3b	1	4.5	

PILE REPAIRS

BENT	PILE	TYPE	JACKET LENGTH EST. LF	JACKET LENGTH ACTUAL LF

SUMMARY OF QUANTITIES

	QUANTITIES ESTIMATE	QUANTITIES ACTUAL
BENTS 262 - 274	LF	LF
TYPE 1	382	
TYPE 2	21	
TYPE 3	0	
TOTAL	403	

TYPE 1 REPAIR IS A CONCRETE PILE JACKET REPAIR.
TYPE 2 REPAIR IS REJACKETING A CONCRETE PILE.
TYPE 3 REPAIR IS REJACKETING A STEEL H-PILE.
SEE SHT S-390 & S-391 FOR PILE JACKET REPAIR DETAILS.
FOR PILE JACKETS, SEE SPECIAL PROVISIONS.

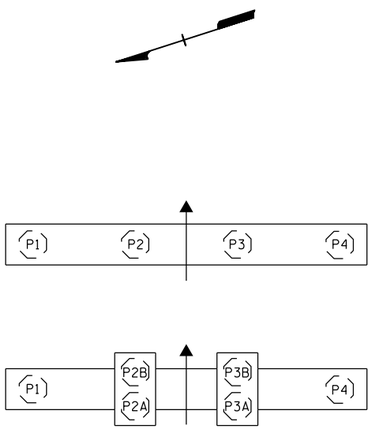

TYPICAL PILE NUMBERS

BENTS WITH MORE PILES FOLLOW SIMILAR PATTERN

PROJECT NO. B-5936

TYRRELL COUNTY

BRIDGE NO. 7

SHEET 7 OF 7

DocuSigned by:
Robbie Weisz
CEA153463B6D43D...

8/11/2016

NORTH CAROLINA PROFESSIONAL SEAL 039163 ENGINEER ROBBIE N. WEISZ

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH

PILE JACKET REPAIR TABLES

REVISIONS NO.	BY:	DATE:	NO.	BY:	DATE:
1			3		
2			4		

SHEET NO. S-389

TOTAL SHEETS 394

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

DRAWN BY : P.D. BRYANT DATE : 6/2016
CHECKED BY : R. WEISZ DATE : 6/2016

15-JUL-2016 16:04
R:\Structures\FINAL DGNS\400_xxx_B5936_SMU_S383-S389_TBL_Pile_Jackets.dgn
pbryant