

NOTE: PERIMETER EROSION CONTROL MEASURES SHALL BE INSTALLED DURING CLEARING AND GRUBBING PHASE.

NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B AND TEMPORARY ROCK SILT CHECKS TYPE - A AT DRAINAGE OUTLETS.

Construct Proposed Berm Ditch according to Detail 46 from -L- Sta. 159+00 LT to -L- Sta. 161+80 LT During the Clearing and Grubbing Phase

INSTALL INLET PROTECTION IN ACCORDANCE WITH ENGINEER'S RECOMMENDATIONS

37' x 27' x 3'
1.5 inch Skimmer
with 0.875 inch Orifice Diameter
4 ft. weir
ID 15.4

54' x 27' x 3'
1.5 inch Skimmer
with 1.125 inch Orifice Diameter
5 ft. weir
ID 15.2





32' x 16' x 3'
1.5 inch Skimmer
with 0.50 inch Orifice Diameter
4 ft. weir
ID 15.3

54' x 27' x 3'
1.5 inch Skimmer
with 1.125 inch Orifice Diameter
5 ft. weir
ID 15.1

CLEARING AND GRUBBING EROSION CONTROL FOR CONSTRUCTION SHEET 15

INSTALL PIPE(S) IN JURISDICTIONAL AREAS WITHOUT IMPACTING STREAM UNTIL AREA STABILIZED AND ACCORDING TO NCDOT BEST MANAGEMENT PRACTICES FOR CONSTRUCTION AND MAINTENANCE ACTIVITIES MANUAL.

Construct Proposed Berm Ditch according to Detail 74 from -L- Sta. 161+80 LT to -L- Sta. 164+00 LT During the Clearing and Grubbing Phase

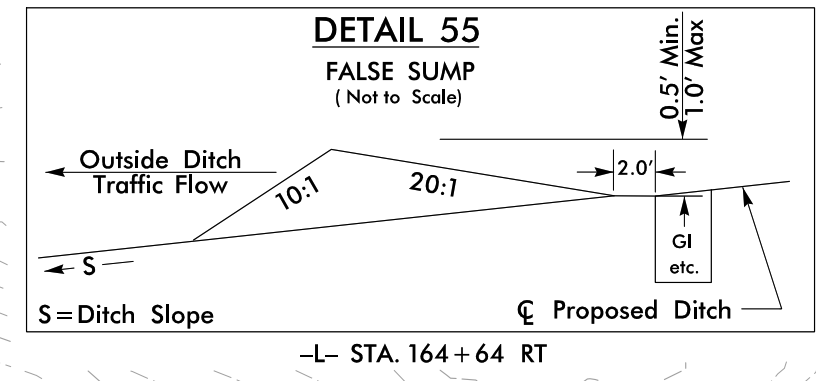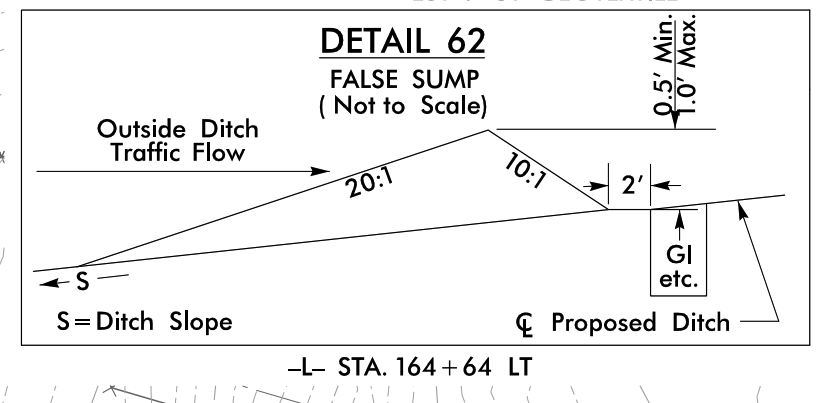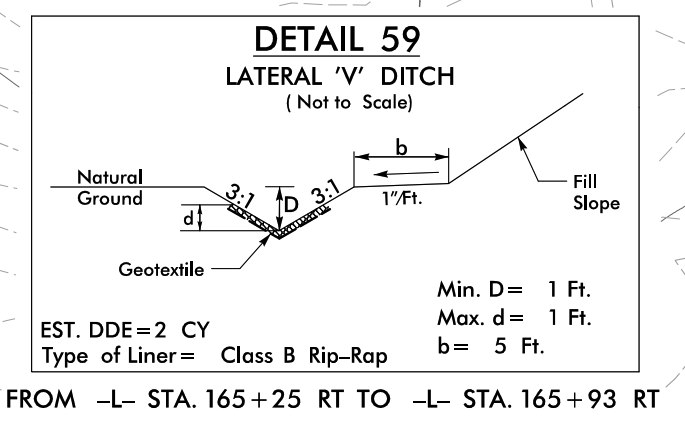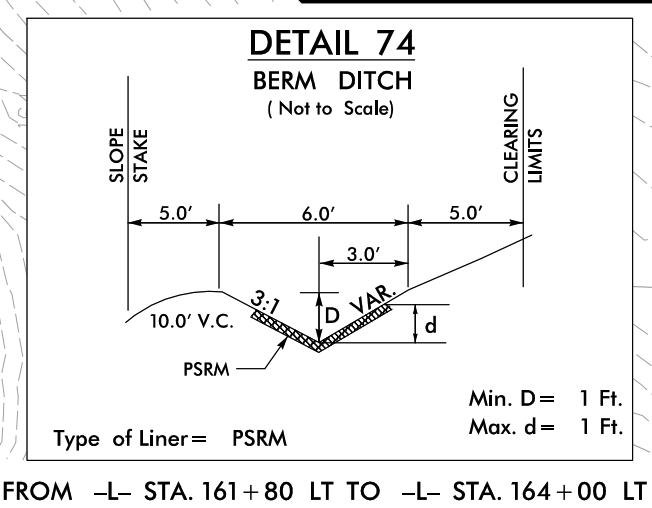

FOR -L- PROFILE SEE SHEET 29
FOR -DRI- PROFILE SEE SHEET 37

REVISIONS

MATCHLINE -L- STA. 153+00.00 SEE PLAN SHEET EC-14

MATCHLINE -L- STA. 166+00.00 SEE PLAN SHEET EC-16