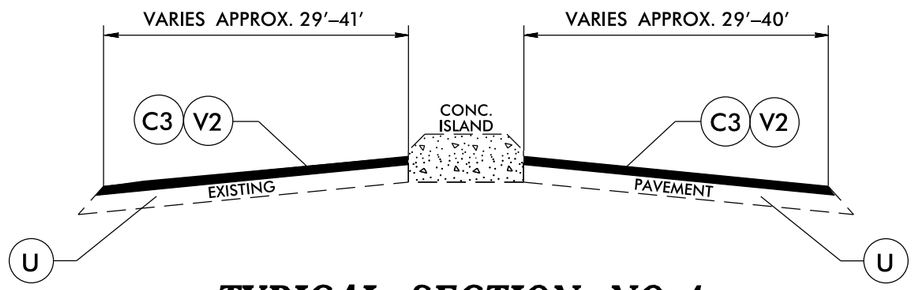

TYPICAL SECTION NO. 4

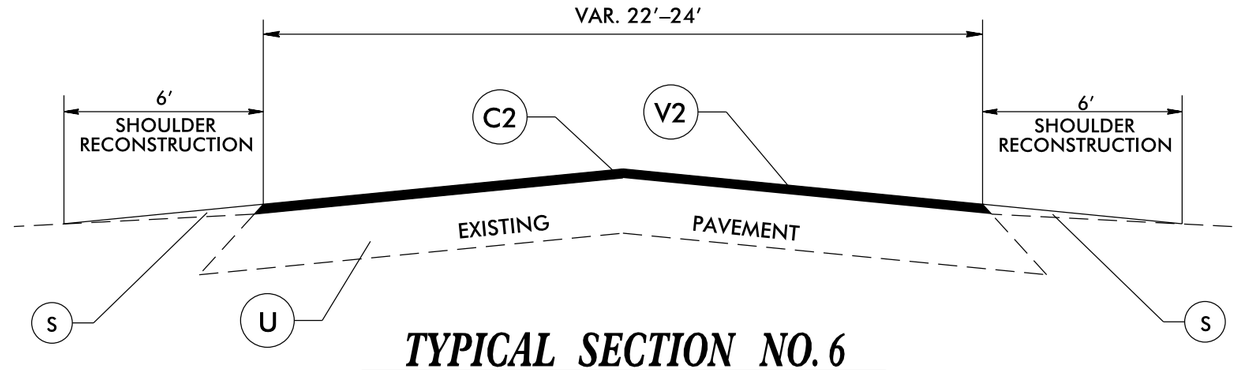

TYPICAL SECTION NO. 6

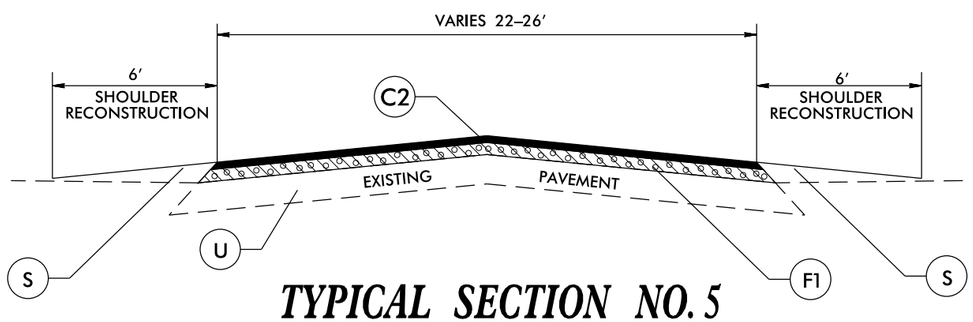

TYPICAL SECTION NO. 5

PAVEMENT SCHEDULE

C1	PROP. APPROX. 1.25" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 137.5 LBS. PER SQ. YD.
C2	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
C3	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
E1	PROP. APPROX. 5.0" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 570 LBS. PER SQ. YD.
F1	PROP. ASPHALT SURFACE TREATMENT, MAT COAT WITH #78 STONE
S	AGGREGATE SHOULDER BORROW
U	EXISTING PAVEMENT.
V1	MILLING 1.25" IN DEPTH
V2	MILLING 1.5" IN DEPTH
V3	TRENCHING FOR BASE COURSE (SEE S.P.)

09-DEC-2021 09:05
Resurfacing\Chatham_February2022_Submittal\Chatham_February2022_Maps_Typ.dgn
ATP DIVA-3036051