STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	R-5751	RW01	21

STATE OF NORTH CAROLINA
DIVISION OF HIGHWAYS

SURVEY CONTROL, EXISTING CENTERLINES, RIGHT OF WAY, EASEMENTS AND PROPERTY TIES

ROBESON COUNTY

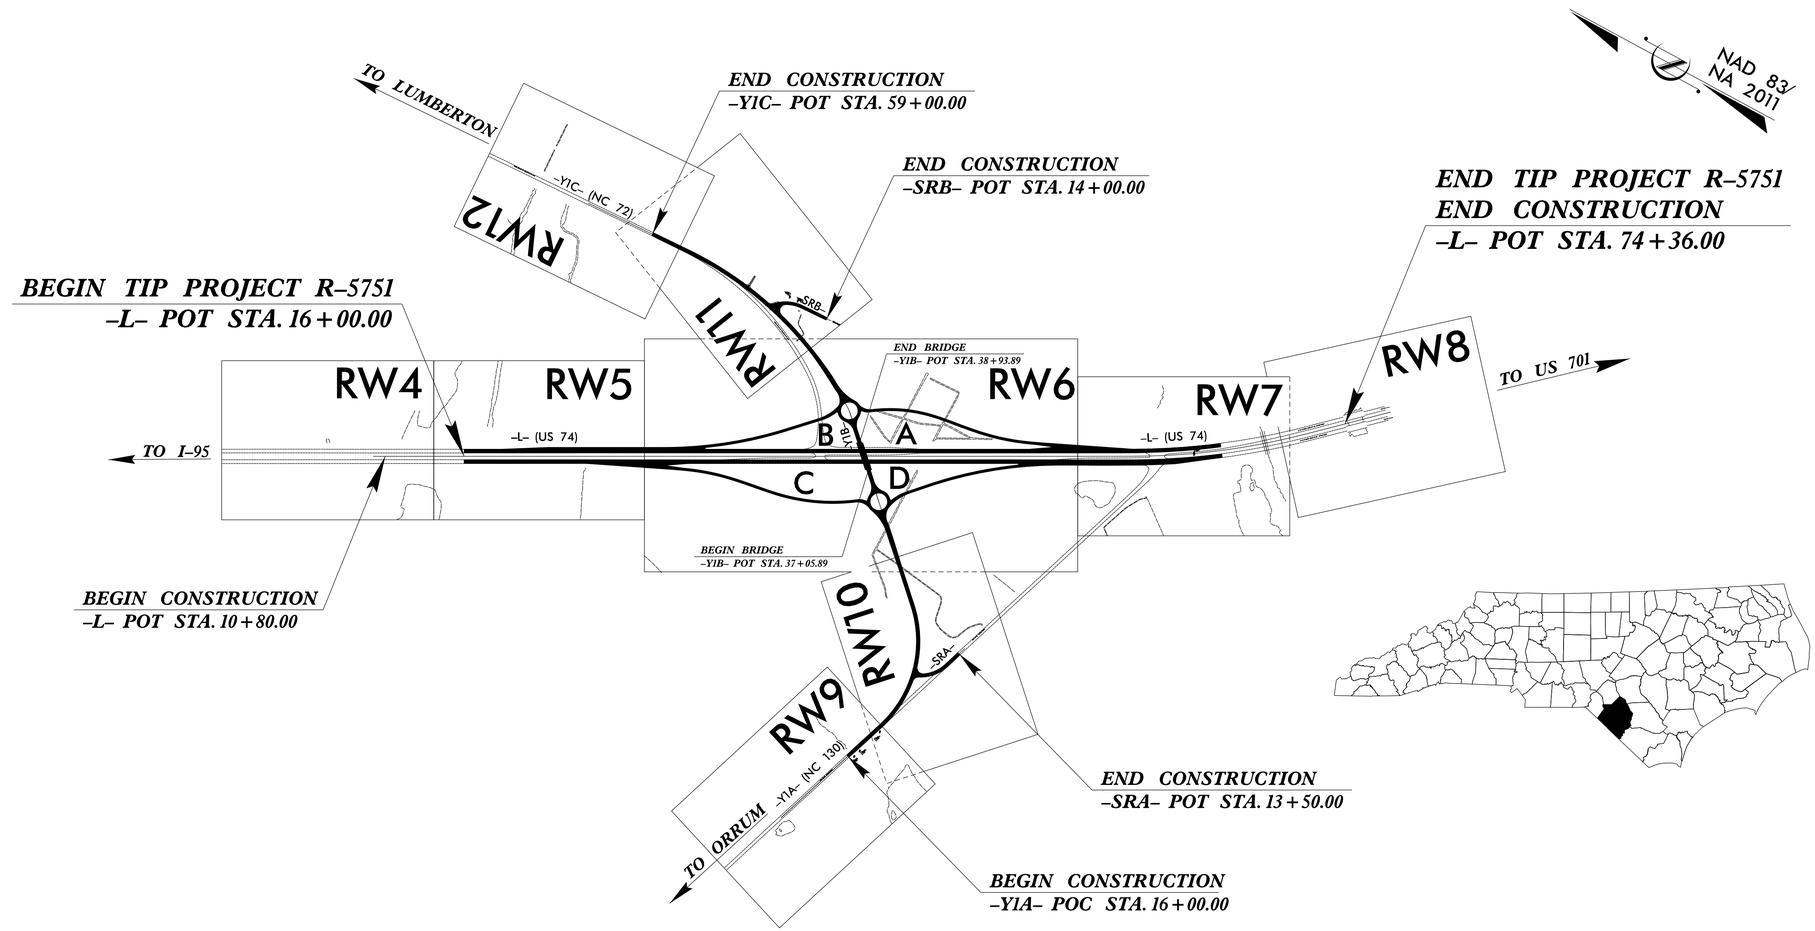

GRAPHIC SCALE

50 25 0 50 100

PLANS

DATUM DESCRIPTION

THE LOCALIZED COORDINATE SYSTEM DEVELOPED FOR THIS PROJECT
IS BASED ON THE STATE PLANE COORDINATES ESTABLISHED BY
NCDOT FOR MONUMENT "R-5797-4"
WITH NAD 83/NA 2011 STATE PLANE GRID COORDINATES OF
NORTHING: 252670.283(ft) EASTING: 2011601.474(ft)
ELEVATION: 83.899(ft)
THE AVERAGE COMBINED GRID FACTOR USED ON THIS PROJECT
(GROUND TO GRID) IS: 1.0000281960 (1/X: 0.9999718048)
THE N.C. LAMBERT GRID BEARING AND
LOCALIZED HORIZONTAL GROUND DISTANCE FROM
"R-5797-4" TO -L- STATION 10+00 IS
N 33-56'23.41" W 9036.91(ft)
ALL LINEAR DIMENSIONS ARE LOCALIZED HORIZONTAL DISTANCES
VERTICAL DATUM USED IS NAVD 88

Prepared in the Office of:

NCDOT DIVISION 6
LOCATION AND SURVEYS
4834 US HWY 301 S
HOPE MILLS, NC 28348

2018 STANDARD SPECIFICATIONS

RIGHT OF WAY DATE:	LETTING DATE:
06/23/2021	01/17/2023

PROFESSIONAL LAND SURVEYOR

NORTH CAROLINA PROFESSIONAL SEAL L-4169 LAND SURVEYOR KEITH E. HONEYCUTT

DocuSigned by: Keith E. Honeycutt 09/28/2022
BC11BDAEF1CADE...

SIGNATURE: Date:

STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION

TIP PROJECT: R-5751

09/08/99

28-SEP-2022 07:18
S:\Units\Div06\HOPE_MILLS_PROJECTS\Control Sheets\r5751\revision_220920\work\r5751ls_rw01.dgn
cmblackmon AT DIV06-312634