WBS ELEMENT	SHEET NO.
2024CPT.08.11.10761 2024CPT.08.11.20761 8.107611	10

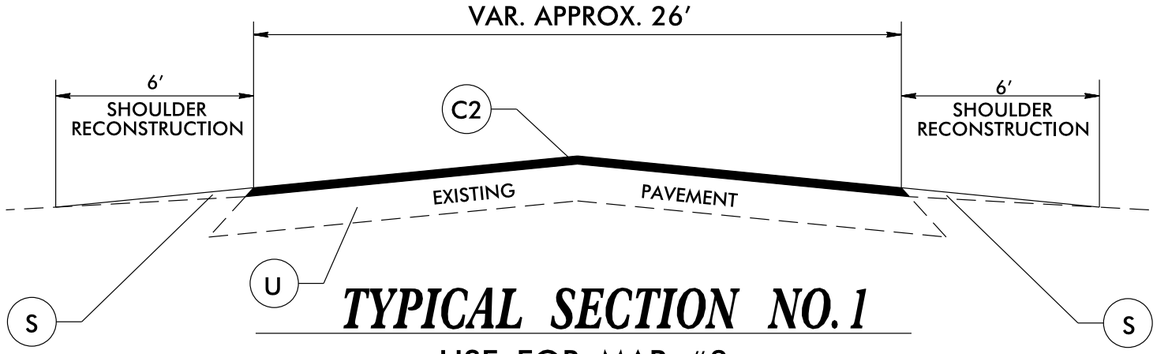

TYPICAL SECTION NO. 1

USE FOR MAP #3

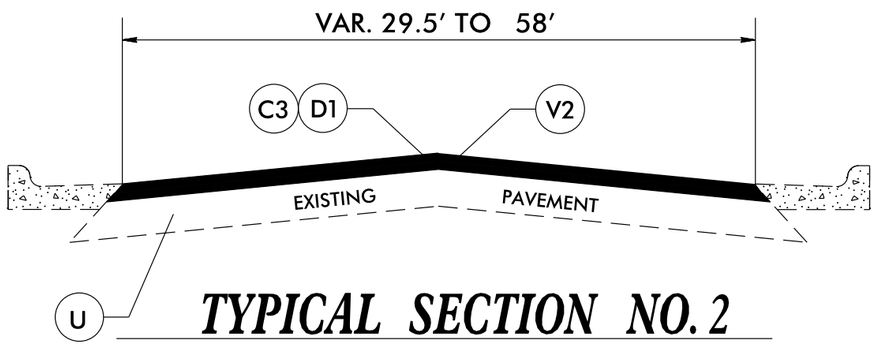

TYPICAL SECTION NO. 2

USE FOR MAP #1
USE FOR MAP #2

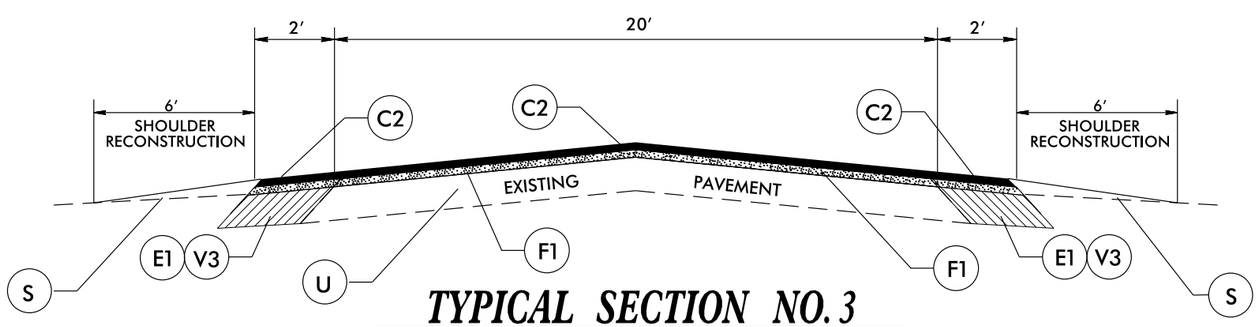

TYPICAL SECTION NO. 3

USE FOR MAP #4

PAVEMENT SCHEDULE

C1	PROP. APPROX. 1.5″ ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
C2	PROP. APPROX. 1.5″ ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C3	PROP. APPROX. 2″ ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
D1	PROP. APPROX. 3″ ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I–19.0C, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.
E1	PROP. APPROX. 5.5″ ASPHALT CONCRETE BASE COURSE, TYPE B–25.0C, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YD.
F1	PROP. ASPHALT SURFACE TREATMENT, MAT COAT #67 STONE
S	AGGREGATE SHOULDER BORROW
U	EXISTING PAVEMENT
V1	MILLING 1.5″ IN DEPTH
V2	MILLING 5″ IN DEPTH
V3	TRENCHING FOR BASE COURSE (SEE S.P.)

15-DEC-2023 17:00
surfacing\Randolph_February2024_Contract_1\Randolph_February2024_Maps_Typ1.dgn
settts
BY DIV08-13008dl