

ECONOLITE ASC/3-2070 OVERLAP PROGRAMMING DETAIL

(program controller as shown)

- From Main Menu select 2. CONTROLLER
- From CONTROLLER Submenu select 2. VEHICLE OVERLAPS

OVERLAP A

Select TMG VEH OVLP [A] and 'PPLT FYA'

```

TMG VEH OVLP...[A] TYPE: .....PPLT FYA
PROTECTED LEFT TURN.... PHASE 1
OPPOSING THROUGH..... PHASE 2

FLASHING ARROW OUTPUT.....CH9 ISOLATE
DELAY START OF: FYA..0.0 CLEARANCE..0.0
ACTION PLAN SF BIT DISABLE..... 1
  
```

← NOTICE ACTION PLAN SF BIT "1"

Toggle Twice

OVERLAP C

Select TMG VEH OVLP [C] and 'PPLT FYA'

```

TMG VEH OVLP...[C] TYPE: .....PPLT FYA
PROTECTED LEFT TURN.... PHASE 5
OPPOSING THROUGH..... PHASE 6

FLASHING ARROW OUTPUT.....CH11 ISOLATE
DELAY START OF: FYA..0.0 CLEARANCE..0.0
ACTION PLAN SF BIT DISABLE..... 5
  
```

← NOTICE ACTION PLAN SF BIT "5"

END PROGRAMMING

ECONOLITE ASC/3-2070 VEHICLE DETECTOR SETUP PROGRAMMING DETAIL FOR ALTERNATE PHASING

LOOPS 1A AND 5A

(program controller as shown)

IMPORTANT!

Program detectors per the input file connection and programming chart shown on sheet 1 before proceeding.

- From Main Menu select 8. UTILITIES
- From UTILITIES Submenu select 1. COPY/CLEAR
- Copy from DETECTOR PLAN "1" to DETECTOR PLAN "2".

```

COPY / CLEAR UTILITY
FROM          TO
PHASE TIMING... > PHASE TIMING...
TIMING PLAN... > TIMING PLAN...
PH DET OPT PLAN. > PH DET OPT PLAN.
DETECTOR PLAN... 1 > DETECTOR PLAN... 2
TOGGLE TO SELECT A "FROM" AND A "TO"
THEN PRESS ENTER
  
```

- From Main Menu select 6. DETECTORS
- From DETECTOR Submenu select 2. VEHICLE DETECTOR SETUP
- Place cursor in VEH DET PLAN [] position and enter "2".

- Place cursor in VEH DETECTOR [] position and enter "1".
- Set delay time to "3".

```

VEH DETECTOR [ 1]  VEH DET PLAN [ 2]
TYPE: N-NTCIP
TS2 DETECTOR..... ECPI LOG..... NO
DET PH - 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
1 1
CALL OPTION.... YES DELAY TIME... 3.0
EXT OPTION. PASSAGE EXTENSION TIME. 0.0
USE ADDED INITIAL . CROSS SWITCH PH.. 0
LOCK IN..... NONE NTCIP VOL . OR OCC .
PMT QUEUE DELAY- NO
  
```

← NOTICE VEH DET PLAN 2

← ENSURE DELAY IS SET TO '3'

- Place cursor in VEH DETECTOR [] position and enter "26".
- Set assigned phase to "0".

```

VEH DETECTOR [26]  VEH DET PLAN [ 2]
TYPE: G-GREEN EXTENSION/DELAY
TS2 DETECTOR..... ECPI LOG..... NO
DET PH - 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
26 0
EXTEND TIME... 0.0 DELAY TIME... 3.0
USE ADDED INITIAL . CROSS SWITCH PH.. 0
LOCK IN..... NONE NTCIP VOL . OR OCC .
PMT QUEUE DELAY. NO
  
```

← NOTICE VEH DET PLAN 2

← ENSURE PHASE IS SET TO "0"

- Place cursor in VEH DETECTOR [] position and enter "5".
- Set delay time to "3".

```

VEH DETECTOR [ 5]  VEH DET PLAN [ 2]
TYPE: N-NTCIP
TS2 DETECTOR..... ECPI LOG..... NO
DET PH - 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
5 5
CALL OPTION.... YES DELAY TIME... 3.0
EXT OPTION. PASSAGE EXTENSION TIME. 0.0
USE ADDED INITIAL . CROSS SWITCH PH.. 0
LOCK IN..... NONE NTCIP VOL . OR OCC .
PMT QUEUE DELAY- NO
  
```

← NOTICE VEH DET PLAN 2

← ENSURE DELAY IS SET TO '3'

- Place cursor in VEH DETECTOR [] position and enter "22".
- Set assigned phase to "0".

```

VEH DETECTOR [22]  VEH DET PLAN [ 2]
TYPE: G-GREEN EXTENSION/DELAY
TS2 DETECTOR..... ECPI LOG..... NO
DET PH - 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
22 0
EXTEND TIME... 0.0 DELAY TIME... 3.0
USE ADDED INITIAL . CROSS SWITCH PH.. 0
LOCK IN..... NONE NTCIP VOL . OR OCC .
PMT QUEUE DELAY. NO
  
```

← NOTICE VEH DET PLAN 2


← ENSURE PHASE IS SET TO "0"

END PROGRAMMING

THIS ELECTRICAL DETAIL IS FOR
THE SIGNAL DESIGN: 07-1306T1
DESIGNED: January 2025
SEALED: 03-14-2025
REVISED: N/A

13-MAR-2025 15:15 PW:///SUD0036433_worh.ris-com:ATKMANCO1/Documents/Roads and Bridges/Projects/100059632_JSSR_S19_and ITS/Task 05_11_Signals/071306T1_sma.le_2023mcd.dgn ST14689 - AT 10591089

Electrical Detail - Sheet 2 of 4 Temporary Design 1

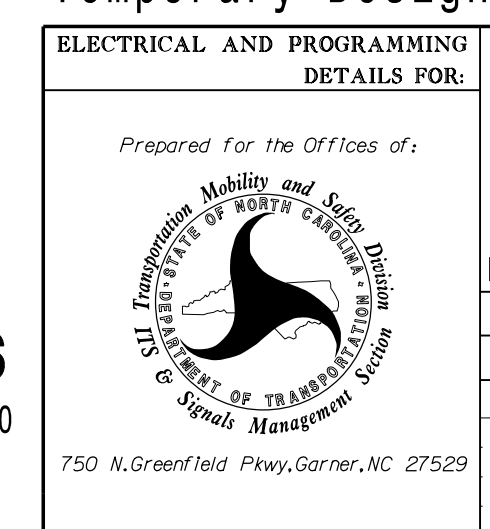

ELECTRICAL AND PROGRAMMING DETAILS FOR:		SR 1850 (Sandy Ridge Road) at SR 1818 (Johnson Street)/Bloomfield Trail	
Prepared for the Offices of:		Division 7 Guilford County High Point	
PLAN DATE: January 2025	REVIEWED BY: AM Encarnacion	PREPARED BY: JT Stiff	REVIEWED BY: PL Alexander
REVISIONS	INIT.	DATE	

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SEAL
ANTHONY M. ENCARNACION
PROFESSIONAL ENGINEER
STATE OF NORTH CAROLINA
SEAL 044476

Anthony Encarnacion
SIGNATURE DATE 3/14/2025

SIG. INVENTORY NO. 07-1306T1