Docusign Envelope ID: F048F0D8-E039-406A-8A46-44D17900C958

-SIDEPATH- ALIGNMENT DETAIL

PROJECT REFERENCE NO.	SHEET NO.
HL-0025	2B-2
R/W SHEET NO.	

ROADWAY DESIGN ENGINEER

NORTH CAROLINA PROFESSIONAL SEAL 030740 ENGINEER STEVEN MATHEW KARNIS

Signed by: Steve Karnis 12/17/2025

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

NAD 83/2011

-L-

PI Sta 17+13.57
△ = 23° 13′ 14.4″ (LT)
D = 3° 53′ 04.1″
L = 597.78′
T = 303.05′
R = 1,475.00′

-SIDEPATH-

PI Sta 20+47.10
△ = 12° 31′ 49.0″ (RT)
D = 9° 32′ 57.5″
L = 131.22′
T = 65.87′
R = 600.00′

PI Sta 21+48.69
△ = 8° 17′ 31.9″ (LT)
D = 11° 27′ 33.0″
L = 72.36′
T = 36.24′
R = 500.00′

PI Sta 22+96.64
△ = 6° 07′ 41.1″ (LT)
D = 19° 05′ 54.9″
L = 32.09′
T = 16.06′
R = 300.00′

PI Sta 23+34.08
△ = 6° 07′ 41.1″ (RT)
D = 14° 19′ 26.2″
L = 42.78′
T = 21.41′
R = 400.00′

PI Sta 25+43.52
△ = 32° 23′ 36.4″ (RT)
D = 76° 23′ 39.7″
L = 42.40′
T = 21.78′
R = 75.00′

PI Sta 25+92.24
△ = 70° 09′ 44.8″ (LT)
D = 143° 14′ 22.0″
L = 48.98′
T = 28.09′
R = 40.00′

PI Sta 26+39.43
△ = 29° 28′ 12.6″ (RT)
D = 57° 17′ 44.8″
L = 51.44′
T = 26.30′
R = 100.00′

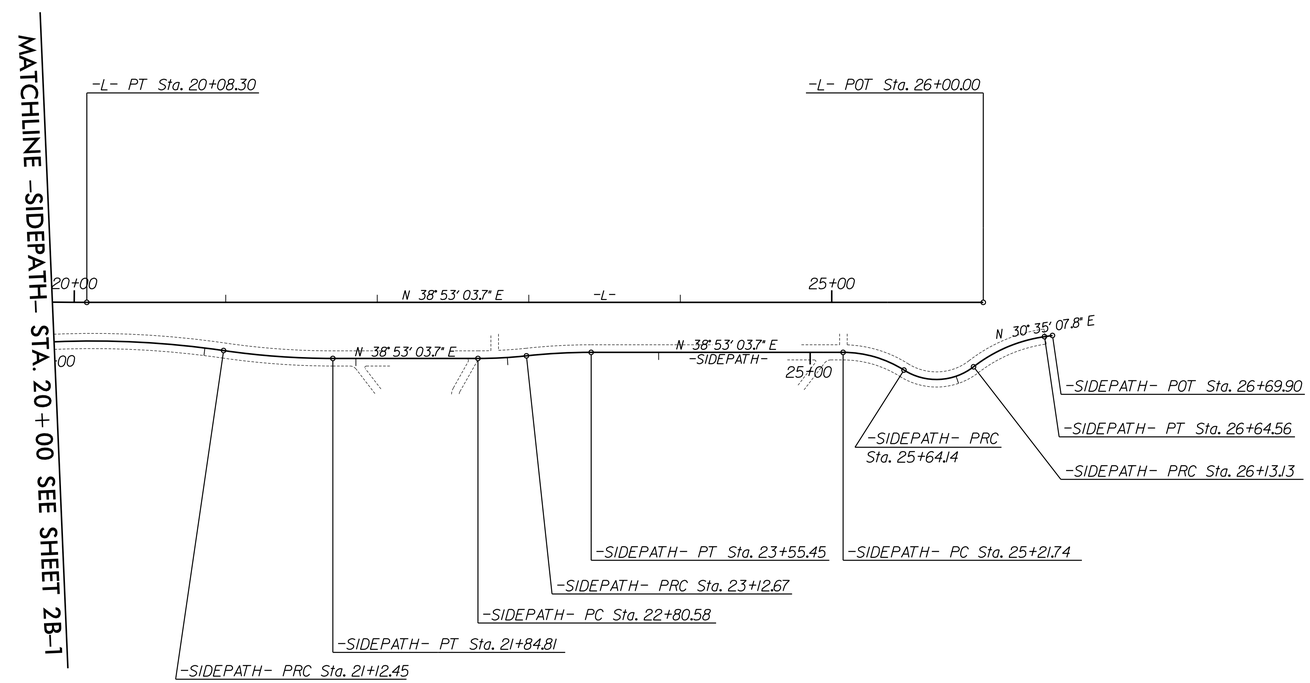

FOR -SIDEPATH- PLAN SEE SHEETS 4 & 5.
FOR -SIDEPATH- PROFILE SEE SHEET 8.

AMT
A. MORTON THOMAS AND ASSOCIATES, INC.
10735 DAVID TAYLOR DRIVE, SUITE 310 • CHARLOTTE, NC 28262
(704) 595-9975 • NC LICENSE NO. F-1049
WWW.AMTENGINEERING.COM

8/17/99
10/31/2025
X:\Raleigh\17-1112.013 - HL-0025 - Greylock Ridge Rd Ext\05-CAD\Greylock_Ridge_Ext\Roadway\Proj\Greylock_Rdy_psh02B-2_SidePath.dgn
dmorgan