


1 @ 8' x 8' RCBC CULVERT CONSTRUCTION SEQUENCE

MAD 83/NA 2011

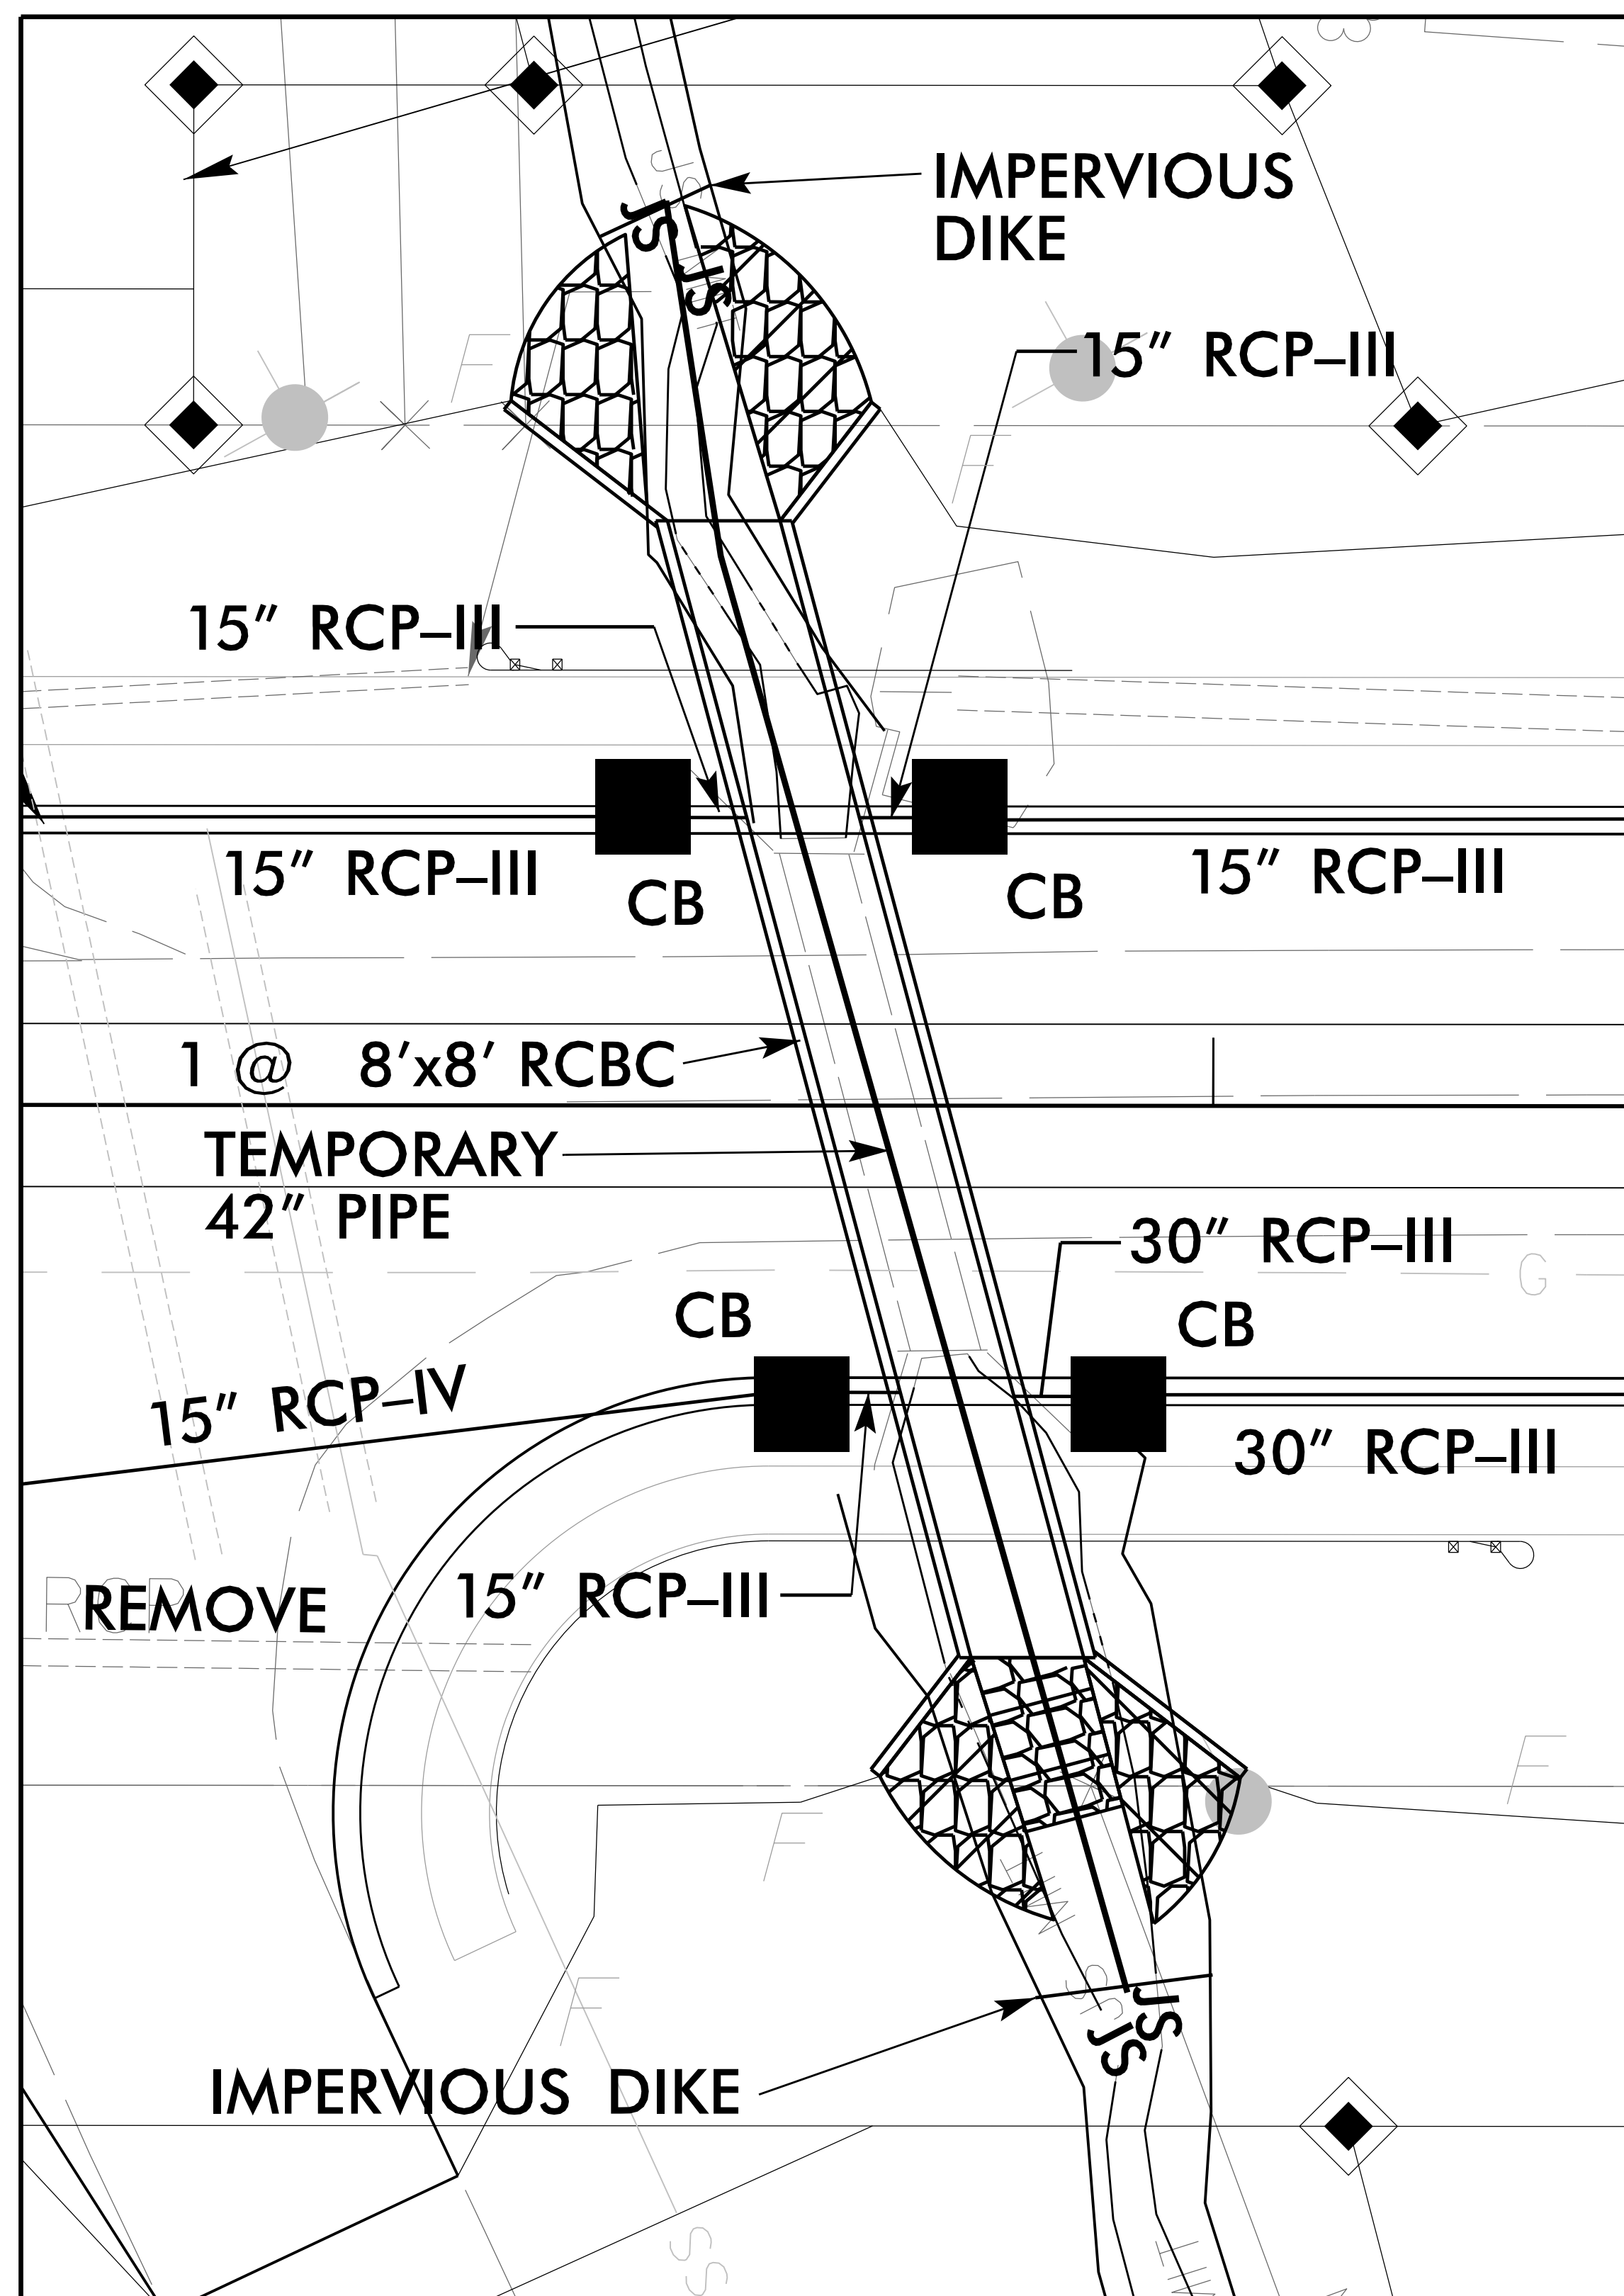

CULVERT PHASING

PHASE 1

- 1.) INSTALL ALL TEMPORARY SEDIMENT CONTROL DEVICES NECESSARY FOR CULVERT CONSTRUCTION.
- 2.) INSTALL SPECIAL STILLING BASIN WITHIN PROJECT RIGHT-OF-WAY. PUMP ALL EFFLUENT INTO SPECIAL STILLING BASIN.
- 3.) INSTALL IMPERVIOUS DIKES AND INSTALL 42" TEMP. PIPE.
- 4.) DE-WATER EFFLUENT FROM WORK SITE INTO SPECIAL STILLING BASIN.
- 5.) CONSTRUCT PROPOSED 1 @ 8'x8' RCBC CHANNEL IMPROVEMENTS.

PHASE 2

- 6.) REMOVE TEMPORARY IMPERVIOUS DIKES AND TEMPORARY PIPE TO ALLOW FLOW THROUGH NEWLY CONSTRUCTED CULVERT.
- 7.) UPON STABILIZATION OF ALL DISTURBED AREAS, REMOVE ALL TEMPORARY SEDIMENT CONTROL DEVICES.
- 8.) REMOVE ANY REMAINING SPECIAL STILLING BASIN(S) AND COMPLETE ROADWAY CONSTRUCTION.

REVISIONS