09/08/99

TIP PROJECT: U-4714AC


CONTRACT:

STATE OF NORTH CAROLINA
DIVISION OF HIGHWAYS

UTILITIES BY OTHERS PLANS
MECKLENBURG & UNION COUNTY

T.I.P. NO.	SHEET NO.
U-4714AC	UO-1

NOTE:
ALL UTILITY WORK SHOWN ON THIS SHEET WILL BE DONE BY OTHERS.
NO PAYMENT WILL BE MADE TO THE CONTRACTOR FOR UTILITY WORK SHOWN ON THIS SHEET.

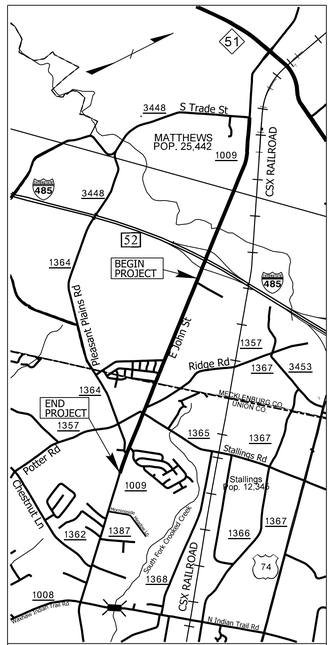

VICINITY MAP

LOCATION: SR 1009 (JOHN STREET\OLD MONROE ROAD)
FROM EAST OF I-485 INTERCHANGE TO
WEST OF MORNINGSIDE MEADOW LANE

TYPE OF WORK: RELOCATION OF AERIAL & BURIED COMMUNICATION FACILITIES, AERIAL POWER FACILITIES, & BURIED GAS FACILITIES

LEGEND

★ PROPOSED SIGNAL

★ EXISTING SIGNAL

TO NC

GRAPHIC SCALES

50 25 0 50 100
PLANS

50 25 0 50 100
PROFILE (HORIZONTAL)

10 5 0 10 20
PROFILE (VERTICAL)

INDEX OF SHEETS

SHEET NO.:	DESCRIPTION:
UO-1	TITLE SHEET
UO-1A	SYMBOLOGY SHEET
UO-02 THRU UO-11	UBO PLAN SHEETS

UTILITY OWNERS WITH CONFLICTS

(A) POWER – DUKE ENERGY
(B) GAS – PIEDMONT NATURAL GAS
(C) COMMUNICATION – AT&T
(D) COMMUNICATION – MCNC
(E) COMMUNICATION – WINDSTREAM
(F) COMMUNICATION – CHARTER
(G) COMMUNICATION – LUMEN
(H) COMMUNICATION – SEGRA
(I) COMMUNICATION – MCI/VERIZON

PREPARED IN THE OFFICE OF:

KCI
http://www.kci.com

KCI Associates of N.C., P.A.
4800 Falls of Neuse Road, Suite 200
Raleigh, NC 27609
Phone (919) 783-9214
NC Firm License No: C-0764

JOHN FAISON – PROJECT UTILITY COORDINATOR
DANIEL ALLEN – PROJECT UTILITY DESIGNER

DIVISION OF HIGHWAYS
UTILITIES UNIT
1555 MAIL SERVICES CENTER
RALEIGH NC 27699-1555
PHONE (919) 707-6690
FAX (919) 250-4151

DONALD HAMPTON – WESTERN UTILITIES MANAGER
DAYTON MARTIN – REGIONAL UTILITY COORDINATOR
JONG T YOON, PE – SENIOR UTILITIES ENGINEER

25-AUG-2026 15:54
M:\2017\24170482.03 U-4714A\Utilities\U-4714AC Ub0s\290_001_U4714AC_UT_U001_TSH.dgn
$$$$USERNAME$$$$

DocuSign Envelope ID: 3CA268E6-4630-4FD1-81D1-781383170F4A

9/16/2021

PROJECT REFERENCE NO.	SHEET NO.
U-4714AC	U0-1A

STATE OF NORTH CAROLINA
DIVISION OF HIGHWAYS

UTILITIES PLAN SHEET SYMBOLS

PROPOSED WATER SYMBOLS

- Water Line (Sized as Shown) — 12" WL
- 11¼ Degree Bend
- 22½ Degree Bend
- 45 Degree Bend
- 90 Degree Bend
- Plug
- Tee
- Cross
- Reducer
- Gate Valve — GV
- Butterfly Valve — BV
- Tapping Valve — TGV
- Line Stop — LS
- Line Stop with Bypass — LS/BP
- Blow Off — BO
- Fire Hydrant — PFH
- Relocate Fire Hydrant — RFH
- Remove Fire Hydrant — REM FH
- Water Meter — PWM
- Relocate Water Meter — RWM
- Remove Water Meter — REM WM
- Water Pump Station — PSTW
- RPZ Backflow Preventer — PRPZ
- DCV Backflow Preventer — PREP
- Relocate RPZ Backflow Preventer — RRPZ
- Relocate DCV Backflow Preventer — RREP

PROPOSED SEWER SYMBOLS

- Gravity Sewer Line (Sized as Shown) — 12" SS
- Force Main Sewer Line (Sized as Shown) — 12" FSS
- Manhole (Sized per Note)
- Sewer Pump Station — PSTSS

PROPOSED MISCELLANOUS UTILITIES SYMBOLS

- Power Pole
- Telephone Pole
- Joint Use Pole
- Telephone Pedestal — TEL PED
- Utility Line by Others (Type as Shown) — PROP O/H POW LINES
- Trenchless Installation — 12" TL INSTALL
- Encasement by Open Cut — 24" ENCAS BY OC
- Encasement — 24" ENCASEMENT

- Thrust Block
- Air Release Valve — AR
- Utility Vault — UV
- Concrete Pier — CP
- Steel Pier — SP
- Plan Note — NOTE
- Pay Item Note — PAY ITEM

EXISTING UTILITIES SYMBOLS

- Power Pole
- Telephone Pole
- Joint Use Pole
- Utility Pole
- Utility Pole with Base
- H-Frame Pole
- Power Transmission Line Tower
- Water Manhole
- Power Manhole
- Telephone Manhole
- Sanitary Sewer Manhole
- Hand Hole for Cable
- Power Transformer
- Telephone Pedestal
- CATV Pedestal
- Gas Valve
- Gas Meter
- Located Miscellaneous Utility Object
- Abandoned According to Utility Records — AATUR
- End of Information — E.O.I.

- *Underground Power Line — P
- *Underground Telephone Cable — T
- *Underground Telephone Conduit — TC
- *Underground Fiber Optics Telephone Cable — T FO
- *Underground TV Cable — TV
- *Underground Fiber Optics TV Cable — TV FO
- *Underground Gas Pipeline — G
- Aboveground Gas Pipeline — A/G Gas
- *Underground Water Line — W
- Aboveground Water Line — A/G Water
- *Underground Gravity Sanitary Sewer Line — SS
- Aboveground Gravity Sanitary Sewer Line — A/G Sanitary Sewer
- *Underground SS Forced Main Line — FSS
- Underground Unknown Utility Line — ?UTL
- SUE Test Hole
- Water Meter
- Water Valve
- Fire Hydrant
- Sanitary Sewer Cleanout

*For Existing Utilities

- Utility Line Drawn from Record (Type as Shown) — W
- Designated Utility Line (Type as Shown) — W

REV: 2/1/2012

PROJECT REFERENCE NO.	SHEET NO.
U-4714AC	UO-02

UTILITIES BY OTHERS

NOTE:
ALL PROPOSED UTILITY WORK SHOWN ON THIS SHEET WILL BE DONE BY OTHERS. NO PAYMENT WILL BE MADE TO THE CONTRACTOR FOR PROPOSED UTILITY WORK SHOWN ON THIS SHEET.

MCI/VERIZON 432ct FOC
BURIED LINE & HANDHOLES

-L- PT Sta. 84+50.70

MATCHLINE -L- 94+00.00
SEE SHEET UO-03

8/17/18
26 AUG 2026 2:40
U:\Projects\2017\2017182.03 U-4714A\Utilities\U-4714AC_UtOs\290.002_U4714AC_UT_RDY4_U002_PSHT.DGN
$$$$USERNAME$$$$

8/17/99

PROJECT REFERENCE NO.	SHEET NO.
U-4714AC	UO-03

UTILITIES BY OTHERS

NOTE:
ALL PROPOSED UTILITY WORK SHOWN ON THIS SHEET WILL BE DONE BY OTHERS. NO PAYMENT WILL BE MADE TO THE CONTRACTOR FOR PROPOSED UTILITY WORK SHOWN ON THIS SHEET.

NAD 83NA 2011

LESTER AND MARY YANDLE, LLC

ASPEN ASSET GROUP LLC

MATCHLINE –L– 94+00.00
SEE SHEET UO-02

MATCHLINE –L– 108+00.00
SEE SHEET UO-04

BEGIN CONSTRUCTION
–L– Sta. 95+66.96

–L– PC Sta. 95+41.34

–L– PRC Sta. 100+20.16

–L– PT Sta. 105+11.09
BEARING AH = S 32° 52' 08.0" E

GRADE TO TIE (FUTURE)
–L– OS 115' +/–

END CONST.
MATCH I-5507

END CONST
MATCH I-5507 R=430'

100' OUTSIDE LT EOT TAPER

5' CONC. SIDEWALK

10' MULTI-USE PATH

MONO. ISLAND

MONO. ISLAND 2

630' LANE AND MEDIAN TAPER

443' TAPER

FLOWABLE FILL

2'–6" C&G

2'–9" C&G

15" RCP–IV

16' DR

18" w/ELBOWS

GREU TL-3

CAT-1

PNG 4" MDPE END CAP

DUKE ENERGY, LUMEN, SEGRA, AT&T, CHARTER, & WINDSTREAM JOINT-USE LINES

SEGRA BURIED COMM LINE & HANDHOLE

MCNC HANDHOLE

MCI/VERIZON 432CT FIBER AT 5' MINIMUM & HANDHOLE

MCNC (3)1.25" INNERDUCTS.

LESTER AND MARY YANDLE, LLC

EDWIN LAWRENCE TENHENGEL

BEGIN PROJECT U–4714AC
–L– STA. 96+20.00 =
END PROJECT I–5507
–Y6– STA. 108+79.49, OS = 5.27' RT

26-AUG-2026 20:52
U-4714AC_UO_02_03 U-4714A\Utilities\U-4714AC_UO_02_03_U4714AC_UT_RDY5_U003_PSH.DGN
$$$$USERNAME$$$$

PROJECT REFERENCE NO.	SHEET NO.
U-4714AC	UO-04

UTILITIES BY OTHERS

NOTE:
ALL PROPOSED UTILITY WORK SHOWN ON THIS SHEET WILL BE DONE BY OTHERS. NO PAYMENT WILL BE MADE TO THE CONTRACTOR FOR PROPOSED UTILITY WORK SHOWN ON THIS SHEET.

NAD 83/NA 2011

MATCHLINE –L– 108+00.00
SEE SHEET UO-03

MATCHLINE –L– 122+00.00
SEE SHEET UO-05

89
ASPEN ASSETT GROUP LLC

86
J & M INVESTMENTS LLC

85
FOUR MORE INVESTMENTS LLC

87
DUKE POWER CO.

CHARLESTON VENTURE LLC

FOUR MORE INVESTMENTS LLC

JEFFREY WAYNE SPARKS
AND RICHARD ALAN SPARKS

–L– PRC Sta. 117+10.14

PC Sta. 111+34.50

TRENCHED INSTALLATION
60" WELDED STEEL
(74 LF)

TRENCHLESS INSTALLATION
60" WELDED STEEL
(110 LF)

S 32° 52' 08.0" E

SR 1009 E JOHN ST 25' RST

ROWAN LN

CL 'B' RIPRAP
EST. 2 TONS
EST. 7 SY GF

MCI/VERIZON 432CT FIBER
AT 5' MINIMUM & HANDHOLE

DUKE ENERGY, LUMEN, SEGRA,
AT&T, CHARTER, & WINDSTREAM
JOINT-USE LINES

BURIED WINDSTREAM COMM LINE.

MCNC (3)1.25" INNERDUCTS.

DUKE ENERGY EMPTY CONDUIT

NOTE:
ADDITIONAL EASEMENT NEEDS FOR DUKE DISTRIBUTION FACILITIES TO BE INDEPENDENTLY COORDINATED WITH DUKE TRANSMISSION ON DUKE POWER COMPANY PARCELS.

27-AUG-2026 08:46
M:\2017\2017107\03 U-4714\Utilities\U-4714AC UOs\290_004_U4714AC_UT_RDY6_UO04_PSH.DGN
$$$$USERNAME$$$$

290_004_U4714AC_UT_RDY6_UO04_PSH.DGN Default 8/27/2026 8:46:32 AM

PROJECT REFERENCE NO.	SHEET NO.
U-4714AC	UO-05

UTILITIES BY OTHERS

NOTE:
ALL PROPOSED UTILITY WORK SHOWN ON THIS SHEET WILL BE DONE BY OTHERS. NO PAYMENT WILL BE MADE TO THE CONTRACTOR FOR PROPOSED UTILITY WORK SHOWN ON THIS SHEET.

NAD 83/NA 2011

MATCHLINE -L- 122+00.00
SEE SHEET UO-04

MATCHLINE -L- 136+00.00
SEE SHEET UO-06

WINDSTREAM BURIED LINES TIEDINTO POLE

MCI/VERIZON 432 CT FIBER AT 5' MINIMUM & HANDHOLE.

DUKE ENERGY, LUMEN, SEGRA, AT&T, CHARTER, & WINDSTREAM JOINT USE LINES.

NOTE:
ADDITIONAL EASEMENT NEEDS FOR DUKE DISTRIBUTION FACILITIES TO BE INDEPENDENTLY COORDINATED WITH DUKE TRANSMISSION ON DUKE POWER COMPANY PARCELS.

MCI/VERIZON 432ct FOC BURIED LINE AT MINIMUM 5'

MCNC (3)1.25" INNERDUCTS & HANDHOLES.

PNG 6" PL GAS MAIN

PNG 4" PL GAS MAIN

BEGIN CONSTRUCTION
-Y25- POT Sta.21+00.00

END CONSTRUCTION
-DR3- POT Sta.10+90.00

END GRADE
-Y25- POT Sta.26+40.00

END CONSTRUCTION
-Y25- POT Sta.26+66.90
(TIE TO PROJECT U-4713A)

87 DUKE POWER CO 4147 - 921

87 DUKE POWER CO 4147 - 915

91 INDIAN TRAIL PLAZA

92 TROTTER PROPERTIES LLC

93 HAWTHORNE'S HOLDING GROUP LLC

95 MARCELLA MCINTYRE WITHROW

96 MARCELLA MCINTYRE WITHROW

97 CYNTHIA SEWELL GARDNER

97A MARCELLA MCINTYRE WITHROW

98 2217 EAST JOHN ST LLC

99 2217 EAST JOHN ST LLC

171 MARCELLA MCINTYRE WITHROW

SR 1009 E JOHN ST 24' BST

SR 1452 MCKEE RD 44' BST

-Y25-

Metal Pole #1
Std. Case #S30L1
-L- Sta. 127+24±
RT 73'±

Metal Pole #2
Std. Case #S30L1
-L- Sta. 127+24±
LT/RT 0'±

Metal Pole #1
Custom 40' Pole
-L- Sta. 131+80±
RT 95'±

Metal Pole #2
Std. Case #S35H1
-L- Sta. 131+76±
LT 79'±

Metal Pole #3
Std. Case #S35H1
-L- Sta. 132+87±
LT 98'±

Metal Pole #4
Custom 40' Pole C
-L- Sta. 133+10±
LRT 99'±

REMOVE 3'x3' RCBC

FLOWABLE FILL

REMOVE

31-AUG-2026 14:53
M:\2017\2170148.03 U-4714A\Utilities\U-4714AC UOs\290_005_U4714AC_UT_RDY7_UO05_PSH.DGN
$$$$USERNAME$$$$

PROJECT REFERENCE NO.	SHEET NO.
U-4714AC	UO-06

UTILITIES BY OTHERS

NOTE:
ALL PROPOSED UTILITY WORK SHOWN ON THIS SHEET WILL BE DONE BY OTHERS. NO PAYMENT WILL BE MADE TO THE CONTRACTOR FOR PROPOSED UTILITY WORK SHOWN ON THIS SHEET.

NAD 83/NA 2011

MCI/VERIZON HANDHOLE & 2" CONDUIT AT 5' MINIMUM DEPTH

WINDSTREAM BURIED LINE & TEL PED

PNG SERVICE LINES LOCATED AT 5' DEPTH

DUKE ENERGY, LUMEN, SECRA, AT&T, CHARTER, & WINDSTREAM JOINT USE LINES.

PNG MECKLENBURG COUNTY DISTRIBUTION SYSTEM | PNG UNION COUNTY DISTRIBUTION SYSTEM

BEGIN CONSTRUCTION -DRI- POT Sta.10+50.00

BEGIN CONSTRUCTION -Y28- POT Sta.12+04.00

VERIZON 432CT FIBER AT 5' MININUM DEPTH & HANDHOLE

END CONSTRUCTION -Y26- POC Sta.11+62.96

END CONSTRUCTION -Y24- POC Sta.11+43.00

END GRADE -Y27- POC Sta.11+43.00

END CONSTRUCTION -Y27- POC Sta.12+10.00

WINDSTREAM BURIED COMM LINE & TEL PEDS

MCNC (3)1.25" INNERDUCTS.

PNG 2" MDPE GAS MAIN AT MINIMUM 6' TO 8' DEPTH AROUND WATER MAIN CROSSINGS.

PNG 4" MDPE GAS MAIN AT MINIMUM 7' DEPTH AROUND WATER MAIN CROSSINGS.

MATCHLINE -L- 136+00.00 SEE SHEET UO-05

MATCHLINE -L- 150+00.00 SEE SHEET UO-07

COUCHELL FAMILY PROPERTIES LLC (118)
2309 EAST JOHN ST LLC (110)
BERBICE ENTERPRISE LLC (113)
2425 EAST JOHN ST LLC (115)
ROKTAL PROPERTY DEVELOPMENT LLC (117)
BELTWAY INDUSTRIAL PARK LLC (119)
AJC LLC (120)
JEFFREY R CARROLL AND WIFE TERESA A CARROLL (121)
F & B LLC (120)
JOSEPH C MARTIN (100)
SHIRLEY HAUNG (101)
RM MATTHEWS LLC (103)
HAROLD JOSEPH TENNANT (102)
AMY C MCNABB
RICKY LEE KLUTZ AND WIFE RAYMOUTH JEAN KLUTZ
WTNW PROPERTIES INC (181)
JEFFREY CLEGG PRESSLEY & EDWARD EARL SUGGS
EAST JOHN SYSTEMS, L.L.C. (105)
JEFFREY C PRESSLEY (106)
EAST JOHN SYSTEMS, L.L.C. (107)
CAROLINA WATER SERVICE INC OF NC
VICTORIA T MCPHATTER
DIANNE T GALLOWAY
PHYLLIS T BRYOM
ALICE T NICHOLS
CRYSTAL BC PROPERTIES LLC (108)
EASTWOOD FOREST BAPTIST CHURCH (109)
WELDON D. POWELL (182)

SR 1009 E JOHN ST 23' BST
SR 1009 OLD MONROE RD 24' BST (BEGINS)
SR 1009 E JOHN ST (ENDS)
SR 3556 HARWOOD PL BST
SR 1009 E JOHN ST BST
SR 1009 E JOHN ST 24' BST
SR 1009 E JOHN ST 28' BST
SR 1009 E JOHN ST 30' BST
SR 1009 E JOHN ST 36' BST
SR 1009 E JOHN ST 56' BST
SR 1009 E JOHN ST 60' BST
SR 1009 E JOHN ST 72' BST
SR 1009 E JOHN ST 72' BST
SR 1009 E JOHN ST 72

PROJECT REFERENCE NO.	SHEET NO.
U-4714AC	UO-07

UTILITIES BY OTHERS

NOTE:
ALL PROPOSED UTILITY WORK SHOWN ON THIS SHEET WILL BE DONE BY OTHERS. NO PAYMENT WILL BE MADE TO THE CONTRACTOR FOR PROPOSED UTILITY WORK SHOWN ON THIS SHEET.

NAD 83/NA 2011

MATCHLINE -Y2- 14+50.00
SEE UO-7A

MCI/VERIZON 432 CT FIBER AT 5' MINIMUM DEPTH & HANDHOLE

PNG 2" MDPE GAS MAIN AT MINIMUM 4' DEPTH

SEGRA BURIED COMM LINE AT 10' DEPTH ALONG BACK OF RIGHT-OF-WAY

BEGIN CONSTRUCTION
-Y1- POT Sta.10+00.00

PNG 2" MDPE GAS MAIN AT 6.5' MINIMUM DEPTH AROUND WATER MAIN CROSSINGS.

CHARTER 24CT FIBER TO TIE INTO EXISTING ABOVE GROUND PEDESTAL AFTER CONSTRUCTION

CHARTER 30"X48" VAULT

WINDSTREAM BURIED COMM LINES & TEL PEDS TIED INTO POLES.

END CONSTRUCTION
-Y29- POC Sta.11+50.00

PROPOSED WINDSTREAM BELT DLC FACILITIES

MCNC BURIED LINE & HANDHOLE

MCNC (3)1.25" INNERDUCTS & HANDHOLES.

DUKE ENERGY, LUMEN, SEGRA, AT&T, CHARTER, VERIZON/MCI, & WINDSTREAM JOINT USE LINE

MCI/VERIZON 432CT FIBER

WINDSTREAM TEL PED

PNG 2" MDPE GAS MAIN AT 6' MINIMUM DEPTH AROUND WATER MAIN CROSSINGS.

CHARTER 24CT FIBER & 30" X 48"VAULT

PNG 2" MDPE GAS MAIN AT 5' MINIMUM DEPTH WITH 1' OFFSET FROM RIGHT-OF-WAY

WINDSTREAM BURIED COMM LINES & TEL PEDS TIED INTO POLE.

MCI/VERIZON FIBER & HANDHOLE

MATCHLINE -L- 150+00.00
SEE SHEET UO-06

MATCHLINE -L- 164+00.00
SEE SHEET UO-08

MATCHLINE -Y2B- 13+00.00
SEE UO-7A

MATCHLINE -Y2A- 14+00.00
SEE UO-7A

SAFELITE ELECTRIC, INC

MARK S. SIMPSON AND WIFE CAROL L. SIMPSON

MARIA COPSIS TASSOPOULOS AND HUSBAND, TIMOTHY ASSOPOULOS AS A ONE-THIRD UNDIVIDED INTEREST AS TENANTS BY THE ENTIRETY AND PETER ONE-HALF UNDIVIDED INTEREST AS TENANTS BY THE ENTIRETY

JOHNSON WALTON CURTIS & HESTA T

KIMBERLY B. CROWE

179 METROLINA MEDICAL PROPERTIES LLC

180 TOWN OF STALLINGS

132

131

130

133

133A

134 TIMOTHY & RANDALL DUCKWORTH

135 STALLINGS TOAD 209, LLC

LR & FR, LLC

122 STEGALL AND COMPANY INC.

123 THE POINTE AT CAMPUS RIDGE, LLC

124 WASH ONE, LLC C/O THE MOSER GROUP

125 RAINBOW TROUT PROPERTIES, LLC C/O THOMAS B MCELWEE

126

127

129 EDWARD R. SQUIRES

174 GUION FAMILY LP

GILBERTO HERNANDEZ AND WIFE MARICELA CASTILLO MORAN

Metal Pole #1 Std. Case #S35H1 -L- Sta. 158+48± RT 69'±

Metal Pole #2 Std. Case #S35H1 -L- Sta. 159+93± LT 68'±

Metal Pole #3 Std. Case #S35H1 -L- Sta. 160+77± LT 88'±

Metal Pole Custom MCI Pole -L- Sta. 160+50± RT 63'±

27-AUG-2026 10:18
M:\2017_24\70142.03 U-4714A\Utilities\U-4714AC UbOs\290_007_U4714AC_UT_RDY9_UO07_PSH.DGN
$$$$USERNAME$$$$

PROJECT REFERENCE NO.	SHEET NO.
U-4714AC	UO-7A

UTILITIES BY OTHERS

NOTE:
ALL PROPOSED UTILITY WORK SHOWN ON THIS SHEET WILL BE DONE BY OTHERS. NO PAYMENT WILL BE MADE TO THE CONTRACTOR FOR PROPOSED UTILITY WORK SHOWN ON THIS SHEET.

CHARTER 24CT FIBER CABLE & 30"X48" VAULT

AT&T BURIED COMM LINE

SEGRA BURIED FIBER LINE

TOWN OF STALLINGS
DB N/F PG N/F

WINDSTREAM TEL PED

WINDSTREAM POLE & COMM LINES

PNG 2" MDPE GAS MAIN AT 4' MIMIMUM DEPTH

DUKE ENERGY, LUMEN, AT&T, CHARTER, & WINDSTREAM JOINT USE LINE

MATCHLINE -Y2- 14+50.00
SEE UO-7

MATCHLINE -Y2A- 14+00.00
SEE UO-7

MATCHLINE -Y2B- 13+00.00
SEE SHEETS UO-7 & UO-8

NAD 83/NA 2011

DUKE ENERGY, LUMEN, SEGRA, AT&T, CHARTER, & WINDSTREAM JOINT USE LINE

END CONSTRUCTION
Y2A- POT Sta 16+65.00
(TIE TO PROJECT U-5112)

PNG 2" MDPE END CAP

TOWN OF STALLINGS
DB 6874 PG 421

STALLINGS TOWNCENTER, LLC

COLLEEN B. TEETER AND HUSBAND, HOWARD O. TEETER

HOWARD ODELL TEETER

PAUL KATOPODIS & LOULA KATOPODIS

MARGUERITE ADELE MAHAN

4390 POTTER RD, LLC

T & Y MATTHEWS, LLC

H & J PROPERTIES OF UNION COUNTY LLC

BRANDT B. BUCKWORTH AND WIFE BONNIE H. BUCKWORTH

20' UTILITY EASMENT DB 1466 PG 737

8/17/99

27-AUG-2026 11:59
M:\2017\17014\02\03 U-4714A\Utilities\U-4714AC UbOs\290_011_U4714AC_UT_RDY9A_UO7A_PSH.dgn
$$$$USERNAME$$$$

PROJECT REFERENCE NO.	SHEET NO.
U-4714AC	UO-08

UTILITIES BY OTHERS

NOTE:
ALL PROPOSED UTILITY WORK SHOWN ON THIS SHEET WILL BE DONE BY OTHERS. NO PAYMENT WILL BE MADE TO THE CONTRACTOR FOR PROPOSED UTILITY WORK SHOWN ON THIS SHEET.

NAD 83/NA 2011

HISTORIC PROPERTY

HISTORIC PROPERTY

HISTORIC PROPERTY

HISTORIC PROPERTY

143 FUNDERBURK FOUR, LLC

144 CAROLYN M. FUNDERBURK

135 ALLINGS TOAD 209, LLC

136 ALPHA OMEGA LAND DEVELOPMENT INC.

137 CAROLYN M. FUNDERBURK

138 VIVIAN E. SHECKLER

MONA-T, LLC

DUKE ENERGY, LUMEN, SEGRA, AT&T, CHARTER, & WINDSTREAM JOINT USE LINE

WINDSTREAM BURIED 48CT FIBER CABLE

PROPOSED CHARTER FIBER TO TIE INTO EXSITING

BEGIN CONSTRUCTION
-Y30- POC Sta.12+22.00

PNG 2" MDPE GAS MAIN AT 5.5' TO 6.5' DEPTH AROUND WATER CROSSINGS

MCNC (3)1.25" INNERDUCTS

MCI/VERIZON 432CT FIBER AT 5' MINIMUM DEPTH

MCI/VERIZON 432 CT FIBER AT 5' MINIMUM DEPTH & HANDHOLE

PNG 2" MDPE GAS MAIN AT 7' MINIMUM DEPTH

PNG 2" MDPE GAS MAIN AT 6' MINIMUM DEPTH AT DRAINAGE CROSSING

BEGIN CONSTRUCTION
-Y3I- POC Sta.14+15.00

END GRADE
-Y3- POT Sta.13+50.00

END CONSTRUCTION
-Y3- POC Sta.14+55.00

END CONSTRUCTION
-Y3A- POT Sta.10+85.00

MATCHLINE -L- 164+00.00
SEE UO-07

MATCHLINE -Y2B- 13+00.00
SEE UO-11

MATCHLINE -L- 178+00.00
SEE SHEET UO-09

GLORIA WILLIAMS SHERIN AND HUSBAND DAVID MICHAEL SHERIN

JUSTIN M. COLE AND WIFE, KELLY A. COLE

27-AUG-2026 11:26
M:\2017\2417\0182\03 U-4714AC\Utilities\U-4714AC_UtDs\290_008_U4714AC_UT_RDY10_UO08_PSH.DGN
$$$$ USERNAME $$$$

PROJECT REFERENCE NO.	SHEET NO.
U-4714AC	UO-09

UTILITIES BY OTHERS

NOTE:
ALL PROPOSED UTILITY WORK SHOWN ON THIS SHEET WILL BE DONE BY OTHERS. NO PAYMENT WILL BE MADE TO THE CONTRACTOR FOR PROPOSED UTILITY WORK SHOWN ON THIS SHEET.

NAD 83/NA 2011

MATCHLINE -L- 178+00.00
SEE SHEET UO-08

MATCHLINE -L- 192+00.00
SEE SHEET UO-10

BEGIN CONSTRUCTION
-Y33- POT Sta.12+30.00

WINDSTREAM TELEPHONE PED & BURIED COMM LINES

MCI/VERIZON 432CT FOC BURIED LINE AT 5' MINIMUM DEPTH

DUKE ENERGY, LUMEN, SEGRA, AT&T, CHARTER, & WINDSTREAM JOINT USE LINE

MCNC (3)1.25" INNERDUCTS

DUKE ENERGY, LUMEN, SEGRA, AT&T, CHARTER, & WINDSTREAM JOINT USE LINE

PNG 6" MDPE GAS MAIN AT 6' MINIMUM DEPTH

PNG 6" MDPE GAS MAIN AT 6' MINIMUM DEPTH AROUND WATER MAIN CROSSINGS

CHARTER TO PLACE 30" X 48" VAULT

PNG 6" MDPE GAS MAIN AT 6' MINIMUM DEPTH AT WATER MAIN CROSSINGS

SEGRA BURIED COMM LINES

BEGIN CONSTRUCTION
-Y34- POC Sta.12+27.00

END CONSTRUCTION
-Y35- POT Sta.11+35.00

M. BRENT HUFFMAN AND WIFE KIMBERLY C. HUFFMAN

KIMBERLY M. DELGADO

JOSEPH G. LANE AND WIFE, WENDY T. LANE

WILLIAM A. LAUSTSEN & ALICIA M. LAUSTSEN

CASSANDRA J. MAKOWSKI & DENNIS JAMES MAKOWSKI JR.

ANDREY LASHTUR

HISTORIC PROPERTY FROM STA. 179+31 TO STA. 180+42 -L- RT
CAROLYN M. FUNDERBURK

BONNIE FAYE MARTIN AND KIMBERLY DAWN SIETMANN

MARTIN AND KIMBERLY DAWN SIETMANN

HOMESALES INC.

RONALD LEE ALLED SEPERATED

TAE KYU PARK AND WIFE, OH SEON PARK

IME INVESTMENTS GROUP, INC

COUCHELL PETER JR

DAVID M SMITH & DEBBIE H SMITH

B.E. THOMPSON AND DEWEY THOMAS PRIEST

NJV ENTERPRISES, LLC

TIMOTHY L. SHERIN

TIMOTHY L. SHERIN AND WIFE, DAWN M. SHERIN

RZR LOVE LLC

SR 1009 OLD MONROE ROAD

KERRY GREENS DR

CAT AMBA CIR

HOMEWOOD WAY

RHODEHAM DR

10' DRAINAGE EASEMENT

20' LANDSCAPE EASEMENT

PROJECT REFERENCE NO.	SHEET NO.
U-4714AC	UO-10

UTILITIES BY OTHERS

NOTE:
ALL PROPOSED UTILITY WORK SHOWN ON THIS SHEET WILL BE DONE BY OTHERS. NO PAYMENT WILL BE MADE TO THE CONTRACTOR FOR PROPOSED UTILITY WORK SHOWN ON THIS SHEET.

NAD 83/NA 2011

MCNC (3)1.25" INNERDUCTS & TEL PED

MCI/VERIZON 432CTFIBER AT 5' MINIMUM DEPTH & HANDHOLE

AT&T FIBER CABLE

PNG 6" MDPE GAS MAIN

END TIP PROJECT U-4714AC
-L- POT STA. 193+50.61 =
BEGIN TIP PROJECT U-4714BA
-L- POT STA. 10+00.00

-L- POT Sta. 10+00.00

-L- POT Sta. 20+68.26 =
-Y- POT Sta. 12+00.00

MATCHLINE -L- 192+00.00
SEE SHEET UO-09

8/17/99

27-AUG-2026 11:48
M:\2017\2417014\03 U-4714A\Utilities\U-4714AC UbOs\290_010_U4714AC_UT_RDY12_UO10_PSH.DGN
$$$$USERNAME$$$$