PROJ. REFERENCE NO.	SHEET NO.
R-0513BB/C	TCP-152

SP 03353

SIGN NUMBER: SP-03353
TYPE: A
QUANTITY: 1
SIGN WIDTH: 1219mm
HEIGHT: 1219mm
TOTAL AREA: 1.5 Sq.m
BORDER TYPE: FLUSH
RECESS: 13mm
WIDTH: 19mm
RADII: 35mm
NO. Z BARS: N/A
LENGTH: N/A

BACKG COLOR: Fluorescent Orange
COPY COLOR: Black

SYMBOL	X	Y	WID	HT

MAT'L:

DESIGN BY: CLD
PROJECT ID: ALL PROJECTS
CHECKED BY: CHECKED
DIV: DIV
STD #: W20-1
DATE: Sep 19,2003

USE NOTES: 2, 4
1. Legend and border shall be direct applied Type VII or higher reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type VII reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type VII or higher reflective sheeting.

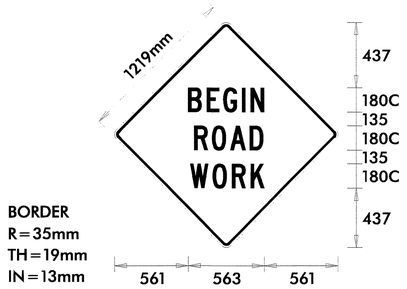

BORDER
R=35mm
TH=19mm
IN=13mm

LETTER POSITIONS

Letter spacings are to start of next letter

								Series/Size Text Length
	B	E	G	I	N			C180
561	139	122	139	64	100	561		563
	R	O	A	D				C180
586	130	136	145	100	586			511
	W	O	R	K				C180
567	167	144	139	100	567			550

Spacing Factor is 1 unless specified otherwise

FILENAME: COPY

NORTH CAROLINA D.O.T. SIGN DETAIL

SP 03350

SIGN NUMBER: SP-03350
TYPE: D
QUANTITY: 1
SIGN WIDTH: 1219mm
HEIGHT: 762mm
TOTAL AREA: 0.9 Sq.m
BORDER TYPE: FLUSH
RECESS: 6mm
WIDTH: 10mm
RADII: 38mm
NO. Z BARS: N/A
LENGTH: N/A

BACKG COLOR: White
COPY COLOR: Black

SYMBOL	X	Y	WID	HT

MAT'L:

DESIGN BY: CLD
PROJECT ID: ALL PROJECTS
CHECKED BY:
DIV:
STD #: REGULATORY
DATE: Sep 19,2003

USE NOTES: 2, 4
1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.

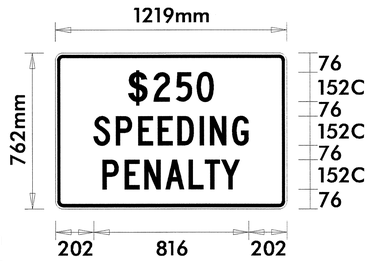

BORDER
R=38mm
W=10mm
IN=6mm

LETTER POSITIONS

Letter spacings are to start of next letter

											Series/Size Text Length
	$	2	5	0							C152
384	133	117	110	89	384						450
	S	P	E	E	D	I	N	G			C152
202	118	117	104	104	117	54	117	85	202		816
	P	E	N	A	L	T	Y				C152
248	117	104	110	123	86	86	97	248			723

Spacing Factor is 1 unless specified otherwise

FILENAME: ISHAK

NORTH CAROLINA D.O.T. SIGN DETAIL

GENERAL NOTES FOR THE "BEGIN ROAD WORK" SIGN

-SIGN SP-03353 "BEGIN ROAD WORK" ONLY APPLIES TO FULL CONTROL AND PARTIAL CONTROL OF ACCESS ROADWAYS
-WHEN USED, INSTALL SIGN SP-03353 "BEGIN ROAD WORK" ACCORDING TO DETAIL A ON SHEET TCP-150 AND 151.

GENERAL NOTES FOR THE "$250 SPEEDING PENALTY" SIGN

-SIGN SP-03350 "$250 SPEEDING PENALTY" IS USED ONLY WHEN ORDINANCED BY THE TRAFFIC ENGINEERING AND SAFETY SYSTEMS BRANCH.
-SIGN SP-03350 "$250 SPEEDING PENALTY" ONLY APPLIES TO FULL CONTROL AND PARTIAL CONTROL OF ACCESS ROADWAYS
-WHEN USED, MOUNT SIGN SP-03350 "$250 SPEEDING PENALTY" BELOW SIGN R2-1 "SPEED LIMIT XX" (SEE DETAIL A ON SHEET TCP-150) AND SIGN W21-4 "ROAD WORK AHEAD" (SEE DETAIL C ON SHEET TCP-150).

STATE OF NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.

DETAIL DRAWING FOR
WORK ZONE SIGNS
$250 PENALTY SIGN

SHEET 1 OF 1

APPROVED: John S. Kite, Jr. DATE: 6/25/04

SEAL

NORTH CAROLINA PROFESSIONAL SEAL 022104 ENGINEER JOHN S. KITE, JR.

DETAIL DRAWING FOR
ADVANCED WORK ZONE WARNING
SIGN DESIGNS

SCALE:	NONE
DATE:	08/03
DWG. BY:	
DESIGN BY:	
REVIEWED BY:	

DIVISION OF HIGHWAYS ENGINEERING BRANCH TRAFFIC ENGINEERING BRANCH

REVISIONS

CADD FILE

24-JUN-2004 12:53
F:\TCP\FINAL TCP'S\R513C_TC_TCP152.dgn
msteelman AT TETC1c3i