



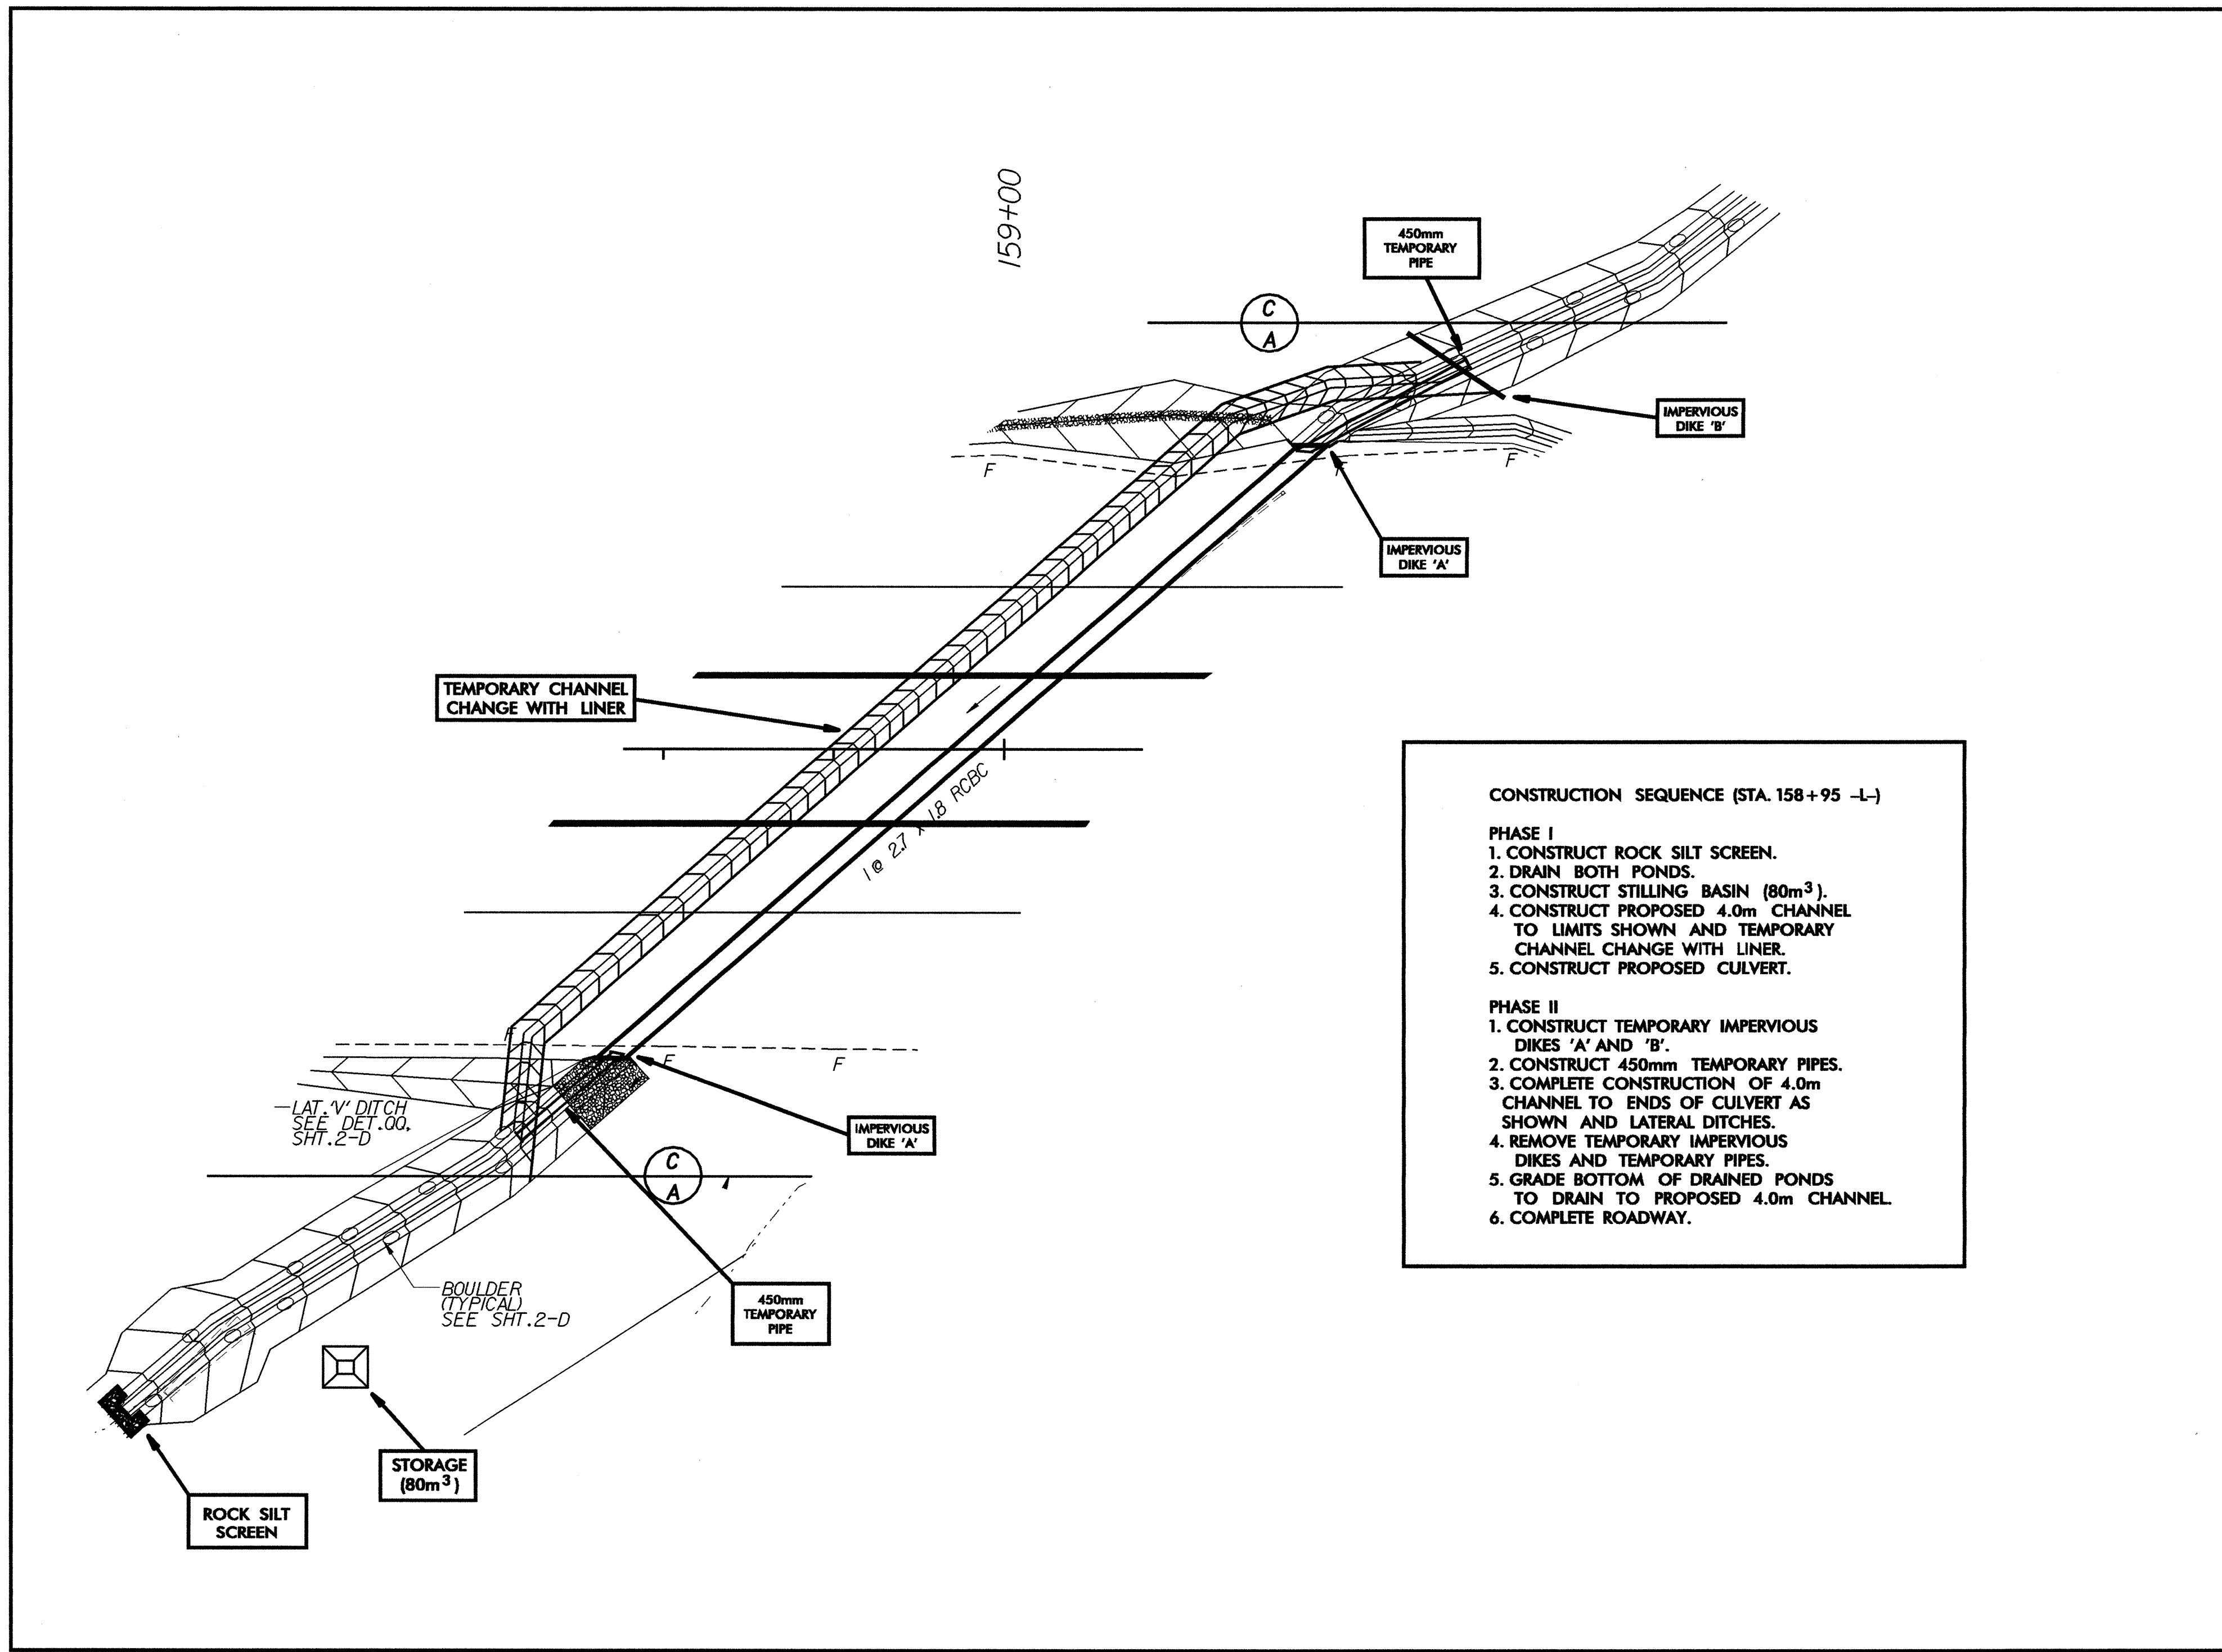

PROJECT REFERENCE NO.	SHEET NO.
R-2206B	EC-22/CONST. 20
R /W SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER
CONST.REV.	
R /W REV.	



**CONSTRUCTION SEQUENCE (STA. 158+95 -L-)**

**PHASE I**

1. CONSTRUCT ROCK SILT SCREEN.
2. DRAIN BOTH PONDS.
3. CONSTRUCT STILLING BASIN (80m<sup>3</sup>).
4. CONSTRUCT PROPOSED 4.0m CHANNEL TO LIMITS SHOWN AND TEMPORARY CHANNEL CHANGE WITH LINER.
5. CONSTRUCT PROPOSED CULVERT.

**PHASE II**

1. CONSTRUCT TEMPORARY IMPERVIOUS DIKES 'A' AND 'B'.
2. CONSTRUCT 450mm TEMPORARY PIPES.
3. COMPLETE CONSTRUCTION OF 4.0m CHANNEL TO ENDS OF CULVERT AS SHOWN AND LATERAL DITCHES.
4. REMOVE TEMPORARY IMPERVIOUS DIKES AND TEMPORARY PIPES.
5. GRADE BOTTOM OF DRAINED PONDS TO DRAIN TO PROPOSED 4.0m CHANNEL.
6. COMPLETE ROADWAY.