PROJECT REFERENCE NO.	SHEET NO.
R-2562C	Z-I

METRIC

STATE OF
NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.

METRIC DETAIL DRAWING FOR
GUARDRAIL INSTALLATION

SHEET 3 OF 7
862D02

ISOMETRIC VIEWS



PLAN



FRONT

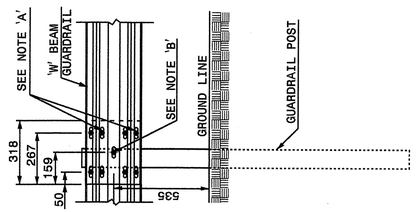

SIDE

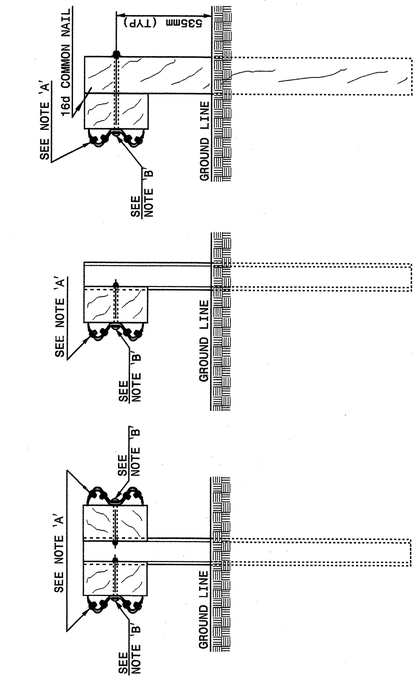

TYPICAL GUARDRAIL AND GUARDRAIL POST ALTERNATIVES

NOTES:
A - 16mm DIA. BUTTON HEAD SPLICE BOLT 32mm LONG WITH STD. WASHER UNDER NUT (8 REQ. PER SPLICE JOINT).
B - 16mm DIA. BUTTON HEAD BOLT 190mm/228mm LONG WITH NUT FOR BOLTING 150mm/200mm ROUTED OFFSET BLOCK TO STEEL POSTS OR
16mm DIA. BUTTON HEAD BOLT 457mm LONG WITH STD. WASHER UNDER NUT FOR BOLTING TO WOOD POSTS (1 REQ. PER LOCATION)
C - FIELD PUNCH HOLES INTO THE GUARDRAIL AS DIRECTED BY THE ENGINEER.

Note:
This drawing is dimensioned in millimeters unless otherwise depicted within the drawing.

STATE OF
NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.

METRIC DETAIL DRAWING FOR
GUARDRAIL INSTALLATION

SHEET 4 OF 7
862D02

PLAN



FRONT

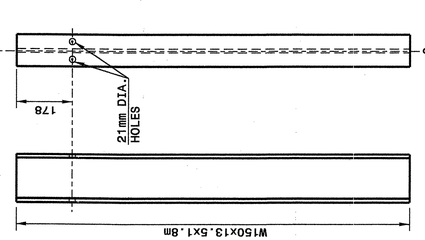

SIDE "W150" STEEL POST

SOIL PLATE
6mm THICK



PLAN



SIDE



FRONT

ROUTED WOOD OFFSET BLOCK

SYSTEM PARTS

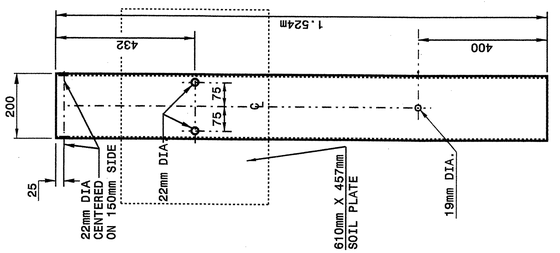

STEEL TUBE
TS 150mmx200mmx5mm



BEARING PLATE
16mm THICK PLATE

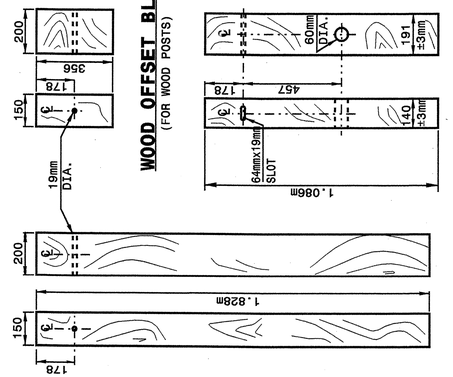

WOOD OFFSET BLOCK
(FOR WOOD POSTS)

SHORT WOOD BREAKAWAY POST

STANDARD LINE POST

Note:
This drawing is dimensioned in millimeters unless otherwise depicted within the drawing.

STATE OF
NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.

METRIC DETAIL DRAWING FOR
GUARDRAIL INSTALLATION

SHEET 4 OF 7
862D02

NORTH CAROLINA PROFESSIONAL SEAL 022966 ENGINEER LOUIS S. HOPPERTON
10/8/04

DESIGN SERVICES UNIT
STANDARDS AND SPECIAL DESIGN
Office 919-250-4128 FAX 919-250-4119

SEE PLATE FOR TITLE

ORIGINAL BY: 2002 STD.862.02 DATE:
MODIFIED BY: E.E. WARD DATE: 02-09-03
CHECKED BY: DATE: 5-03
FILE SPEC.: /usr/stds/02todetail/metric/86202/862d02m.dgn

6/10/99

22-MAY-2003 12:13
W:\Special Details\metricward\stds\02 Stds to Special Details\metric\86202\0862d02m.dgn
ericward AT DS212200