


METRIC


CONST. REV.
R/W REV.

PROJECT REFERENCE NO. R-2539C	SHEET NO. EC-18/CONST.16
R/W SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER


PHASE I

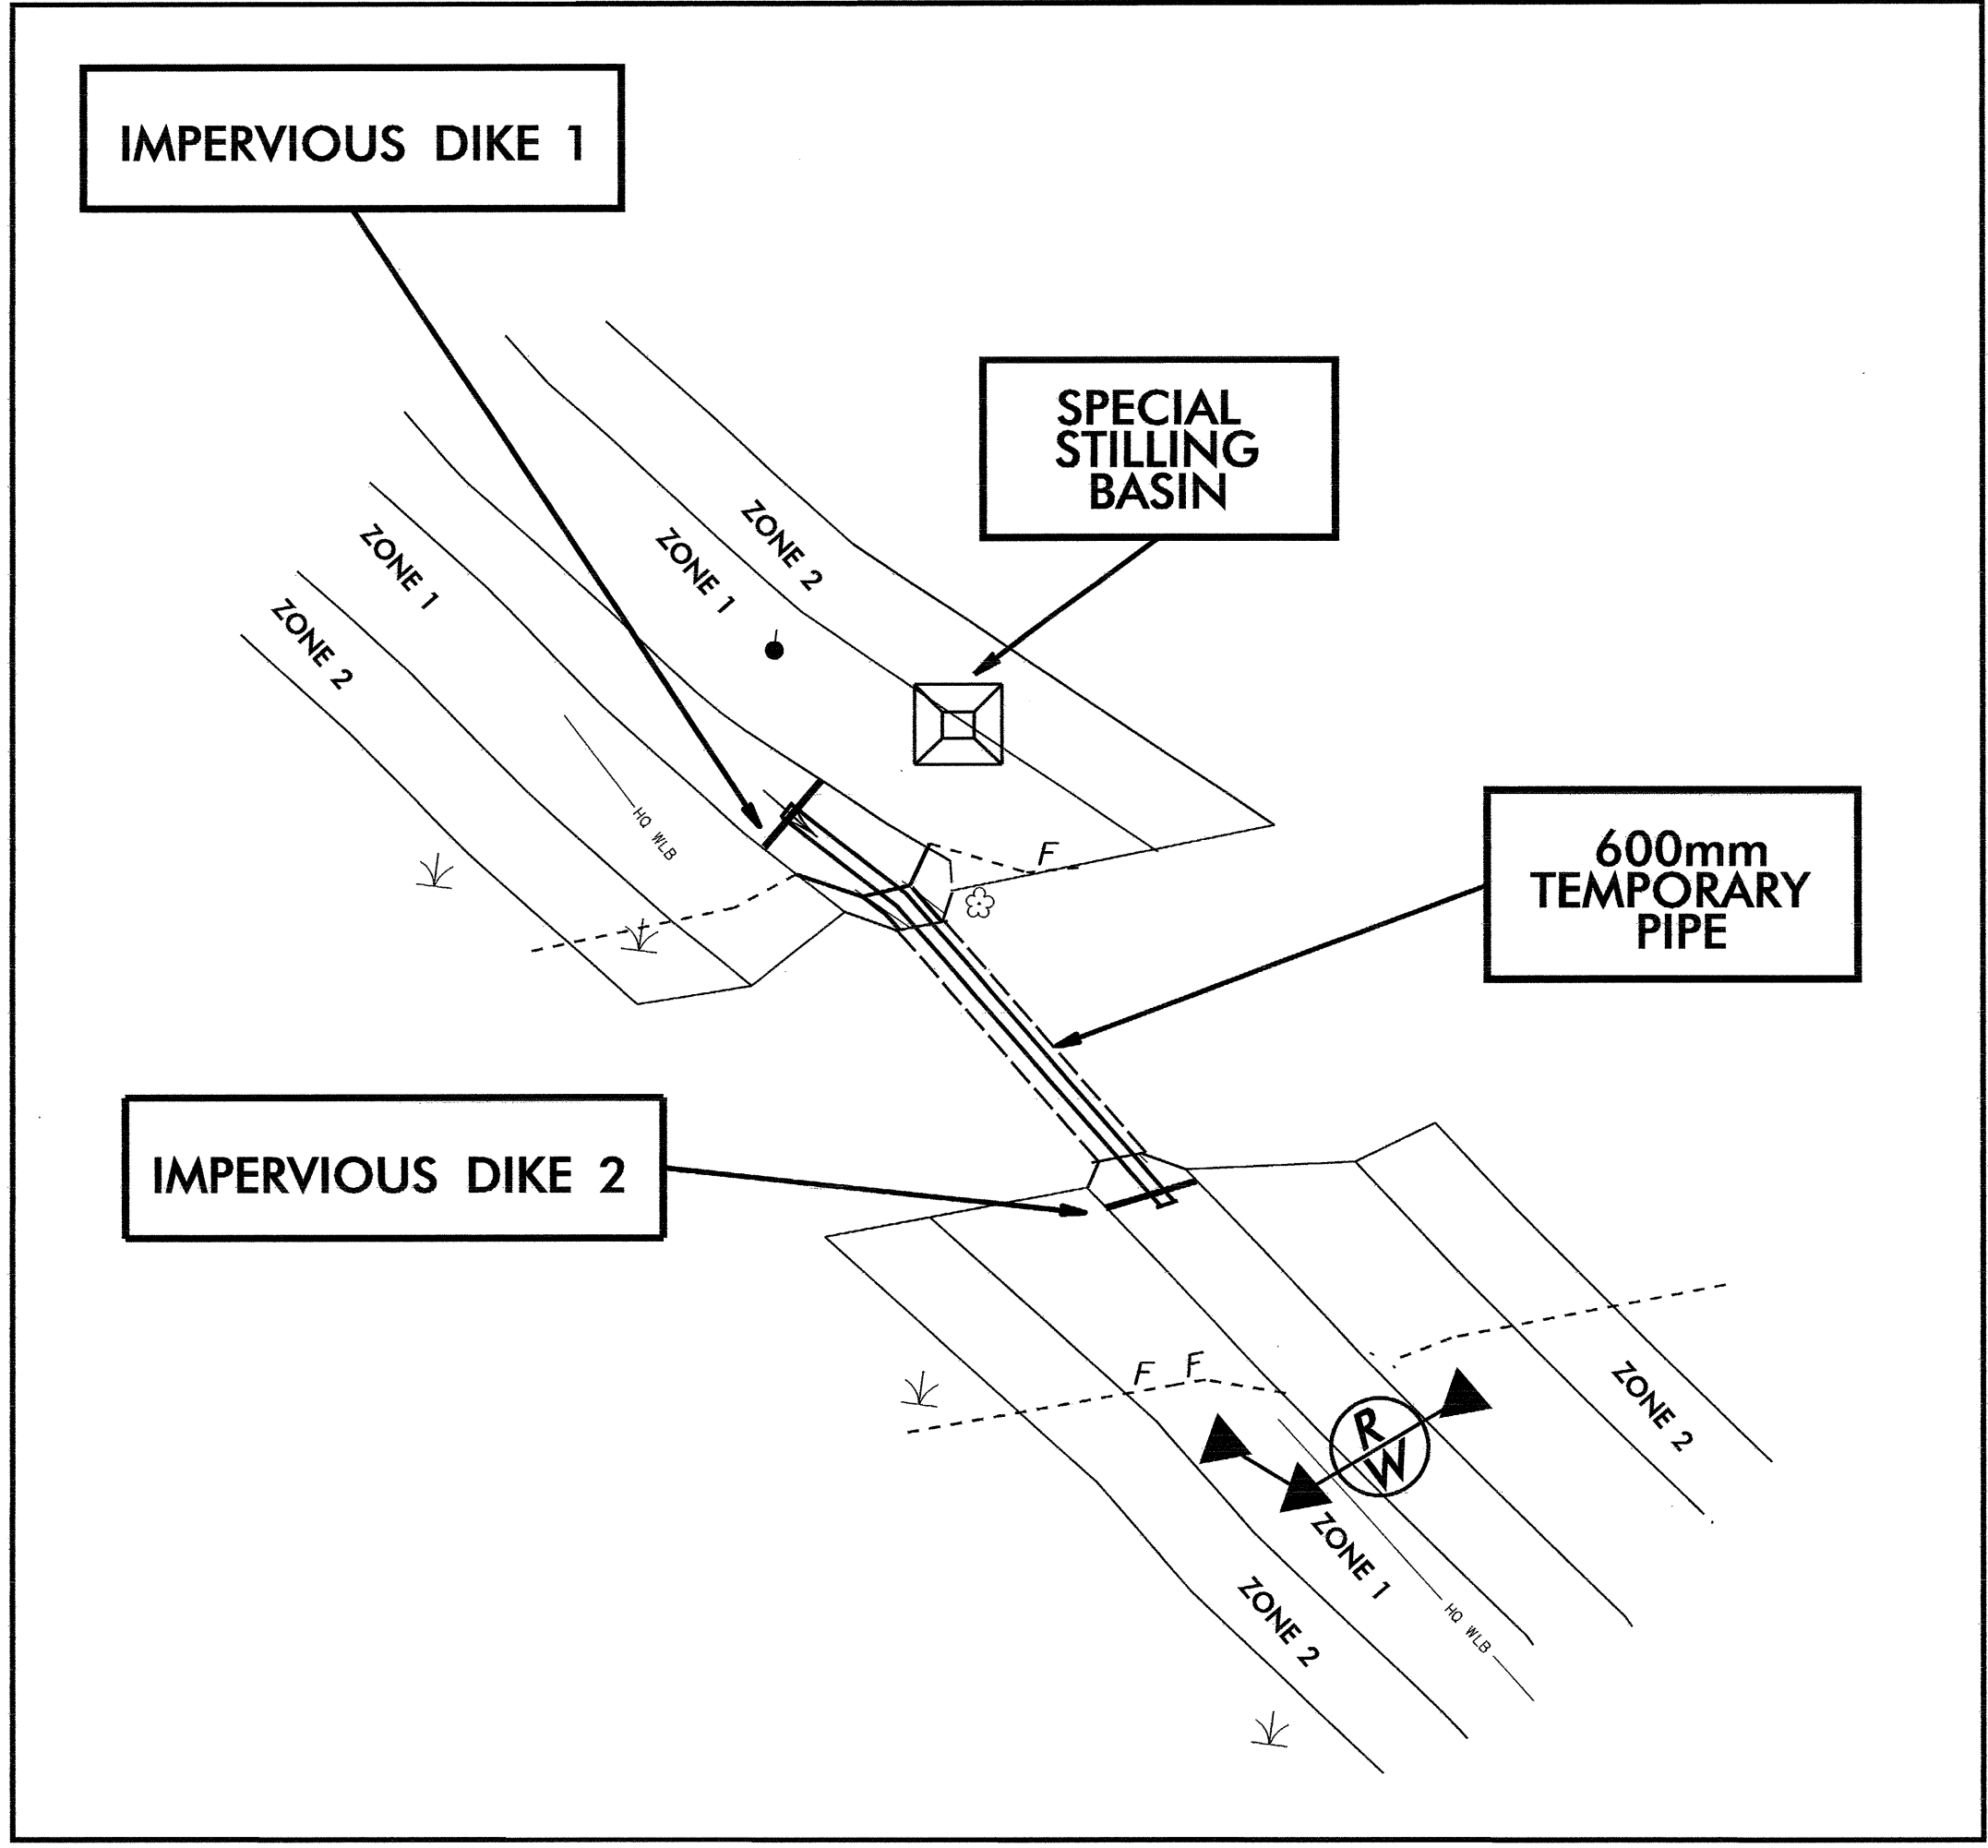

PHASE II

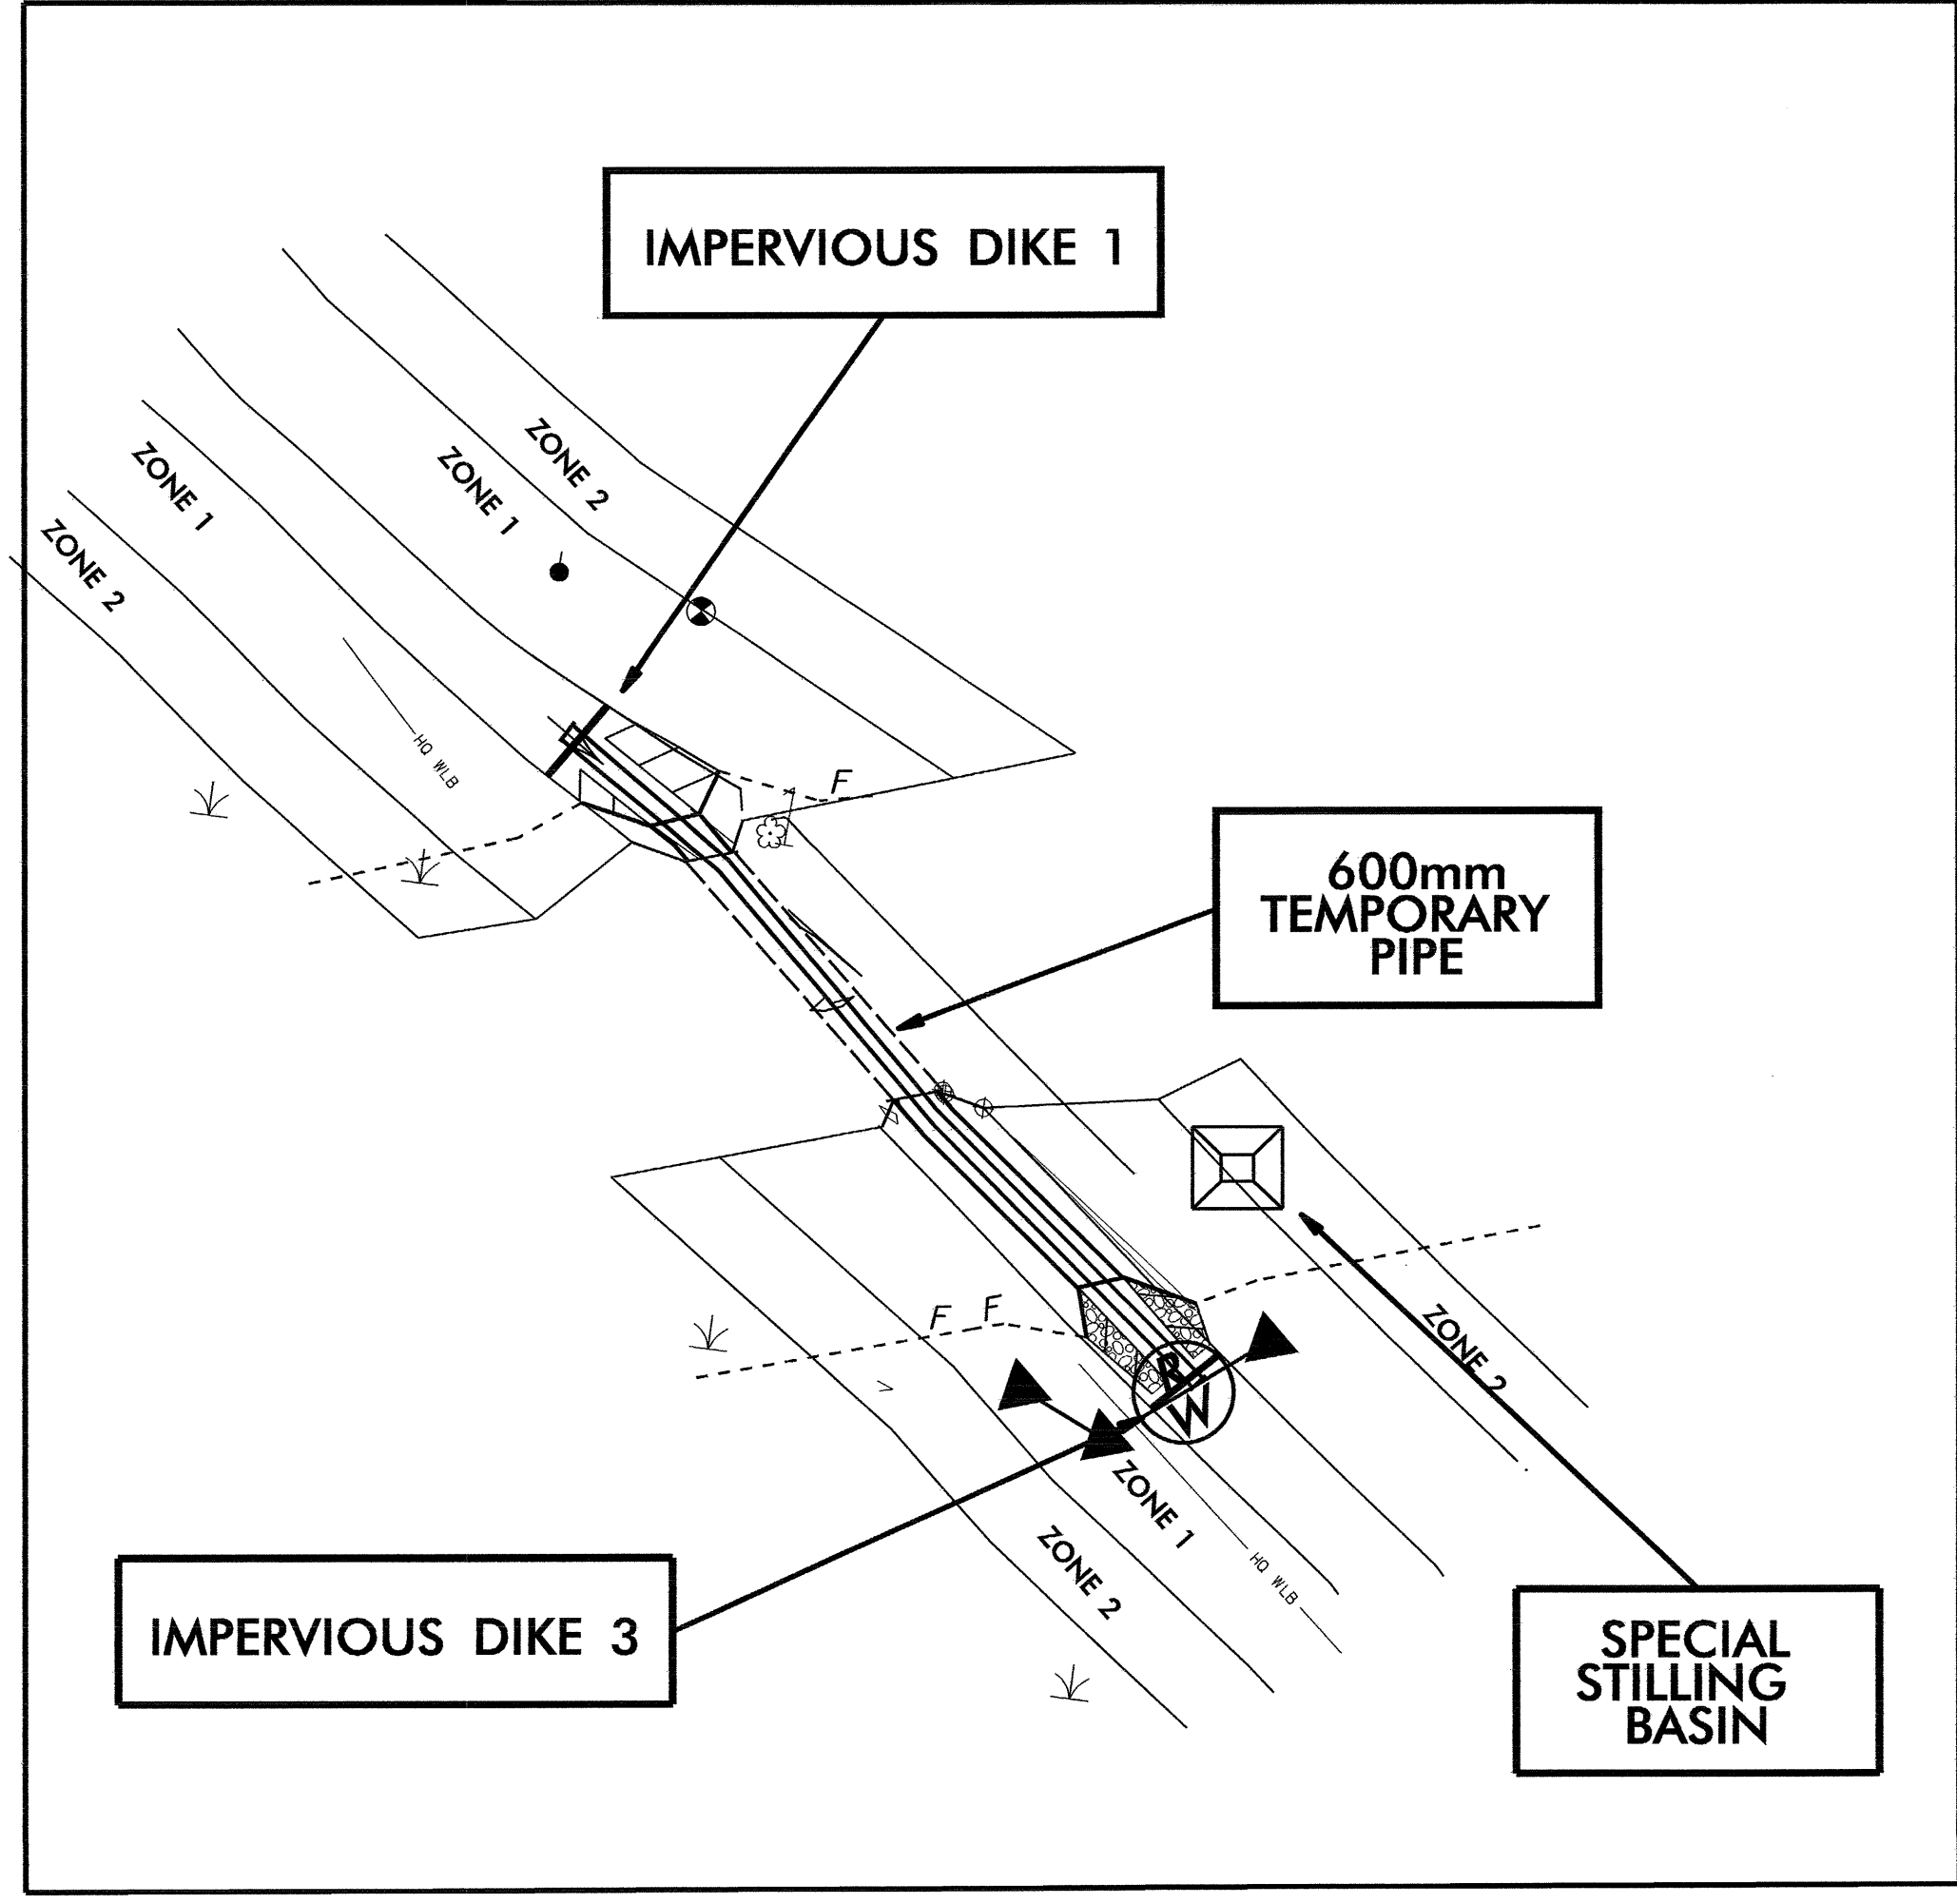

- CONSTRUCTION SEQUENCE PHASE I (STA 199+80)**
1. INSTALL SILT BAG.
 2. INSTALL IMPERVIOUS DIKE 1 & 2.
 3. INSTALL TEMPORARY 600mm PIPE.
 4. CONSTRUCT UPSTREAM CULVERT EXTENSION.

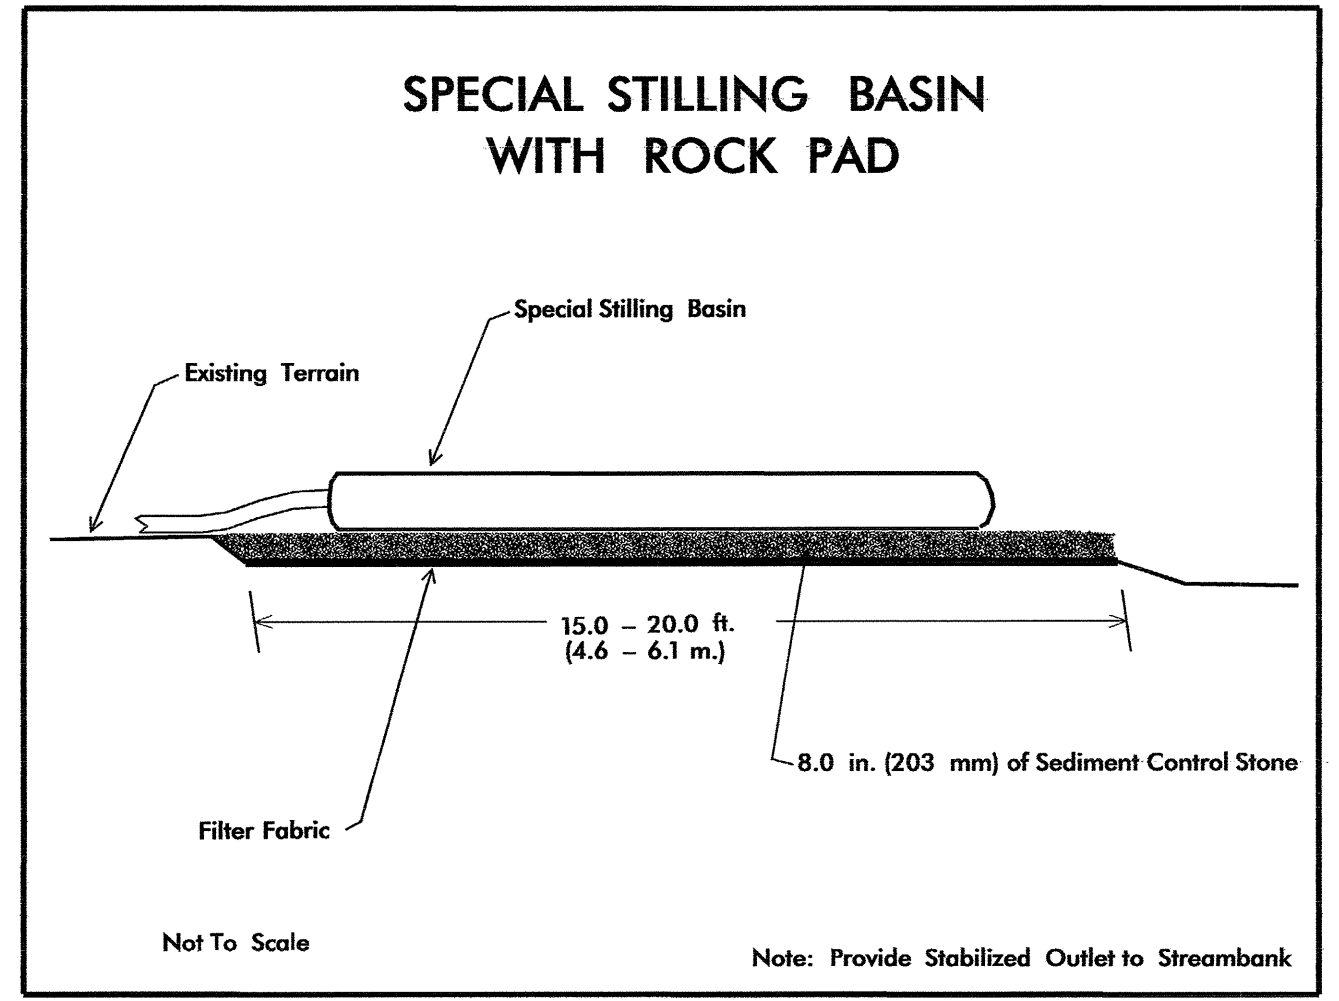

- CONSTRUCTION SEQUENCE PHASE II (STA 199+80)**
1. INSTALL SILT BAG.
 2. REMOVE IMPERVIOUS DIKE 2. (SEE PHASE I)
 3. INSTALL IMPERVIOUS DIKE 3.
 4. EXTEND 600mm TEMPORARY PIPE.
 5. CONSTRUCT DOWNSTREAM CULVERT EXTENSION.
 6. CONSTRUCT UP AND DOWN STREAM CHANNEL IMPROVEMENTS.
 7. COMPLETE ROADWAY.

04-JUN-2004 08:55
 C:\Users\jburto\My Documents\Projects\2539C\16.P16.P16
 m:\gl\tech