T.I.P.: B-5410

CONTRACT:

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION

PROJECT REFERENCE NO.	SHEET NO.
B-5410	SIGN-1

APPROVED: DocuSigned by: Ron King 0695D7A9577C4DC...

DATE: 3/10/2016

SEAL

NORTH CAROLINA PROFESSIONAL SEAL 022959 ENGINEER RONALD W. KING

SIGNING PLAN
JACKSON COUNTY

LOCATION: BRIDGE 221 OVER LITTLE SAVANNAH CREEK ON SR 1367

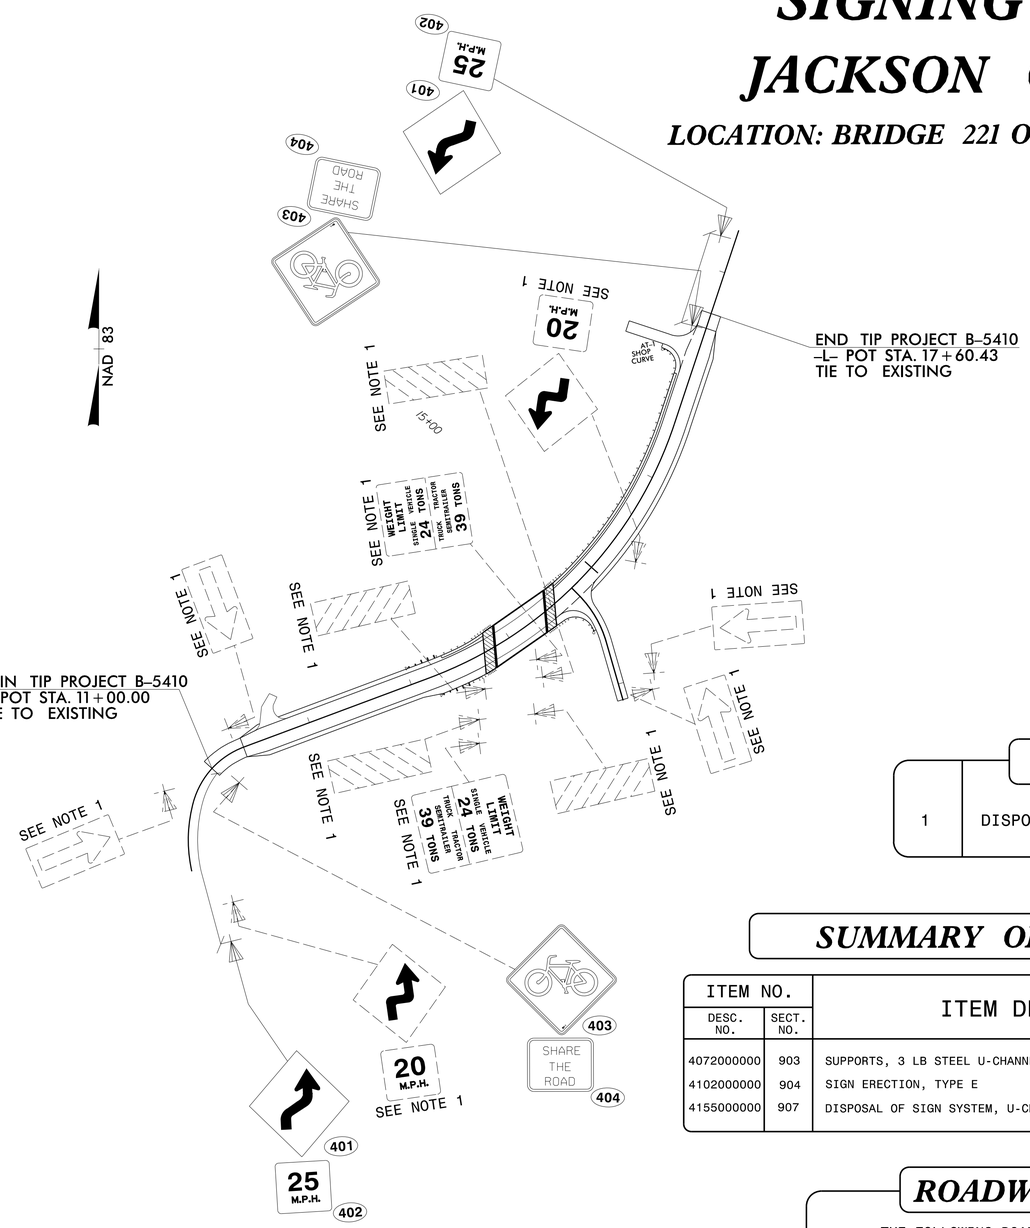

GENERAL NOTES

- SIGNS FURNISHED BY STATE
- WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER
- ALL EXISTING SIGNS ON "U" CHANNEL POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
- THE BACKGROUND FOR TYPE E & F SIGNS SHALL BE TYPE C REFLECTIVE SHEETING.
- SEE ROADWAY PLANS FOR GUARD/GUIDE RAIL DETAILS.

TYPE "E" SIGNS

401 QUANTITY REQ'D 2 30" X 30" W1-4(R) ONE "U" POST PER SIGN	403 QUANTITY REQ'D 2 30" X 30" W11-1 ONE "U" POST PER SIGN
402 QUANTITY REQ'D 2 25 M.P.H. 18" X 18" W13-1P MOUNT BELOW SIGN 401 IN 2 INSTALLATIONS ONE "U" POSTS PER SIGN	404 QUANTITY REQ'D 2 SHARE THE ROAD 18" X 24" W16-1P MOUNT BELOW SIGN 403 IN 2 INSTALLATIONS ONE "U" POSTS PER SIGN

PROJECT NOTES

1	DISPOSAL OF SIGN SYSTEM, U-CHANNEL

SUMMARY OF QUANTITIES

ITEM NO. DESC. NO.	ITEM NO. SECT. NO.	ITEM DESCRIPTION	QUANTITY	UNIT
4072000000	903	SUPPORTS, 3 LB STEEL U-CHANNEL	62	L.F.
4102000000	904	SIGN ERECTION, TYPE E	8	EA.
4155000000	907	DISPOSAL OF SIGN SYSTEM, U-CHANNEL	12	EA.

ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2012 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
904.10	ORIENTATION OF GROUND MOUNTED SIGNS
904.50	MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS

INDEX

SHEET NO.	DESCRIPTION
SIGN-1	TITLE SHEET, E SIGNS AND SIGN DETAIL SHEET

PLAN PREPARED BY: N.C.D.O.T. SIGNING AND DELINEATION UNIT

K. JORDAN — SIGNING & DELINEATION REGIONAL ENGINEER

M. TRACEY, P.E. — SIGNING & DELINEATION PROJECT DESIGN ENGINEER

STATE OF NORTH CAROLINA · DEPARTMENT OF TRANSPORTATION