


PROJECT REFERENCE NO.	SHEET NO.
R-3100B	EC-16/CONST J6
RW SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

CLEARING AND GRUBBING
EROSION CONTROL FOR
CONSTRUCTION SHEET 16




-L-
PI Sta 165+32.27
 $\Delta = 21'06''08.2''$ (LT)
 $D = 0'52''53.3''$
 $L = 2,393.98'$
 $T = 1,210.71'$
 $R = 6,500.00'$
 $e = RC$
Runoff = 72'

NAD 83 / NRS 2007

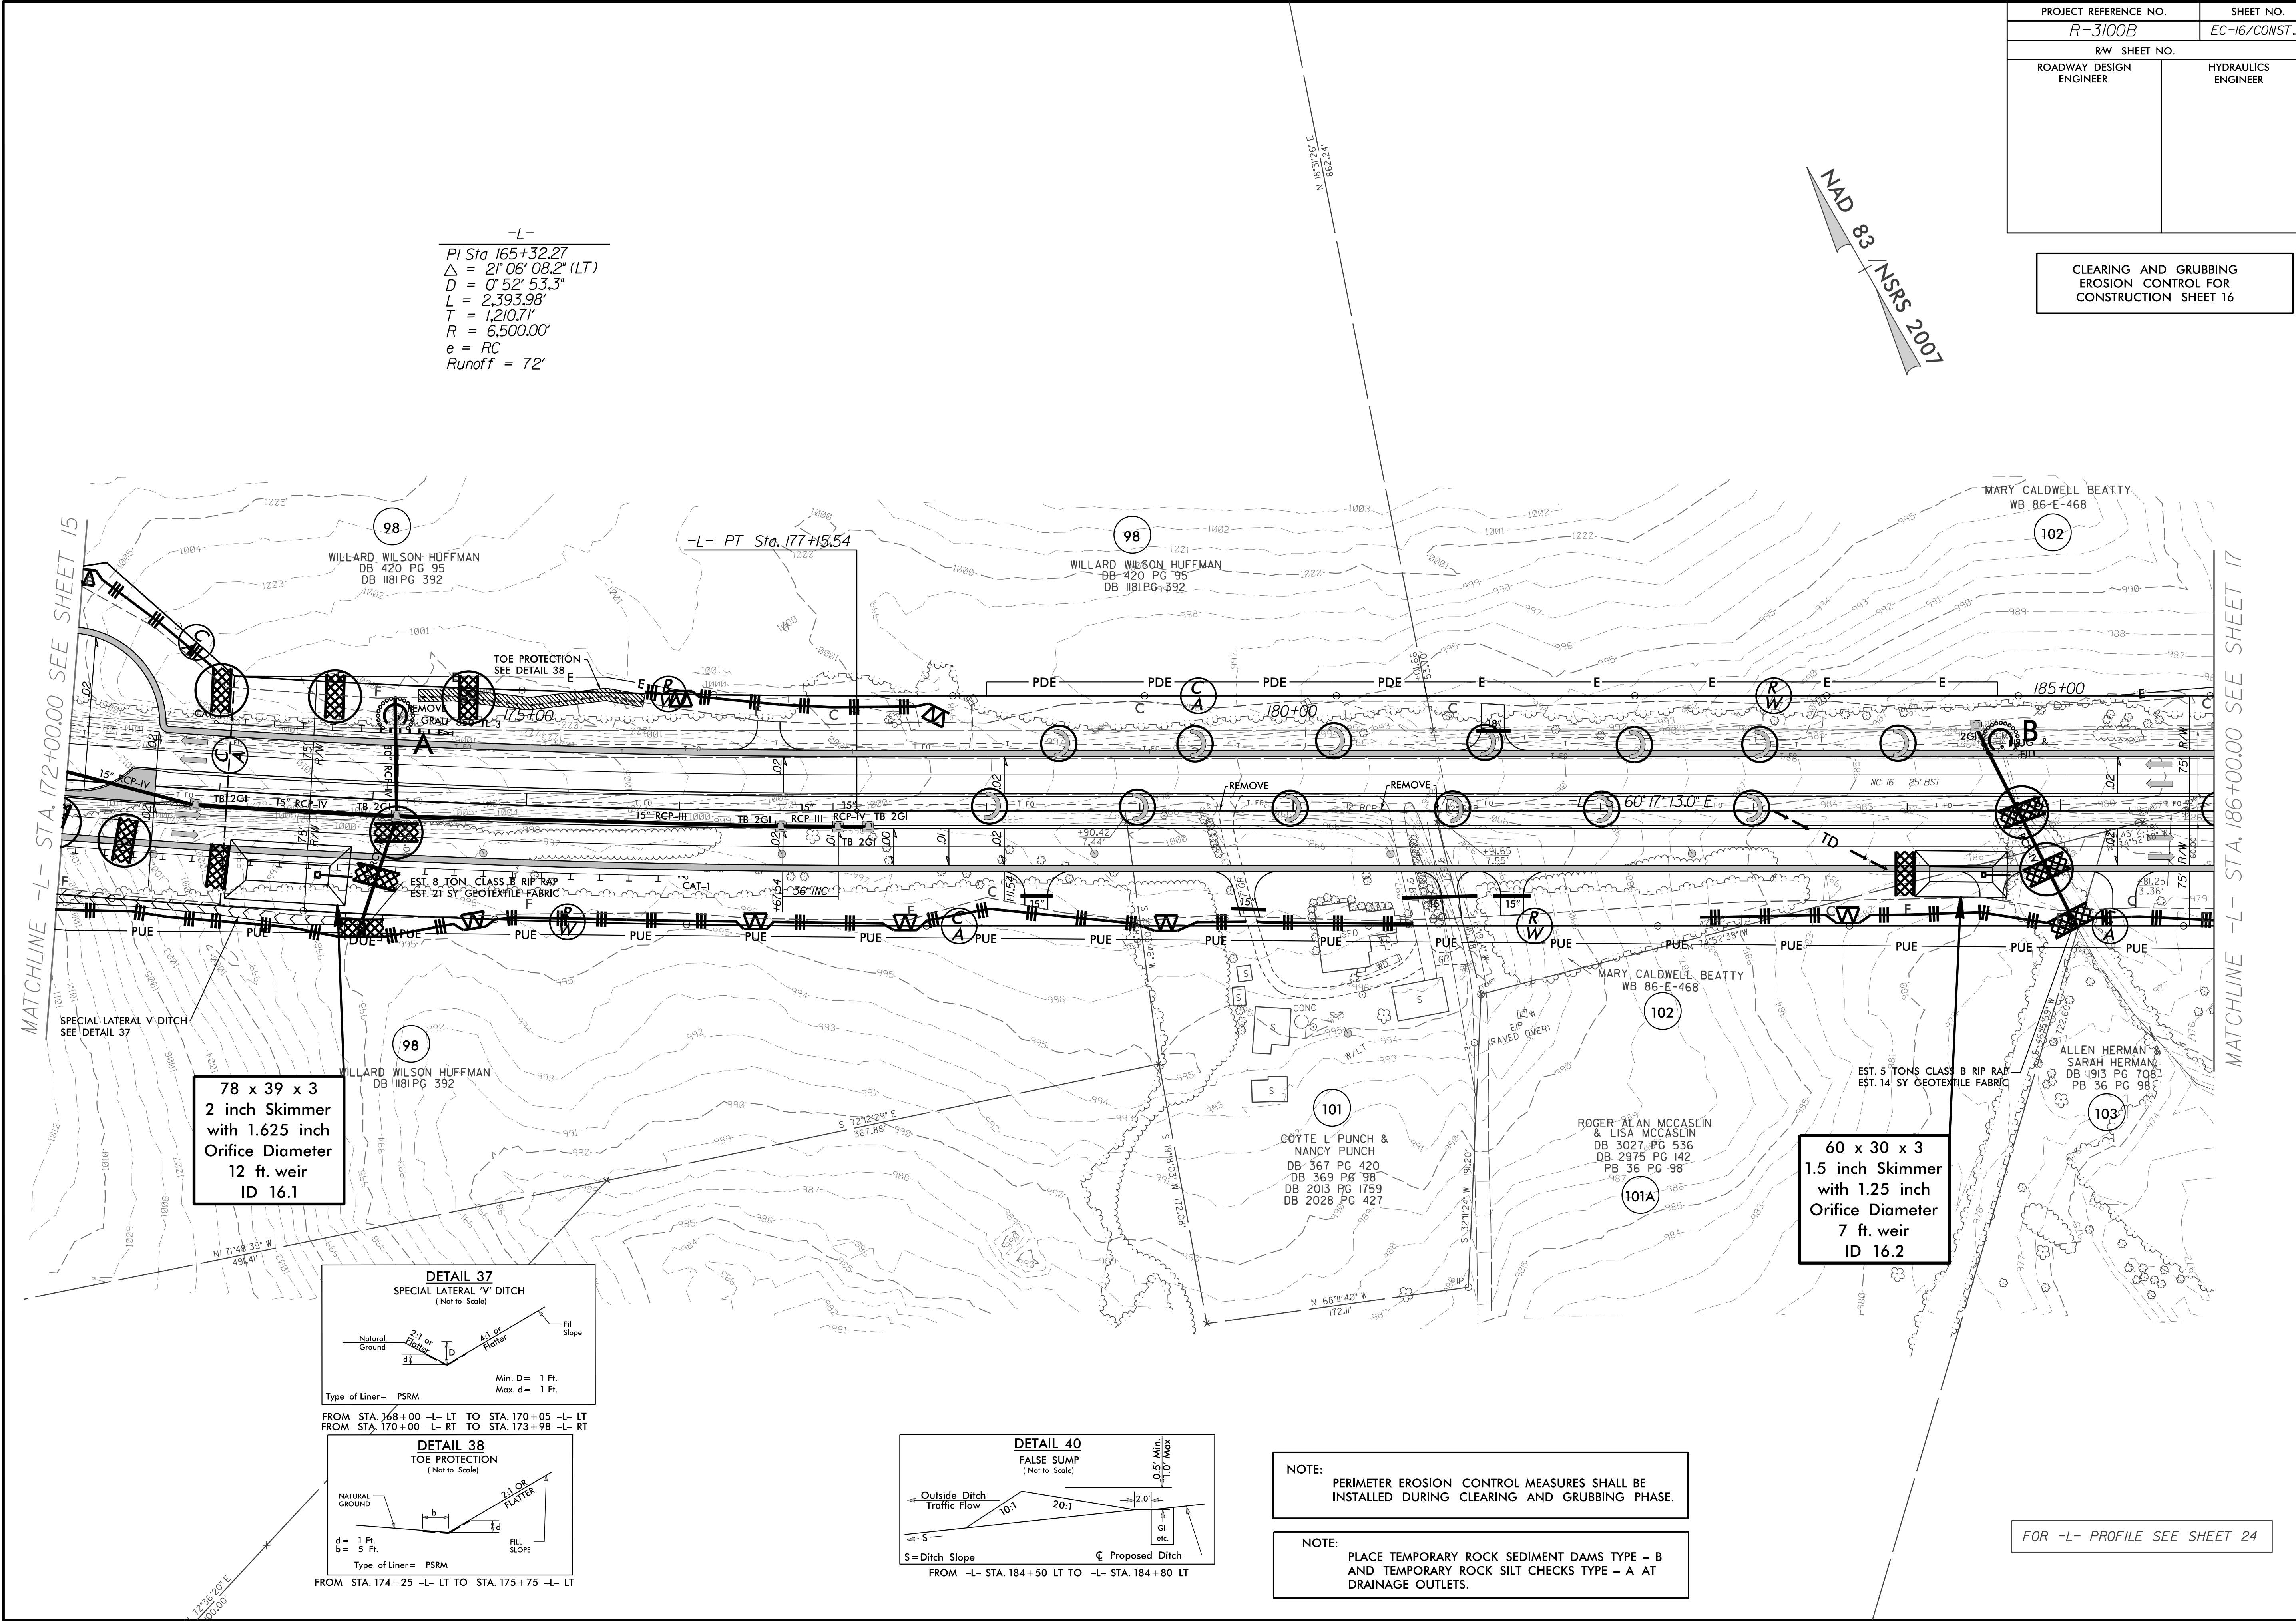

78 x 39 x 3
2 inch Skimmer
with 1.625 inch
Orifice Diameter
12 ft. weir
ID 16.1

60 x 30 x 3
1.5 inch Skimmer
with 1.25 inch
Orifice Diameter
7 ft. weir
ID 16.2

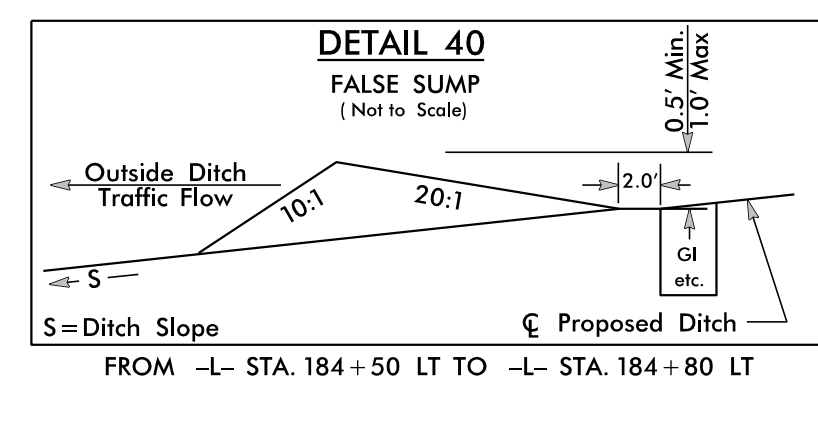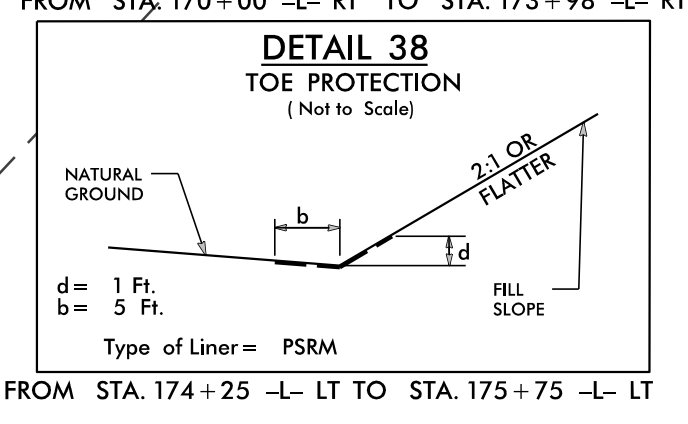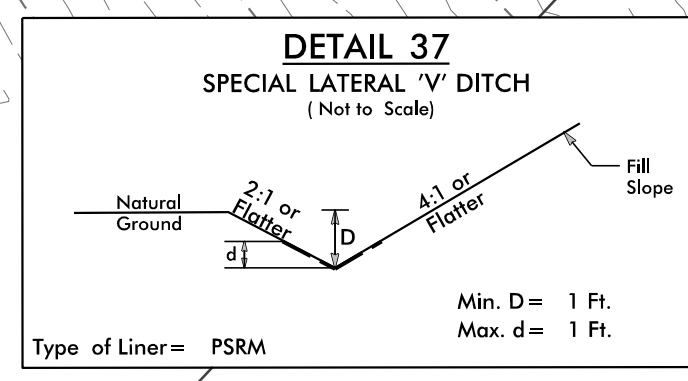

NOTE:
PERIMETER EROSION CONTROL MEASURES SHALL BE
INSTALLED DURING CLEARING AND GRUBBING PHASE.

NOTE:
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B
AND TEMPORARY ROCK SILT CHECKS TYPE - A AT
DRAINAGE OUTLETS.

FOR -L- PROFILE SEE SHEET 24