

PROJECT REFERENCE NO.	SHEET NO.
U-5828	EC-20
R/W SHEET NO.	10

CULVERT CONSTRUCTION SEQUENCE -L- 115+15

CULVERT CONSTRUCTION SEQUENCE - STAGE 1


1. CONSTRUCT TEMPORARY SKIMMER SEDIMENT BASINS.
2. UTILIZE SPECIAL STILLING BASIN(S) DURING CULVERT CONSTRUCTION AS NEEDED.
3. PROTECT STREAM WITH SILT FENCE AND DIVERT WATER USING CLEAN WATER DIVERSIONS.
4. ENSURE STREAM IS KEPT CLEAN UNTIL INSTALLATION OF PROPOSED PIPE SYSTEMS.

CULVERT CONSTRUCTION SEQUENCE - STAGE 2

1. UTILIZE SPECIAL STILLING BASIN(S) DURING CULVERT CONSTRUCTION AS NEEDED.
2. INSTALL THE TWO 24" TEMPORARY PIPES, AND ADJUST EROSION CONTROL MEASURES AS NECESSARY.
3. CONSTRUCT CLEAN WATER DIVERSION DITCHES AND IMPERVIOUS DIKES, AND DIVERT FLOW THROUGH THE TEMPORARY PIPES.
4. CONSTRUCT PROPOSED SYSTEM IN ACCORDANCE WITH THE PLANS. DO NOT ALLOW WATER TO ENTER PROPOSED STRUCTURES UNTIL FINAL GRADE.
5. REMOVE OR FILL TEMPORARY PIPE, RESHAPE DIVERSION DITCHES TO NEWLY CONSTRUCTED PIPE, AND ADJUST EROSION CONTROL MEASURES AS NECESSARY.
6. REMOVE ANY SPECIAL STILLING BASIN(S) AND STABILIZE AREAS AS NECESSARY.

K:\RAL_Roadway\012108004 - McCrimmon Parkway\Phase 1\Plan\Plan Sheets\Phase2_012108004_psh_EC20.dgn

8/28/2017

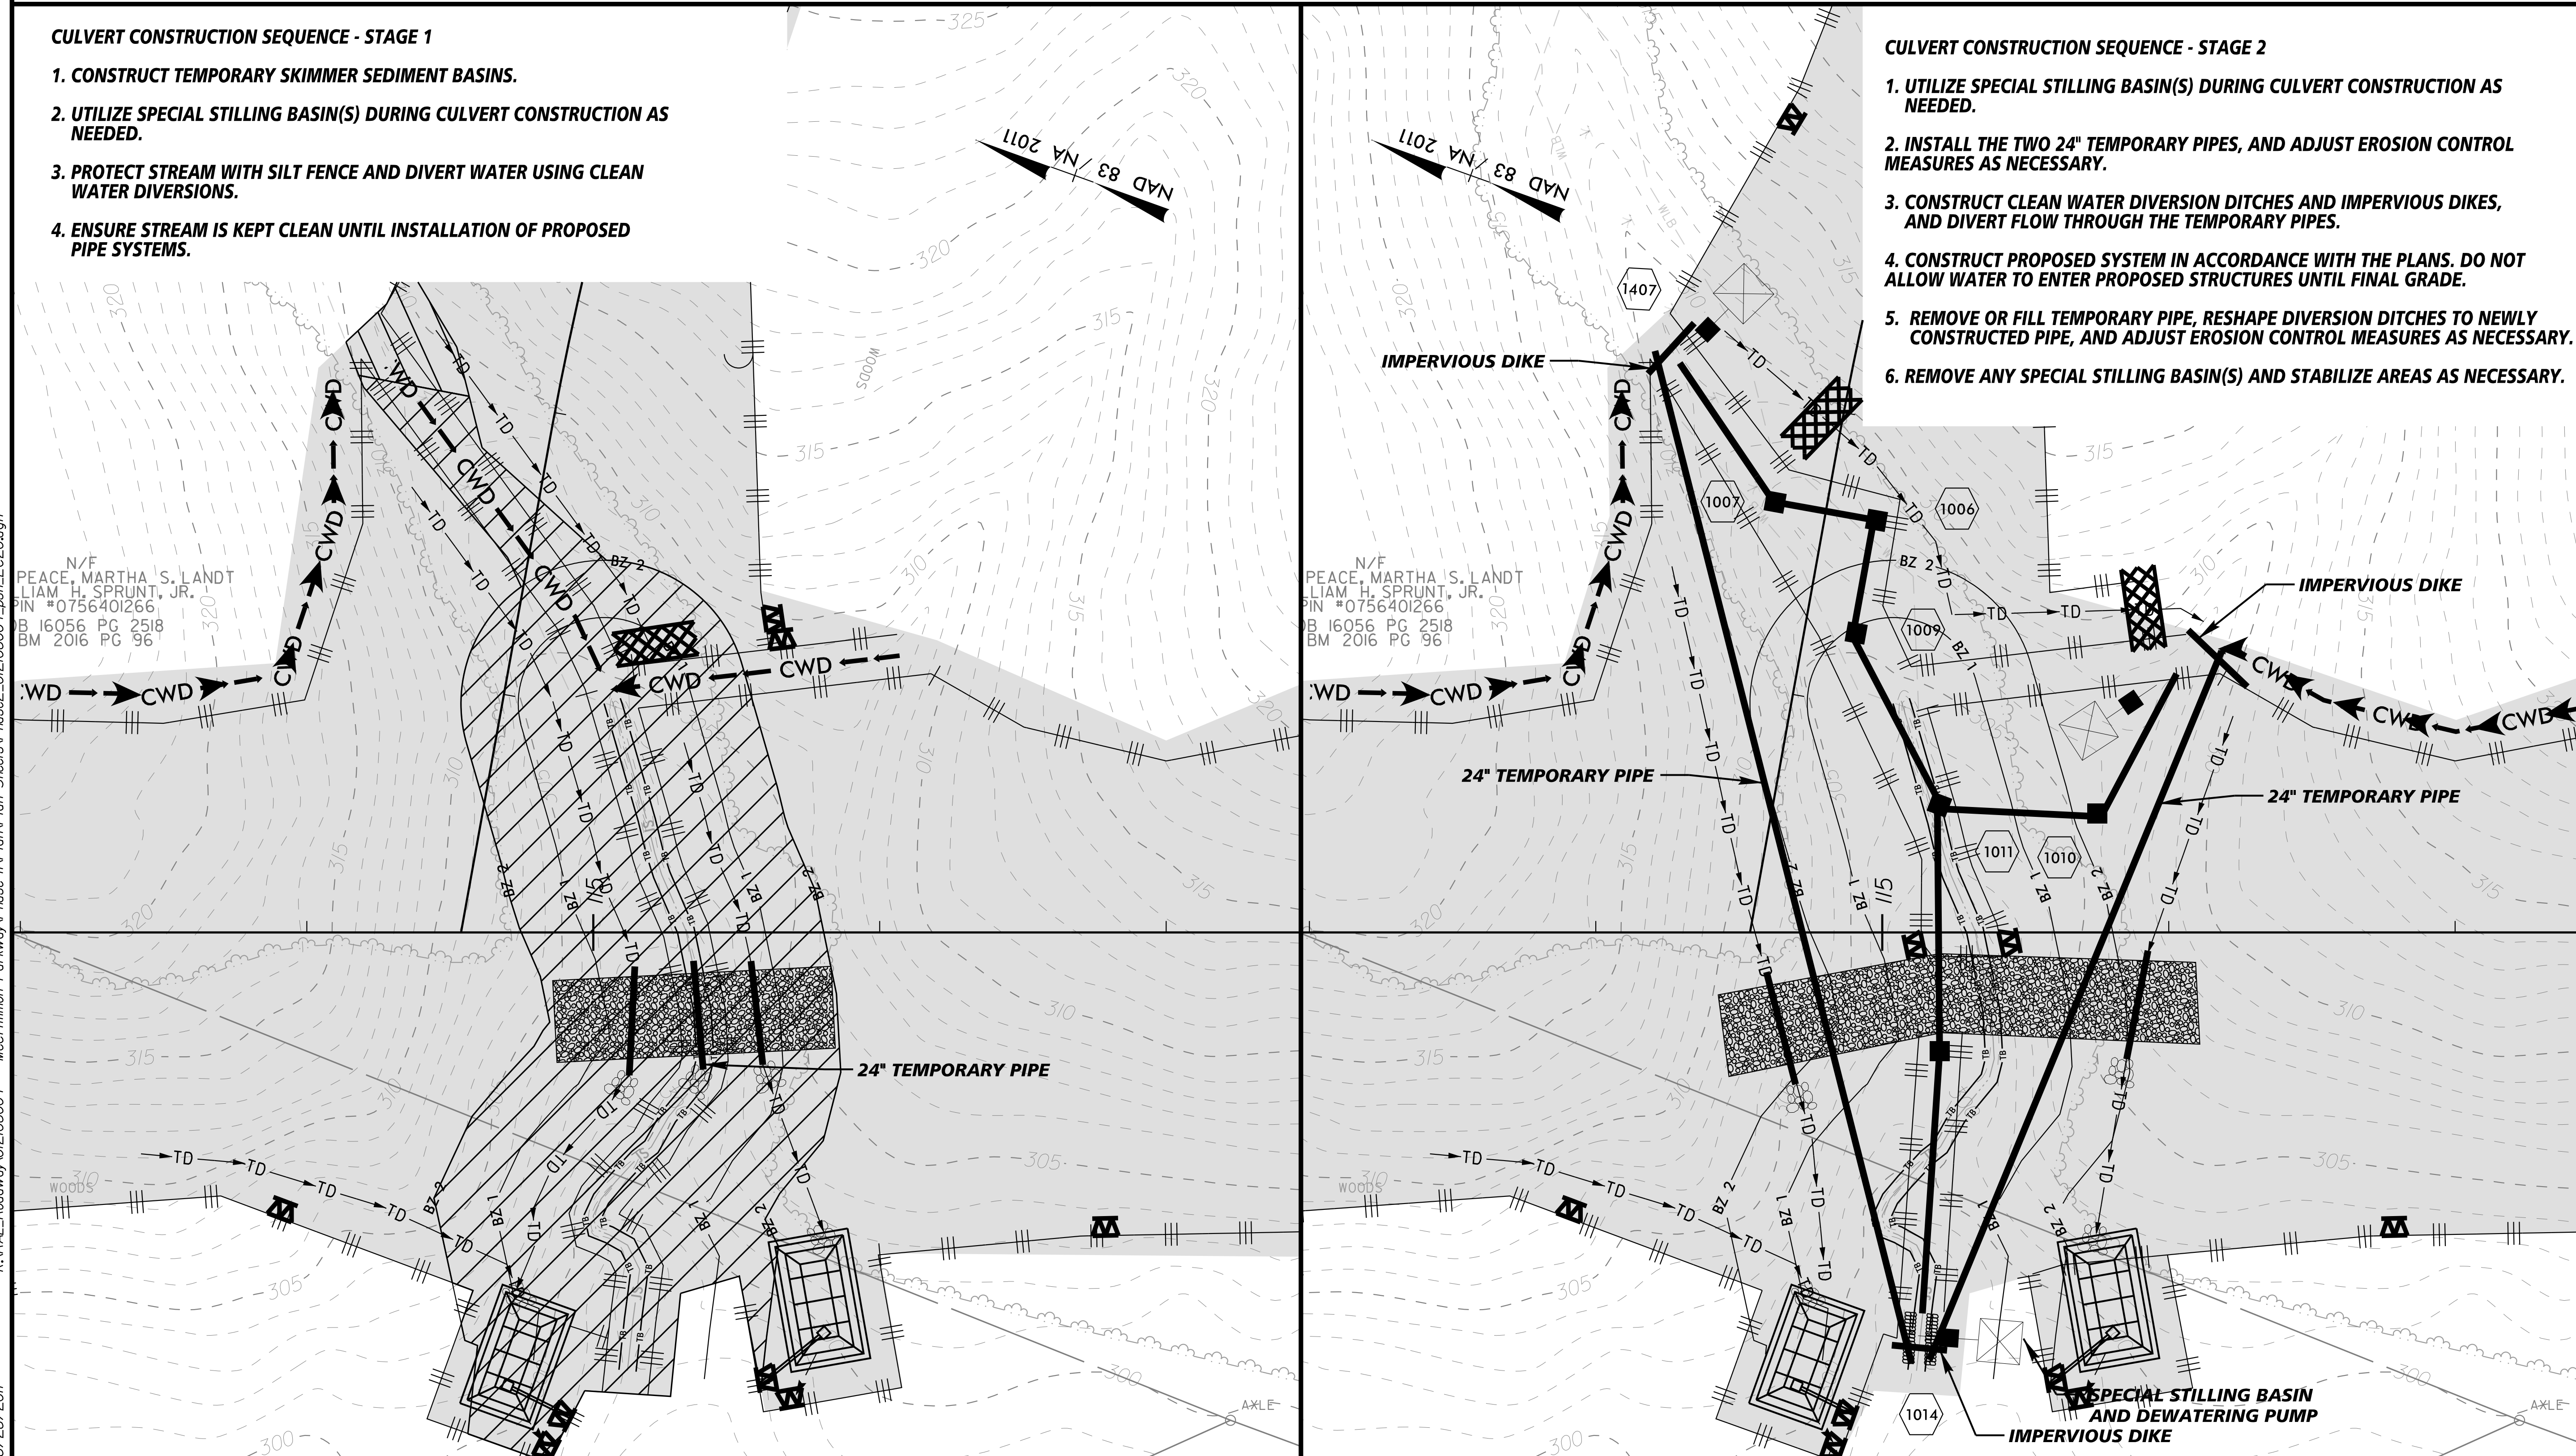

N/F
PEACE, MARTHA S. LANDT
LIAM H. SPRUNT, JR.
PIN #0756401266
B 16056 PG 2518
BM 2016 PG 96

N/F
PEACE, MARTHA S. LANDT
LIAM H. SPRUNT, JR.
PIN #0756401266
B 16056 PG 2518
BM 2016 PG 96