




# CULVERT CONSTRUCTION SEQUENCE

## STA. 14 + 99.00 -Y4-

1. INSTALL PROPOSED EROSION CONTROL MEASURES
2. INSTALL SPECIAL STILLING BASIN FOR PUMPED EFFLUENT
3. INSTALL 2@36" TEMPORARY FLEXIBLE PIPES
4. CONSTRUCT IMPERVIOUS DIKES
5. REMOVE 42" CMP TO PLUG LOCATION AND INSTALL 1@18" TEMPORARY FLEXIBLE PIPE
5. REMOVE EXISTING CULVERT
6. CONSTRUCT CULVERT AND WINGWALLS
7. INSTALL 30" RCP FROM STRUCTURE 0420 TO 0421.
8. INSTALL 42" RCP FROM STRUCTURE 0514 TO 0515 AND REMOVE 1@15" TEMPORARY FLEXIBLE PIPE.
9. CONSTRUCT INLET AND OUTLET CHANNEL IMPROVEMENTS
10. REMOVE IMPERVIOUS DIKES, REMOVE 36" TEMPORARY FLEXIBLE PIPES AND SPECIAL STILLING BASIN
11. COMPLETE ROADWAY IMPROVEMENTS

NAD  
 83 MAY 2011

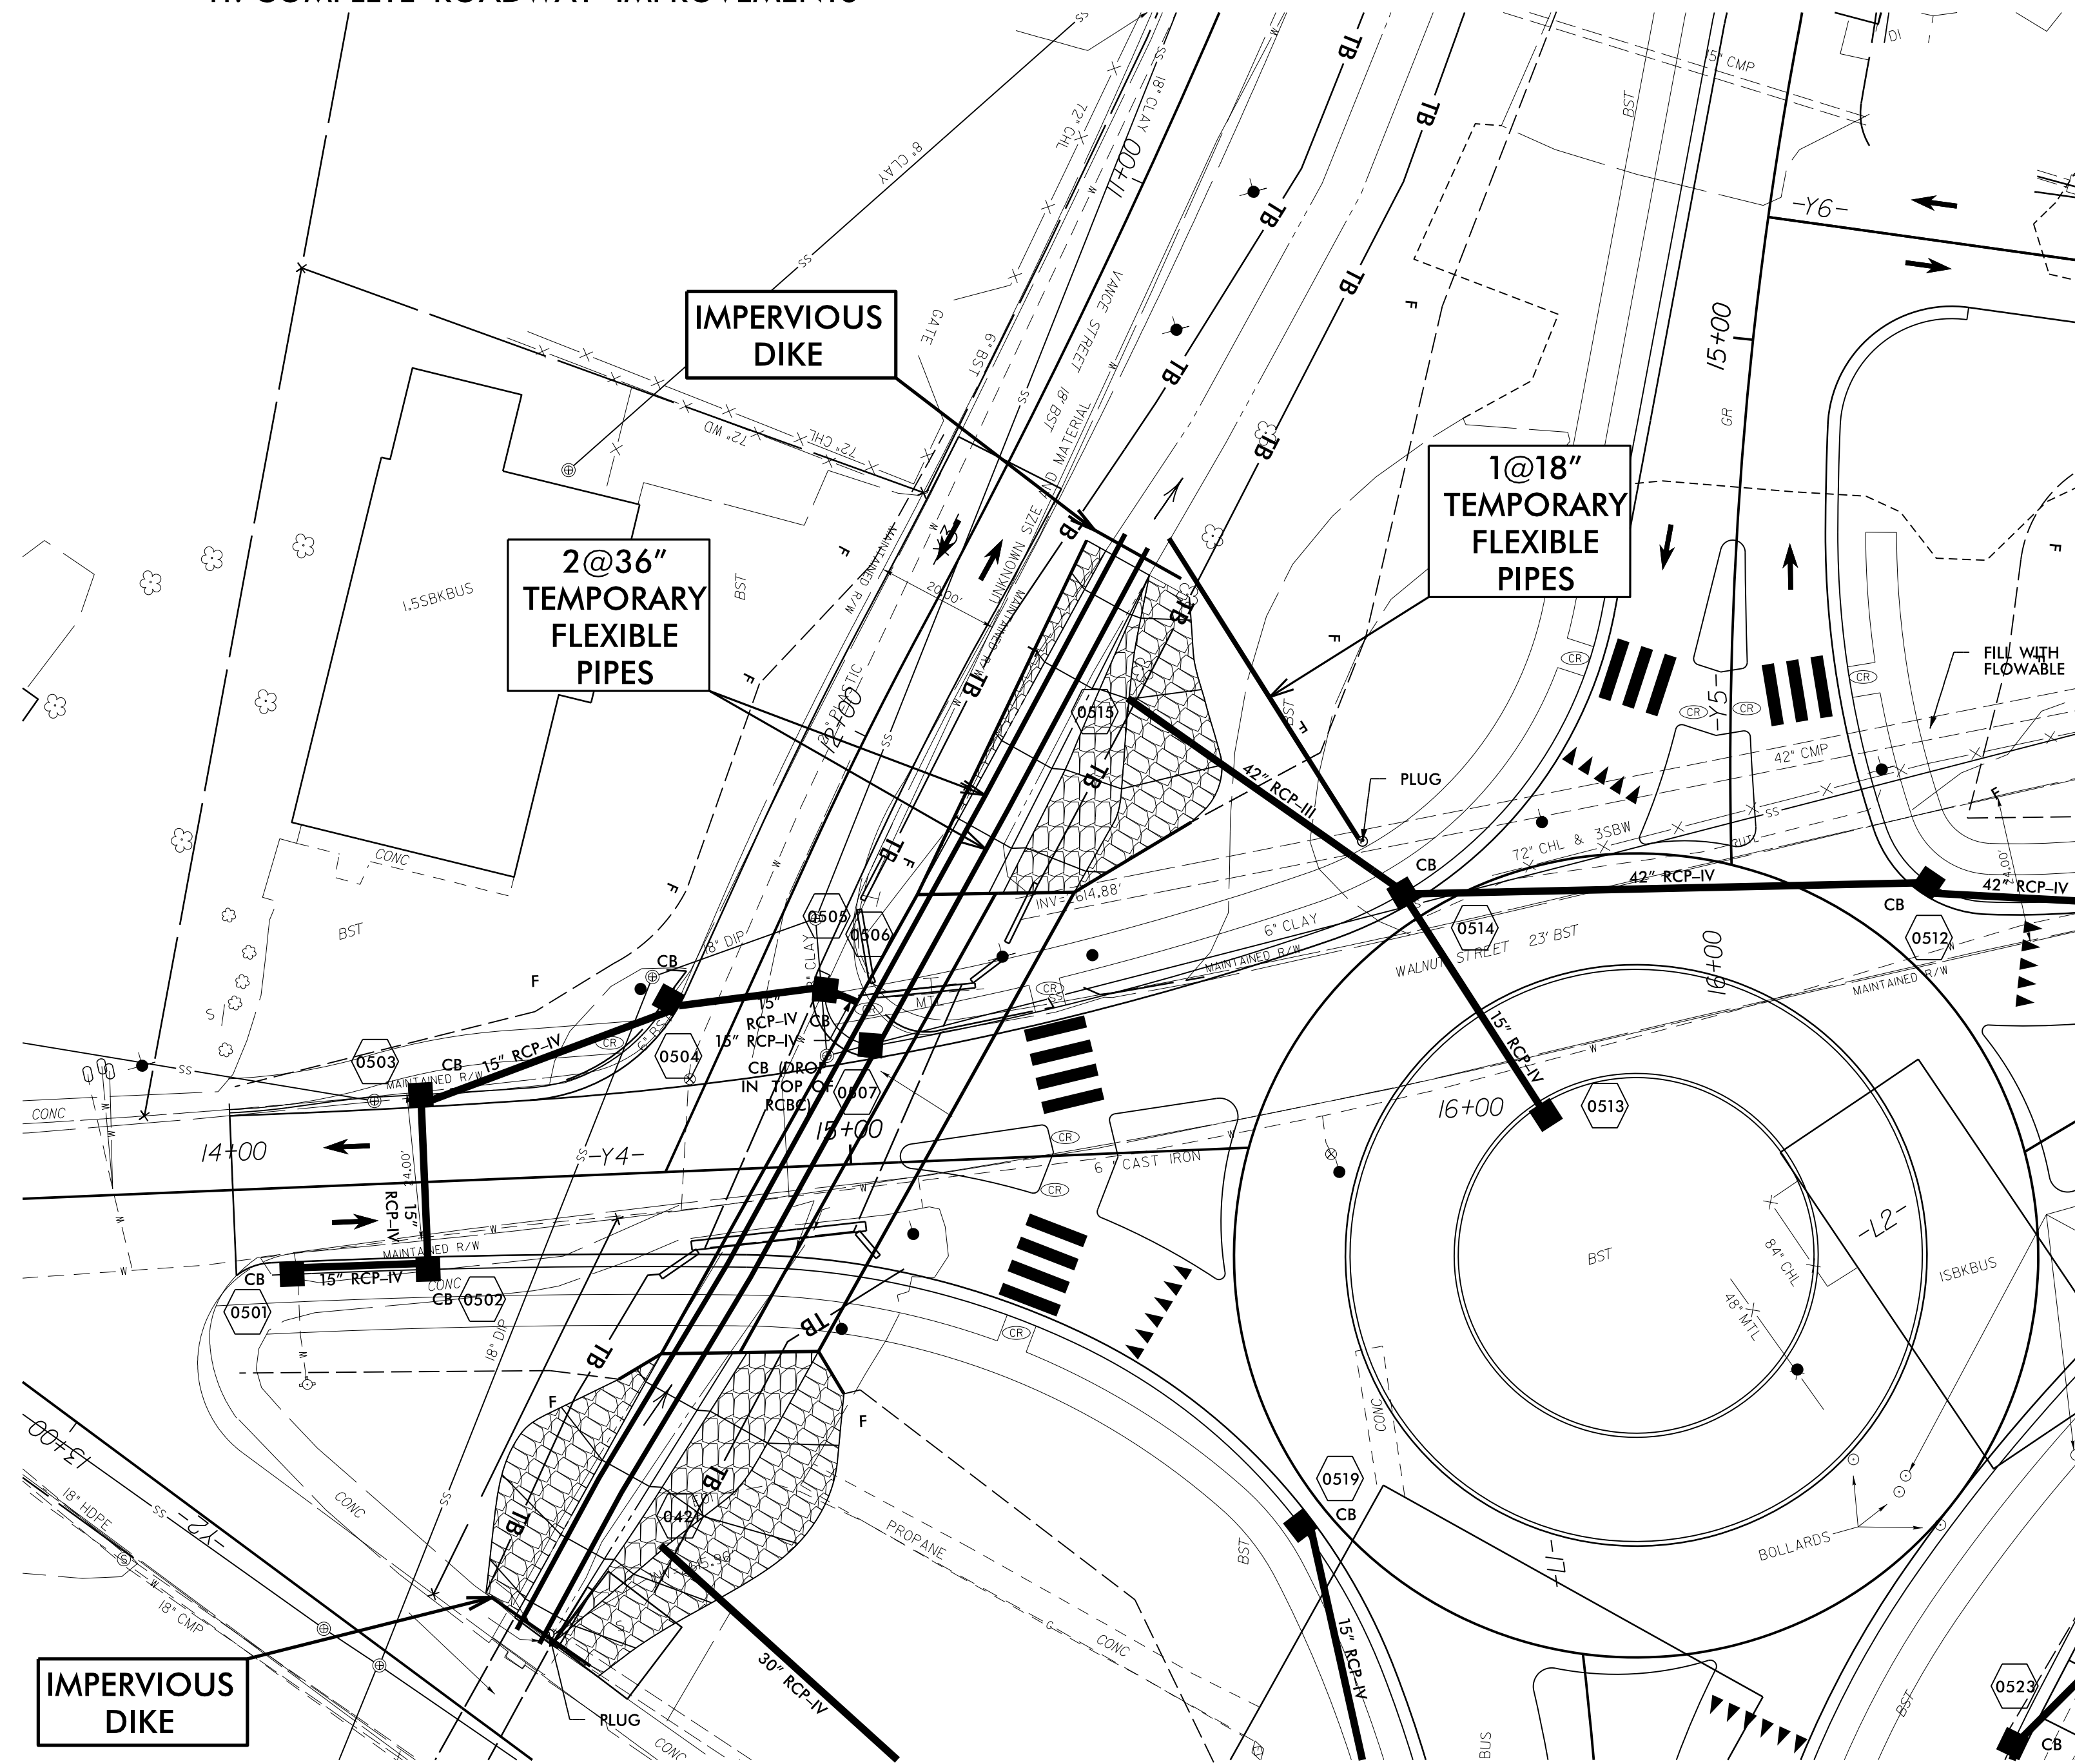

5/14/99  
 \*\*\*\*\* SYSTEMS \*\*\*\*\*  
 \*\*\*\*\* \*\*\*\*\*  
 \*\*\*\*\* \*\*\*\*\*  
 \*\*\*\*\* \*\*\*\*\*  
 \*\*\*\*\* \*\*\*\*\*