



CULVERT CONSTRUCTION SEQUENCE

STA. 12+50 +/- -Y5-

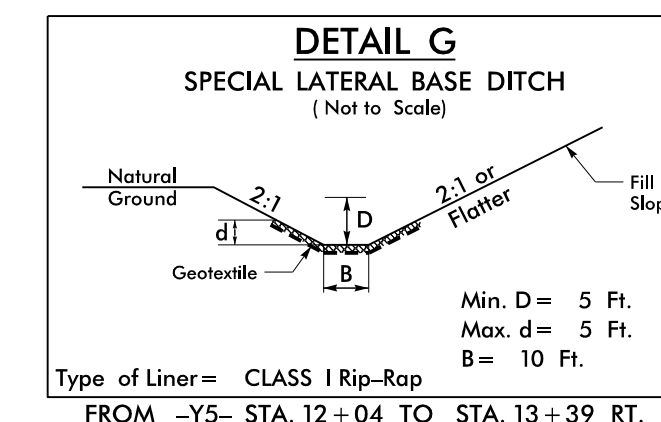

1. INSTALL PROPOSED EROSION CONTROL MEASURES
2. INSTALL SPECIAL STILLING BASIN FOR PUMPED EFFLUENT
3. INSTALL 2@36" TEMPORARY FLEXIBLE PIPES
4. CONSTRUCT IMPERVIOUS DIKES
5. REMOVE EXISTING CULVERT
6. CONSTRUCT CHANNEL IMPROVEMENTS INCLUDING ROCK CROSS VANE.
7. PLACE COIR FIBER MATTING ON CONSTRUCTED CHANNEL BANKS
8. REMOVE 2 LF OF 12" CMP NEAR INLET OF EXISTING CULVERT.
9. REMOVE IMPERVIOUS DIKES, REMOVE 36" TEMPORARY FLEXIBLE PIPES AND SPECIAL STILLING BASIN
10. COMPLETE ROADWAY IMPROVEMENTS

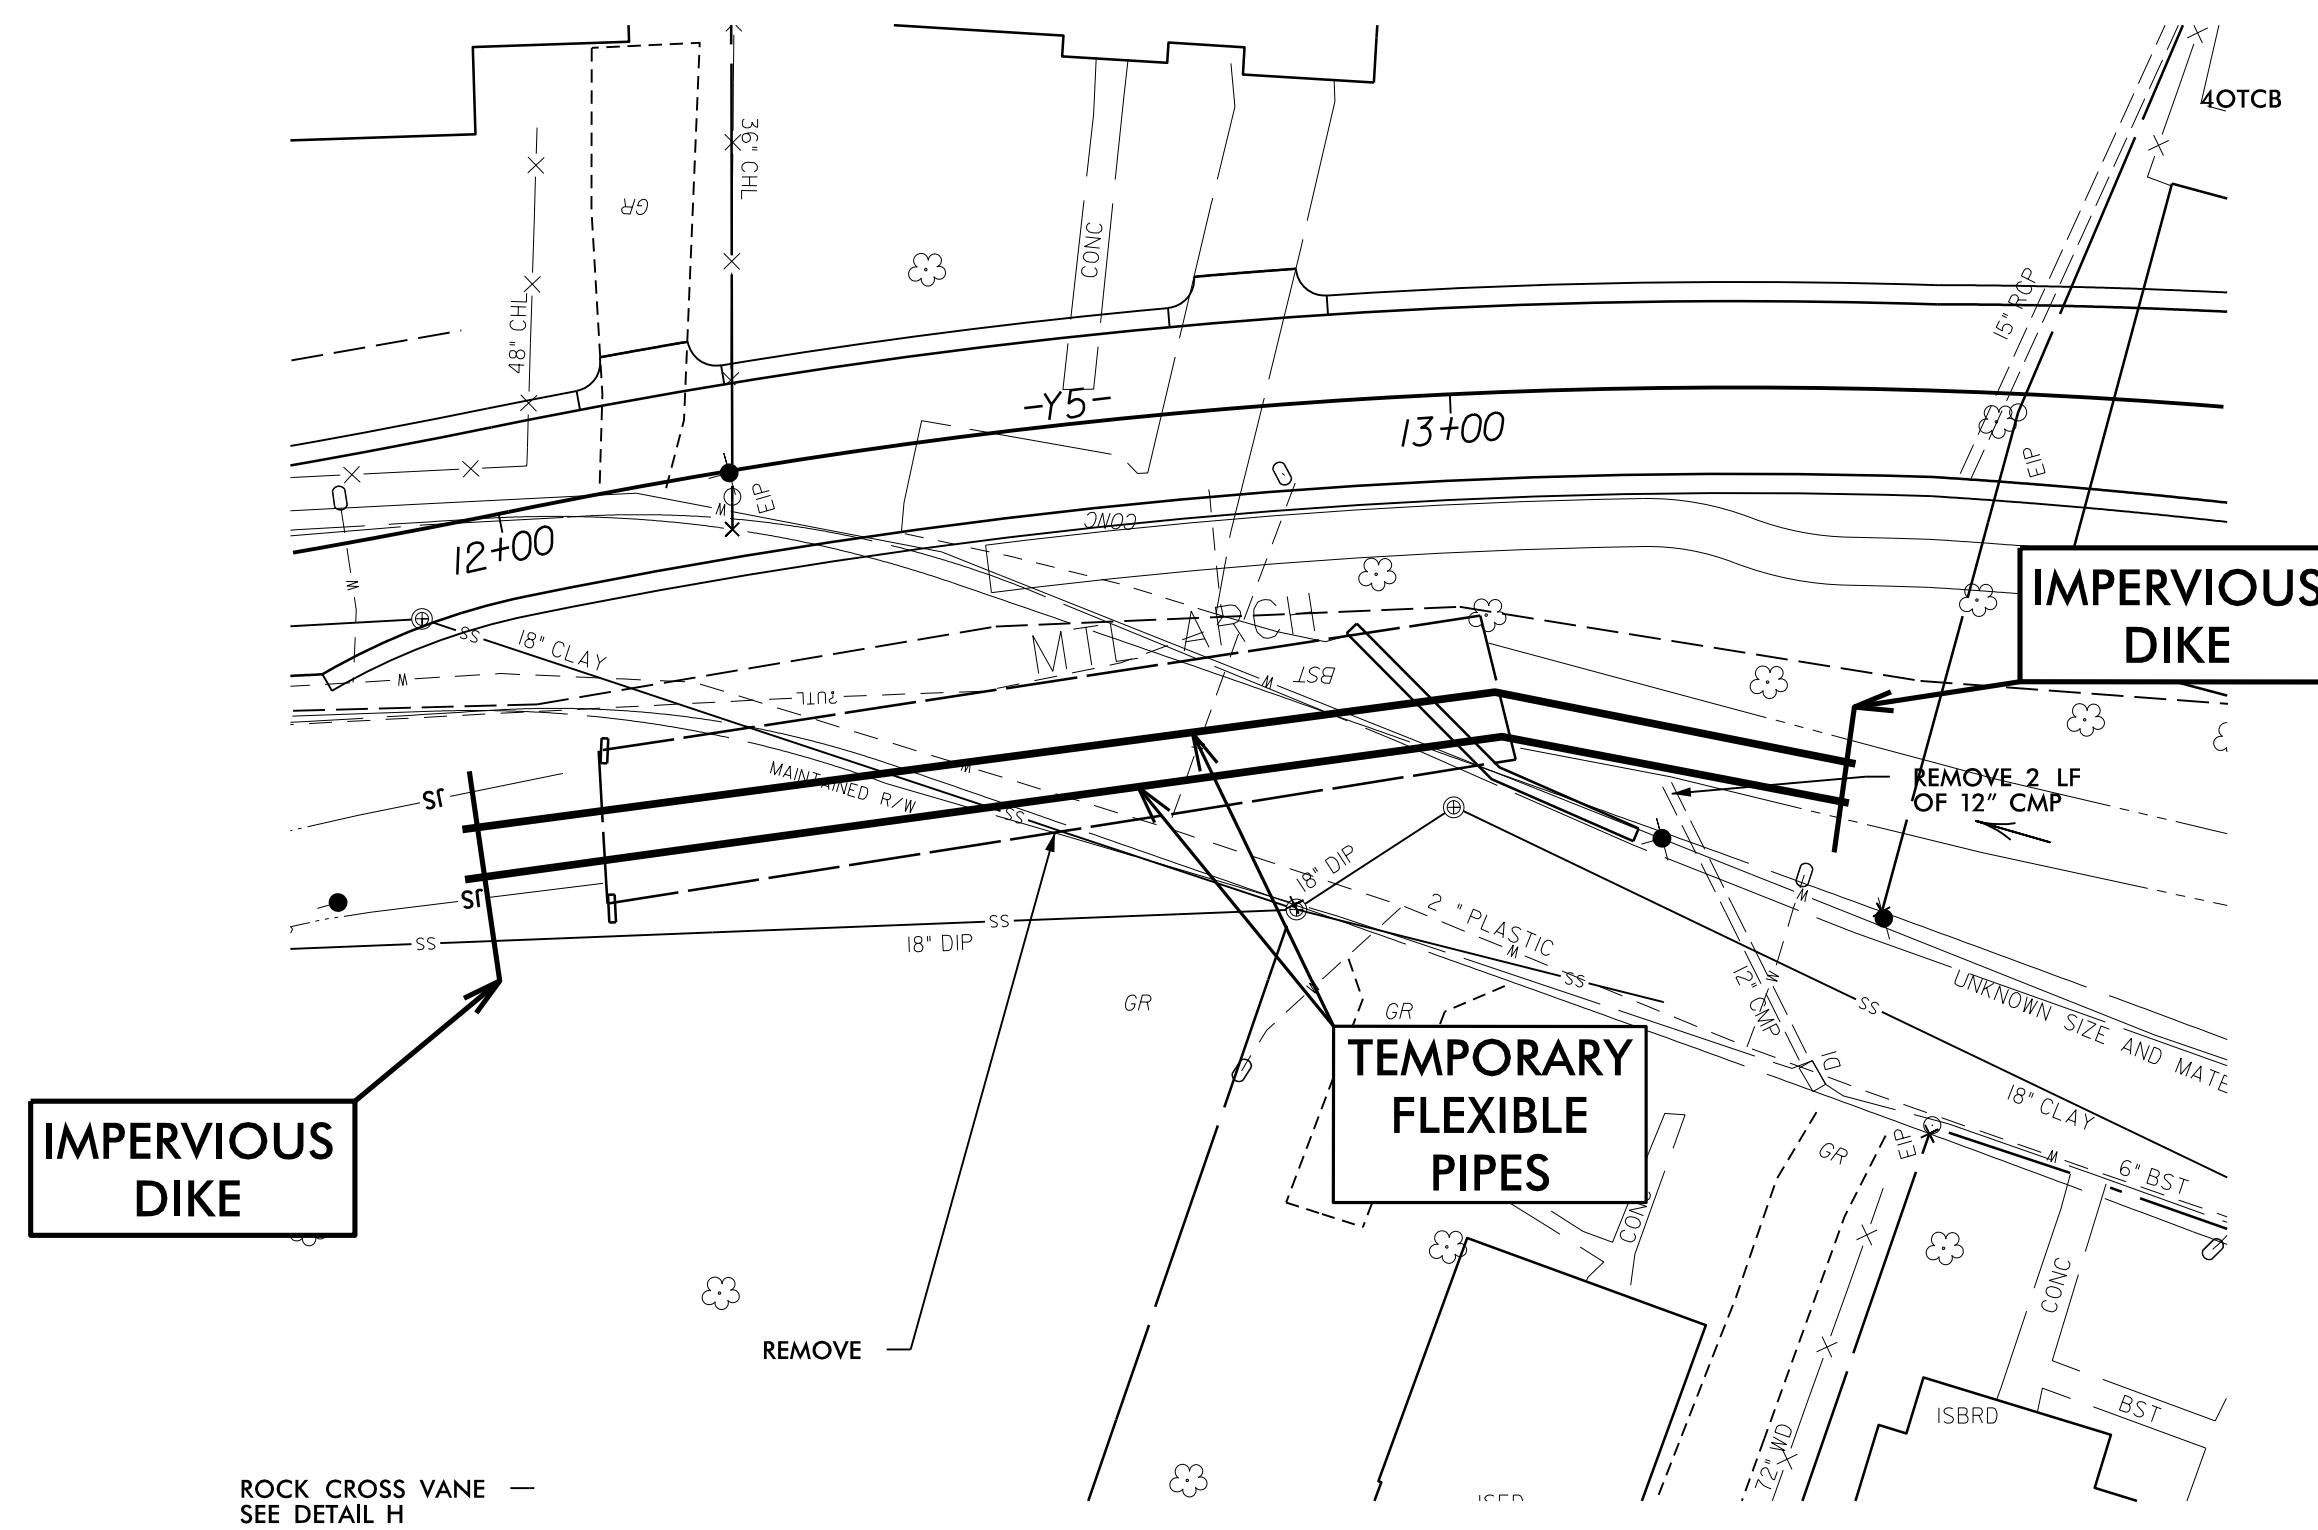

SYSTEMS
 CONSTRUCTION
 DIVISION
 5/14/99