



PHASE 1 STEP 1A

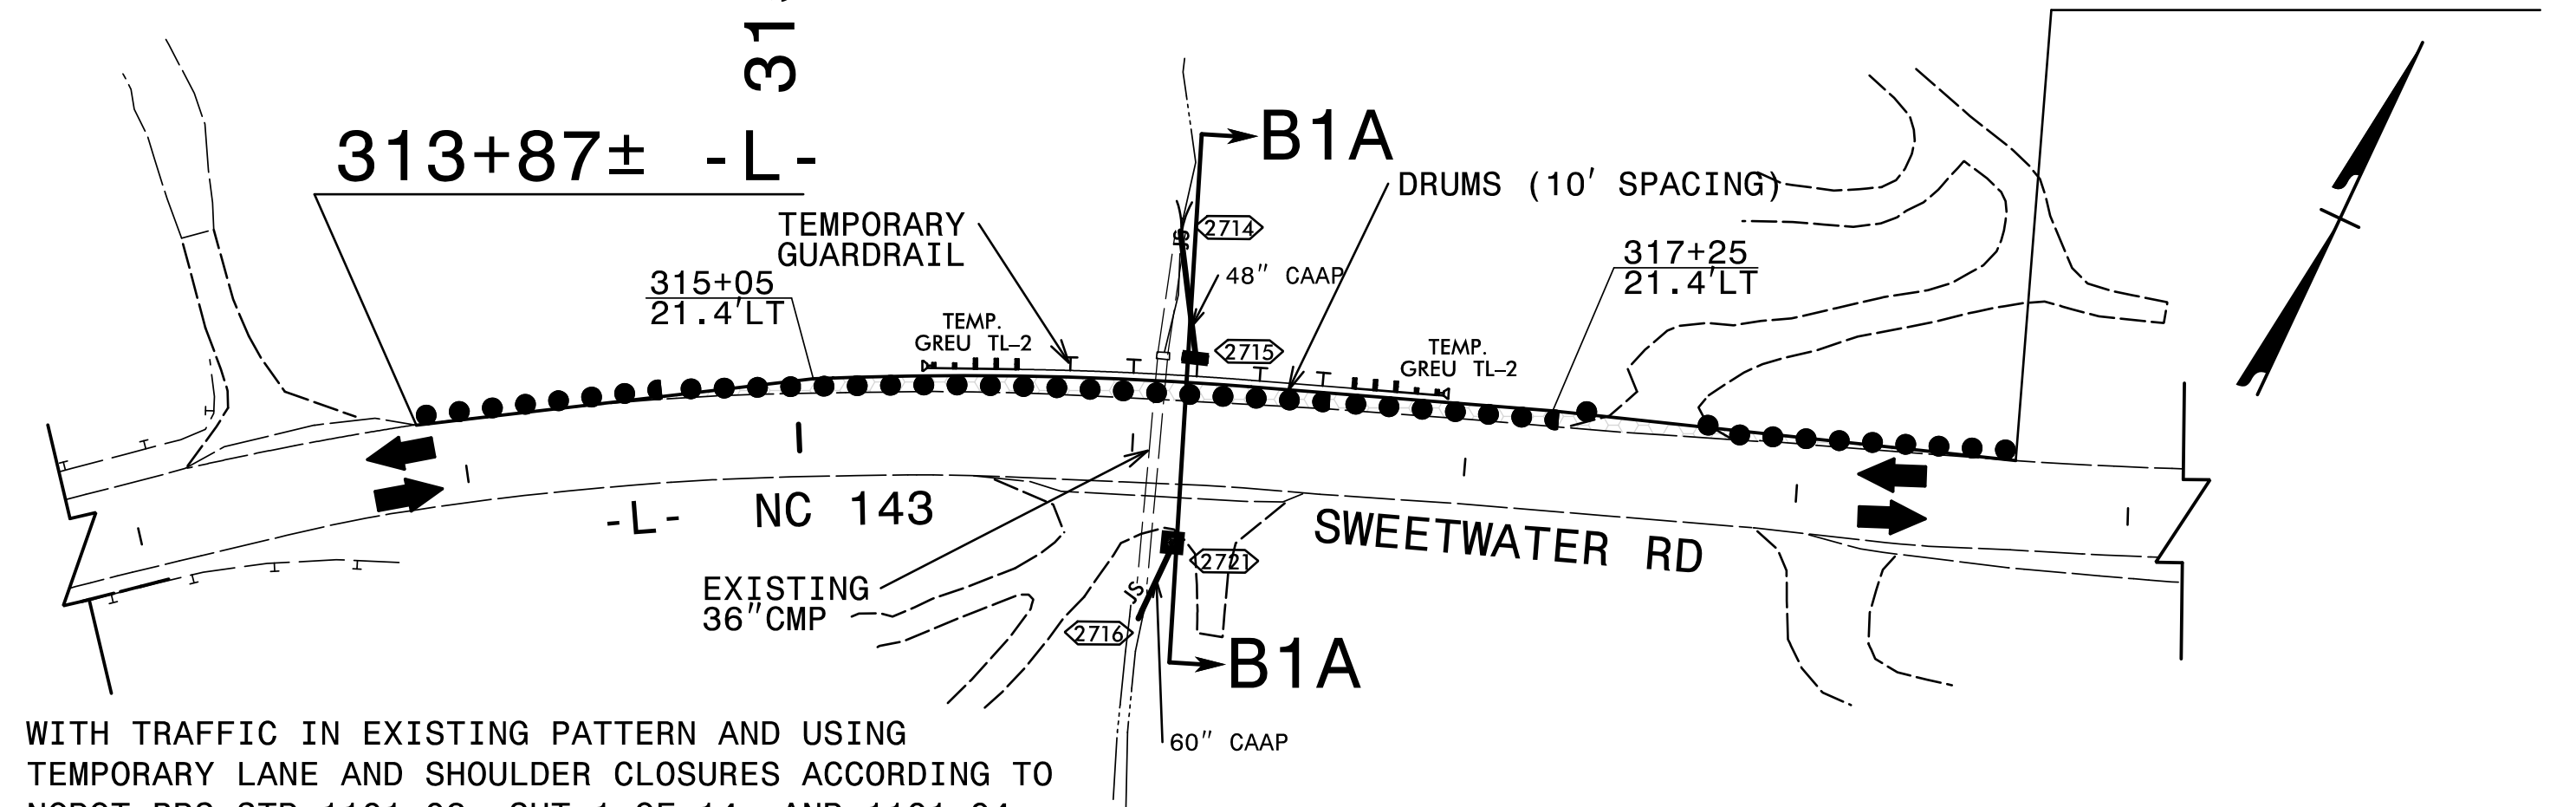


WITH TRAFFIC IN EXISTING PATTERN AND USING TEMPORARY LANE AND SHOULDER CLOSURES ACCORDING TO NCDOT RDS STD 1101.02, SHT 1 OF 14, AND 1101.04 PLACE PROPOSED DRAINAGE STRUCTURES 2715 TO 2714 AND 2716 TO 2721. PLACE TEMPORARY PAVEMENT AS SHOWN ON PLAN. PLACE TEMPORARY GUARDRAIL

SEE EROSION CONTROL PLANS FOR PIPE CONSTRUCTION SEQUENCE.

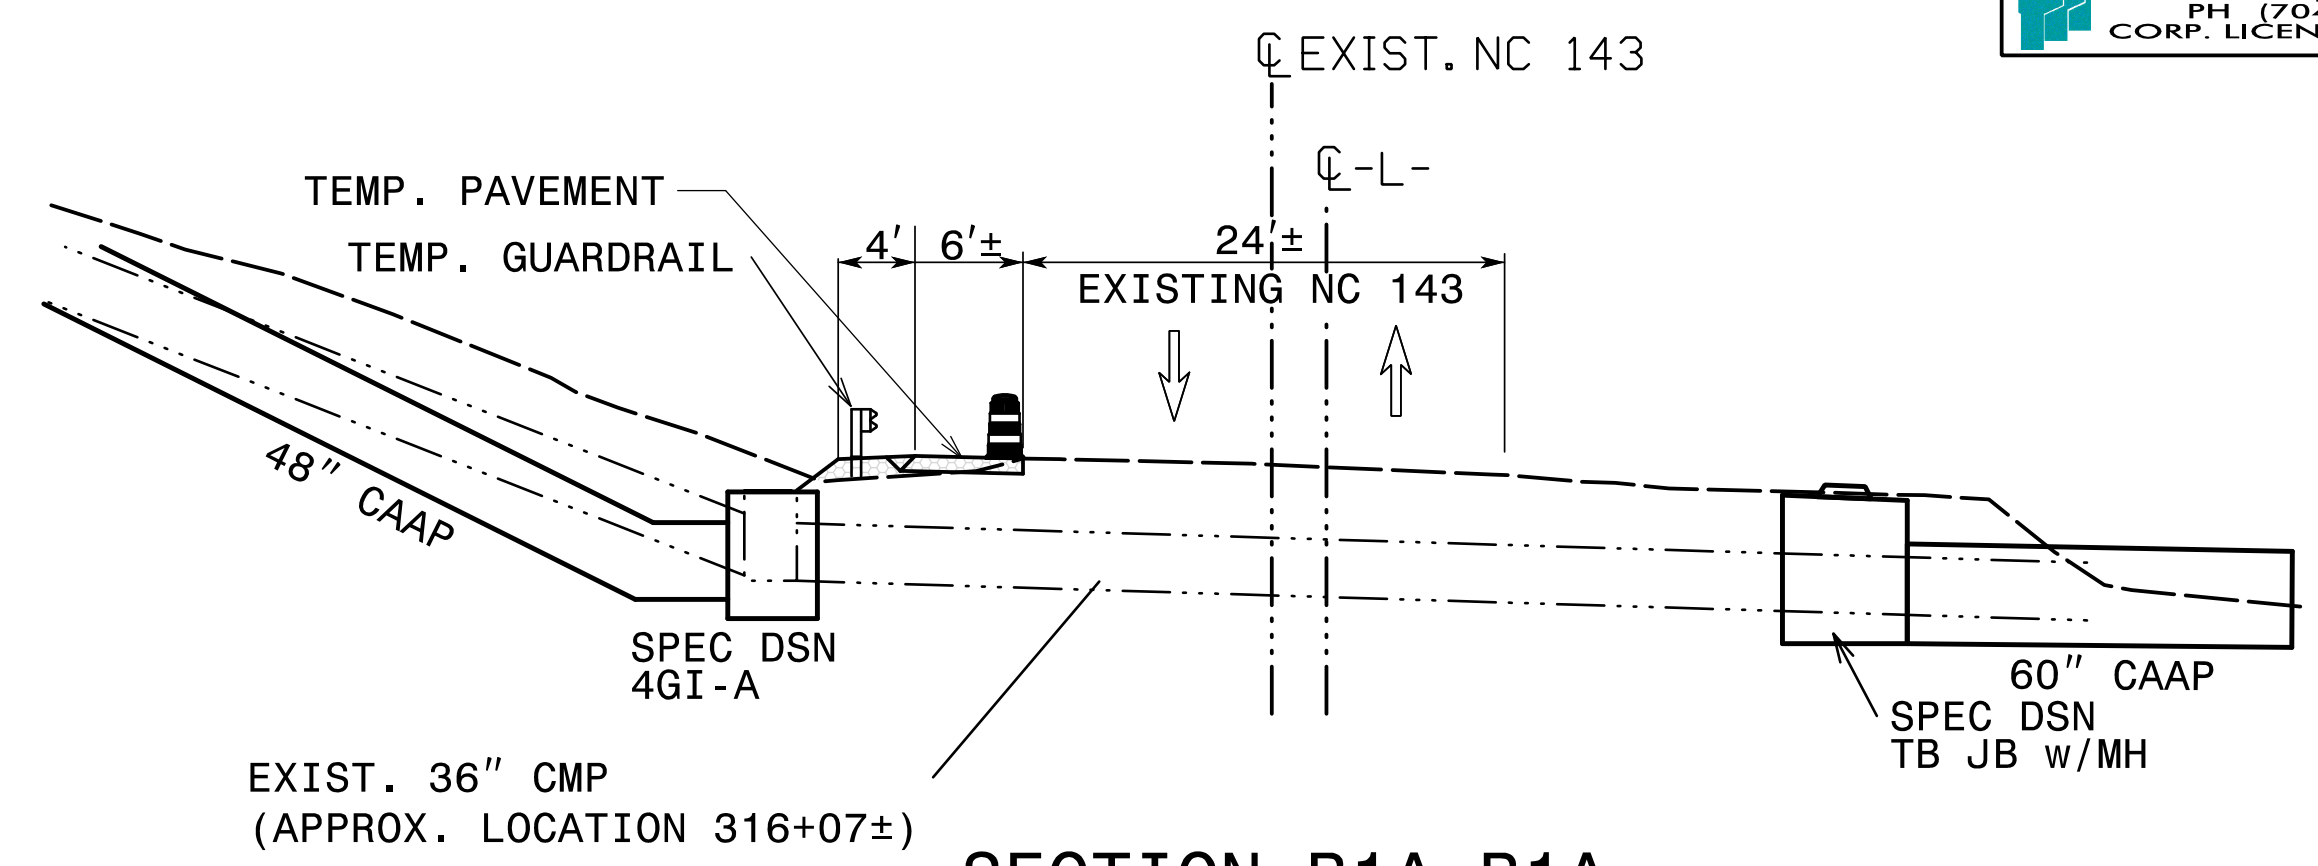


SECTION B1A-B1A
-L- STA 316+15±

PHASE 1 STEP 1B

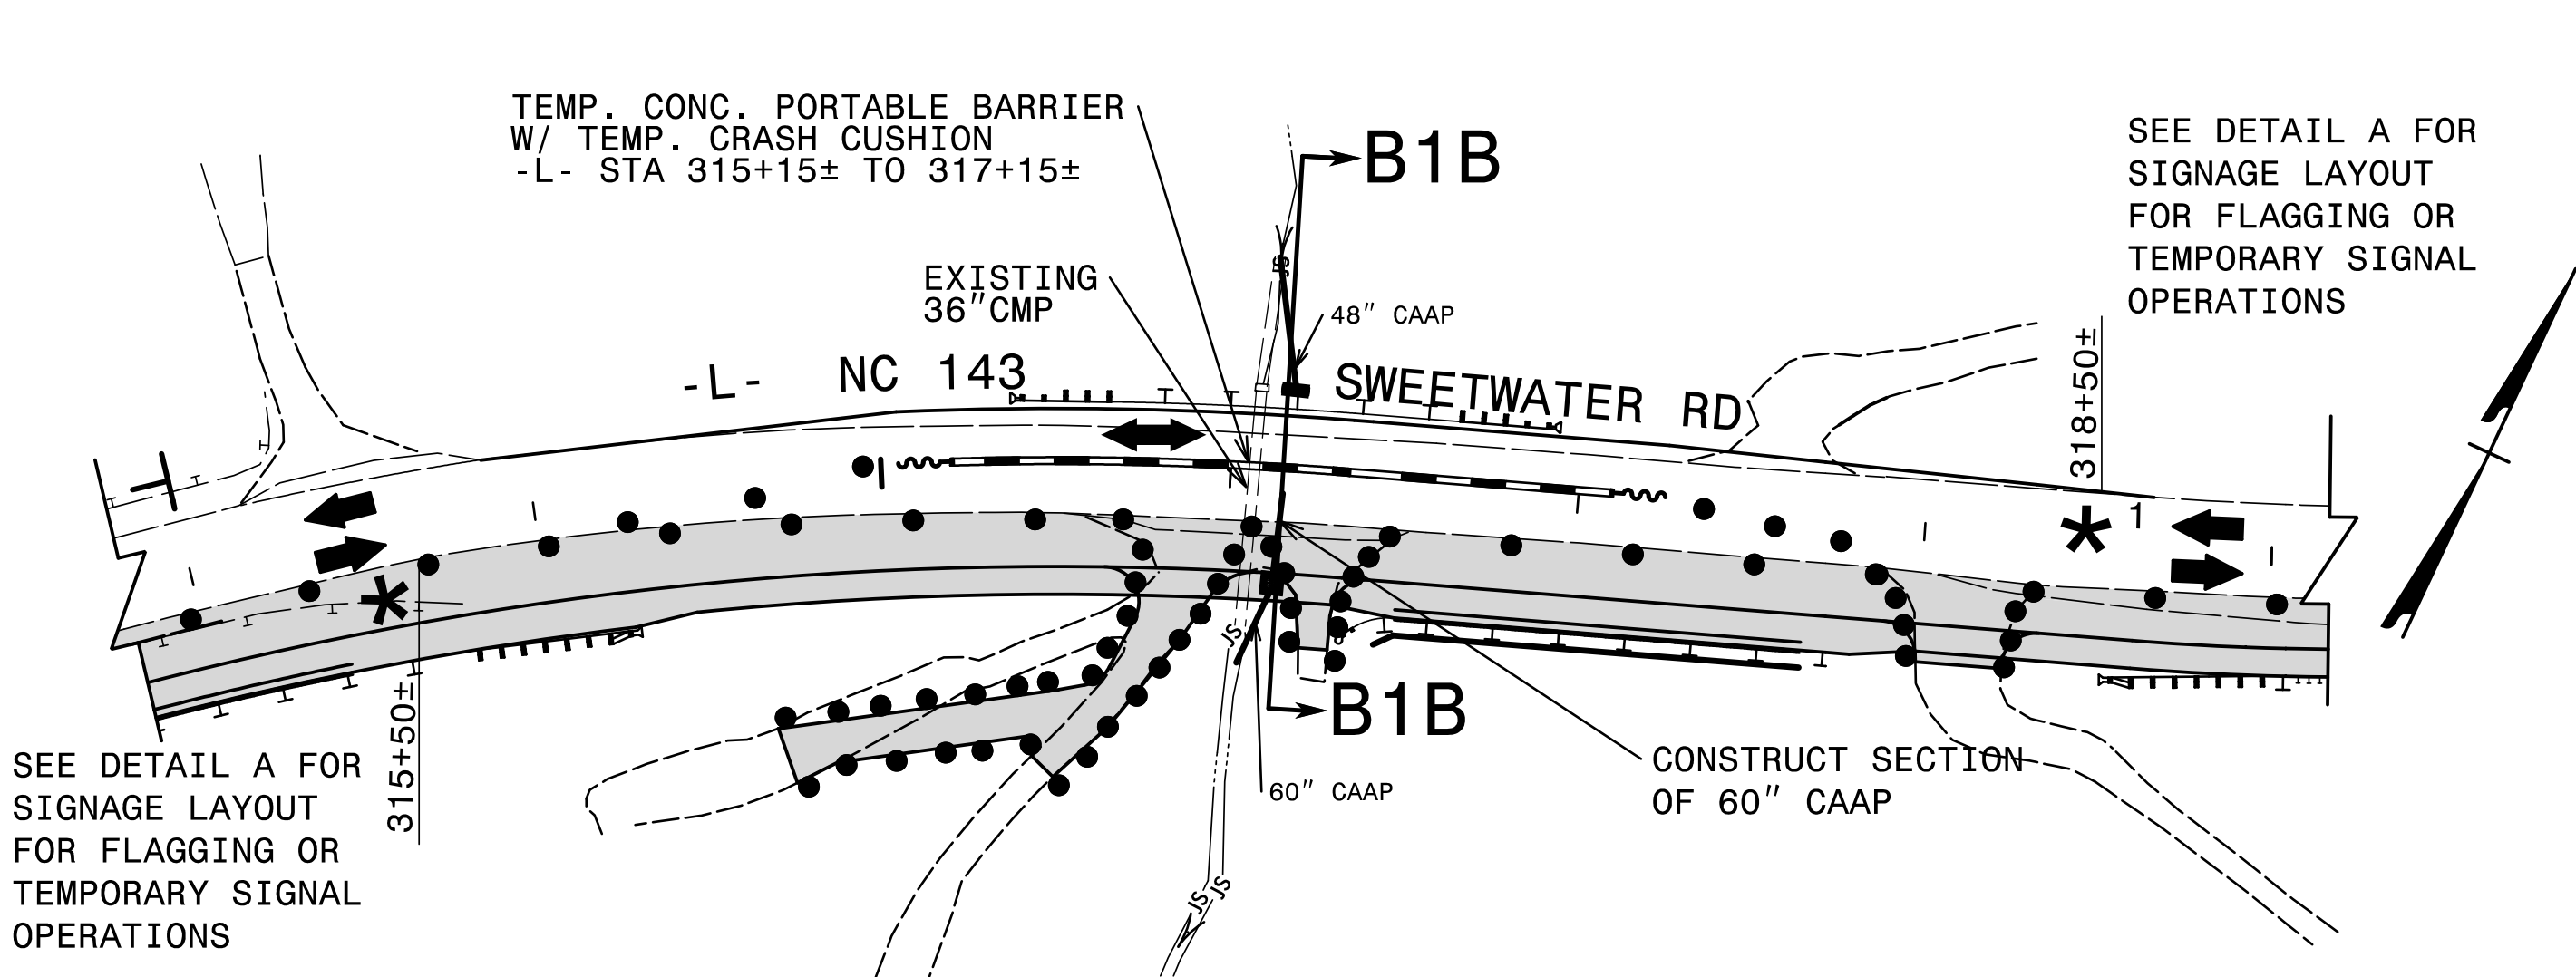

SEE DETAIL A FOR SIGNAGE LAYOUT FOR FLAGGING OR TEMPORARY SIGNAL OPERATIONS

SEE DETAIL A FOR SIGNAGE LAYOUT FOR FLAGGING OR TEMPORARY SIGNAL OPERATIONS

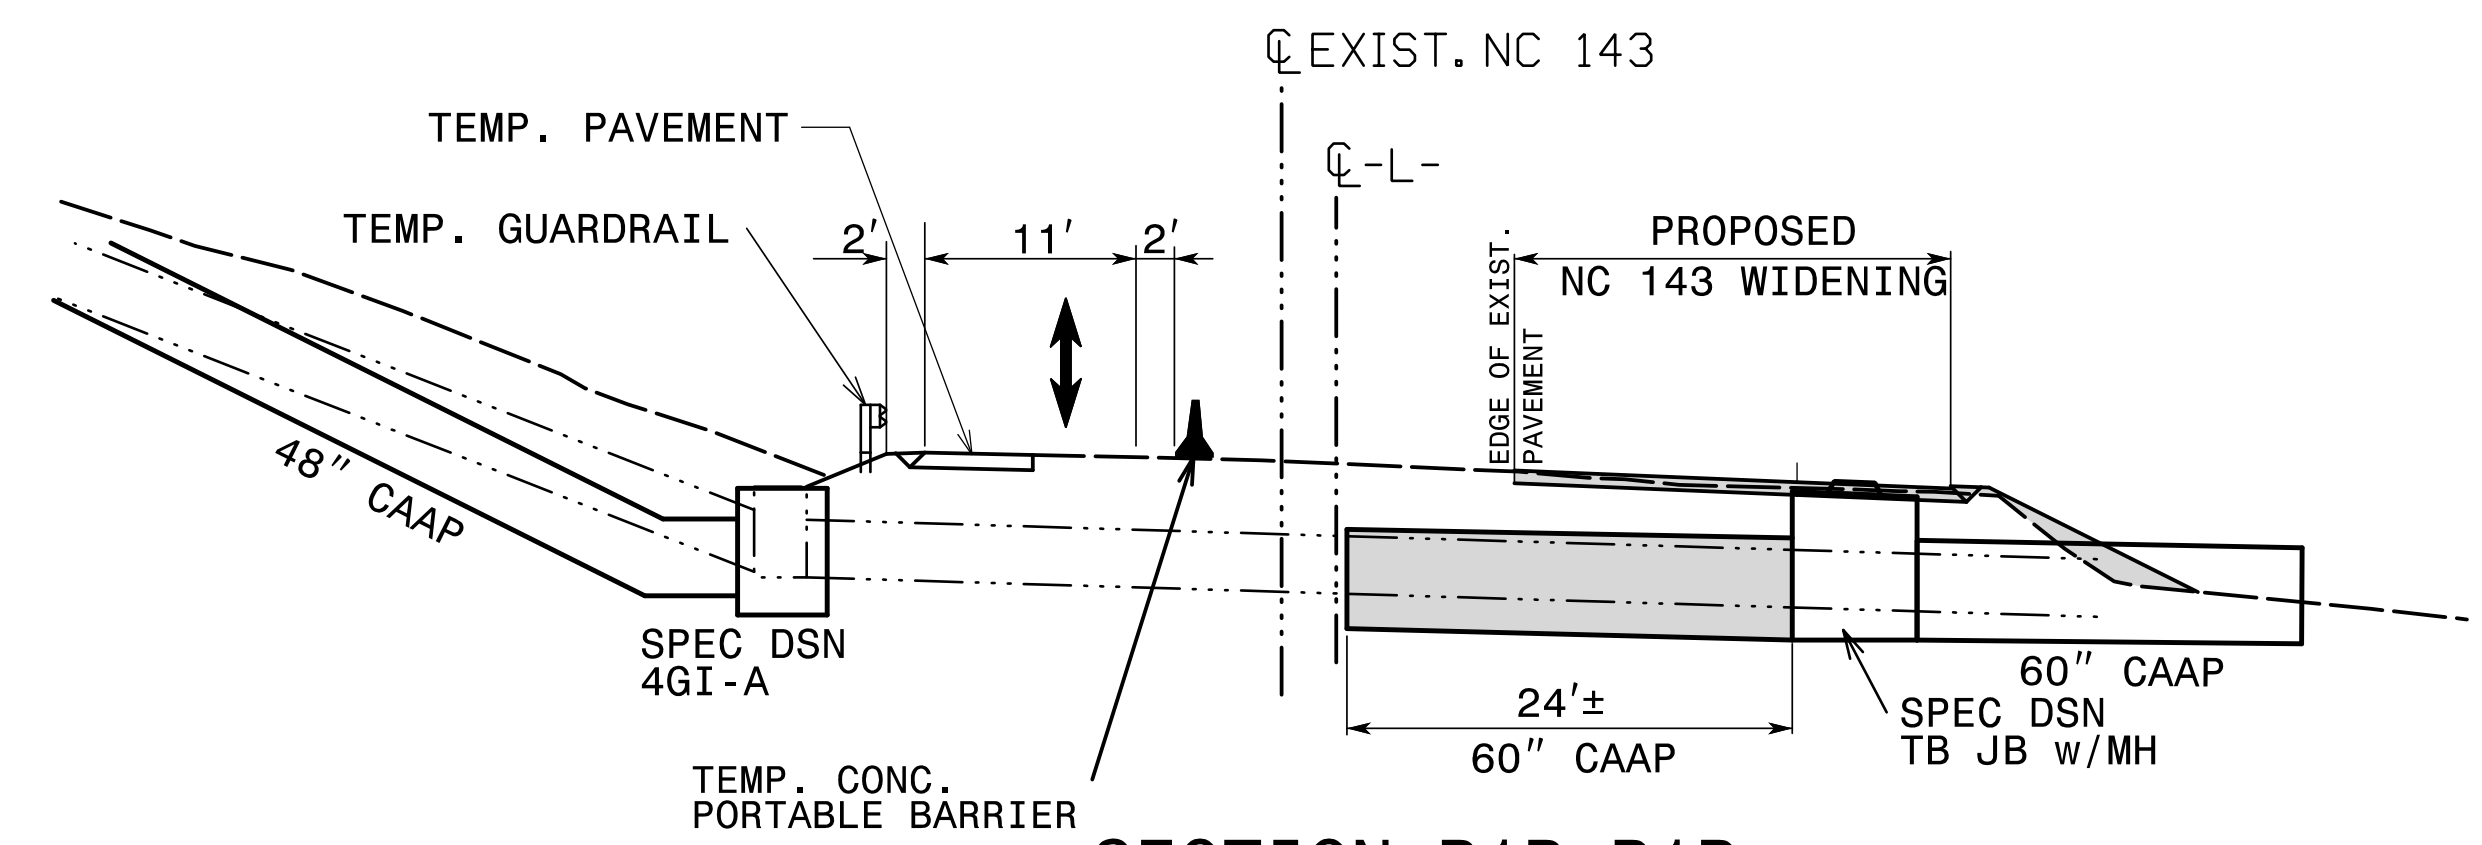

SECTION B1B-B1B
-L- STA 316+15±


UTILIZING THE TEMPORARY PAVEMENT AND FLAGGERS PLACE TRAFFIC ONTO A ONE LANE DETOUR AS SHOWN ON PLANS TO LAY FIRST SECTION OF 60\"/>

SEE EROSION CONTROL PLANS FOR PIPE CONSTRUCTION SEQUENCE.

AFTER COMPLETION OF PIPE INSTALLMENT RETURN TRAFFIC TO EXISTING PATTERN AND USING TEMPORARY LANE CLOSURES IF NEEDED COMPLETE NC 143 WIDENING UP TO BUT NOT INCLUDING THE FINAL LAYER OF SURFACE COURSE AS SHOWN ON SHEET TMP-8

DETAIL A

MIRROR LAYOUT FOR * 1

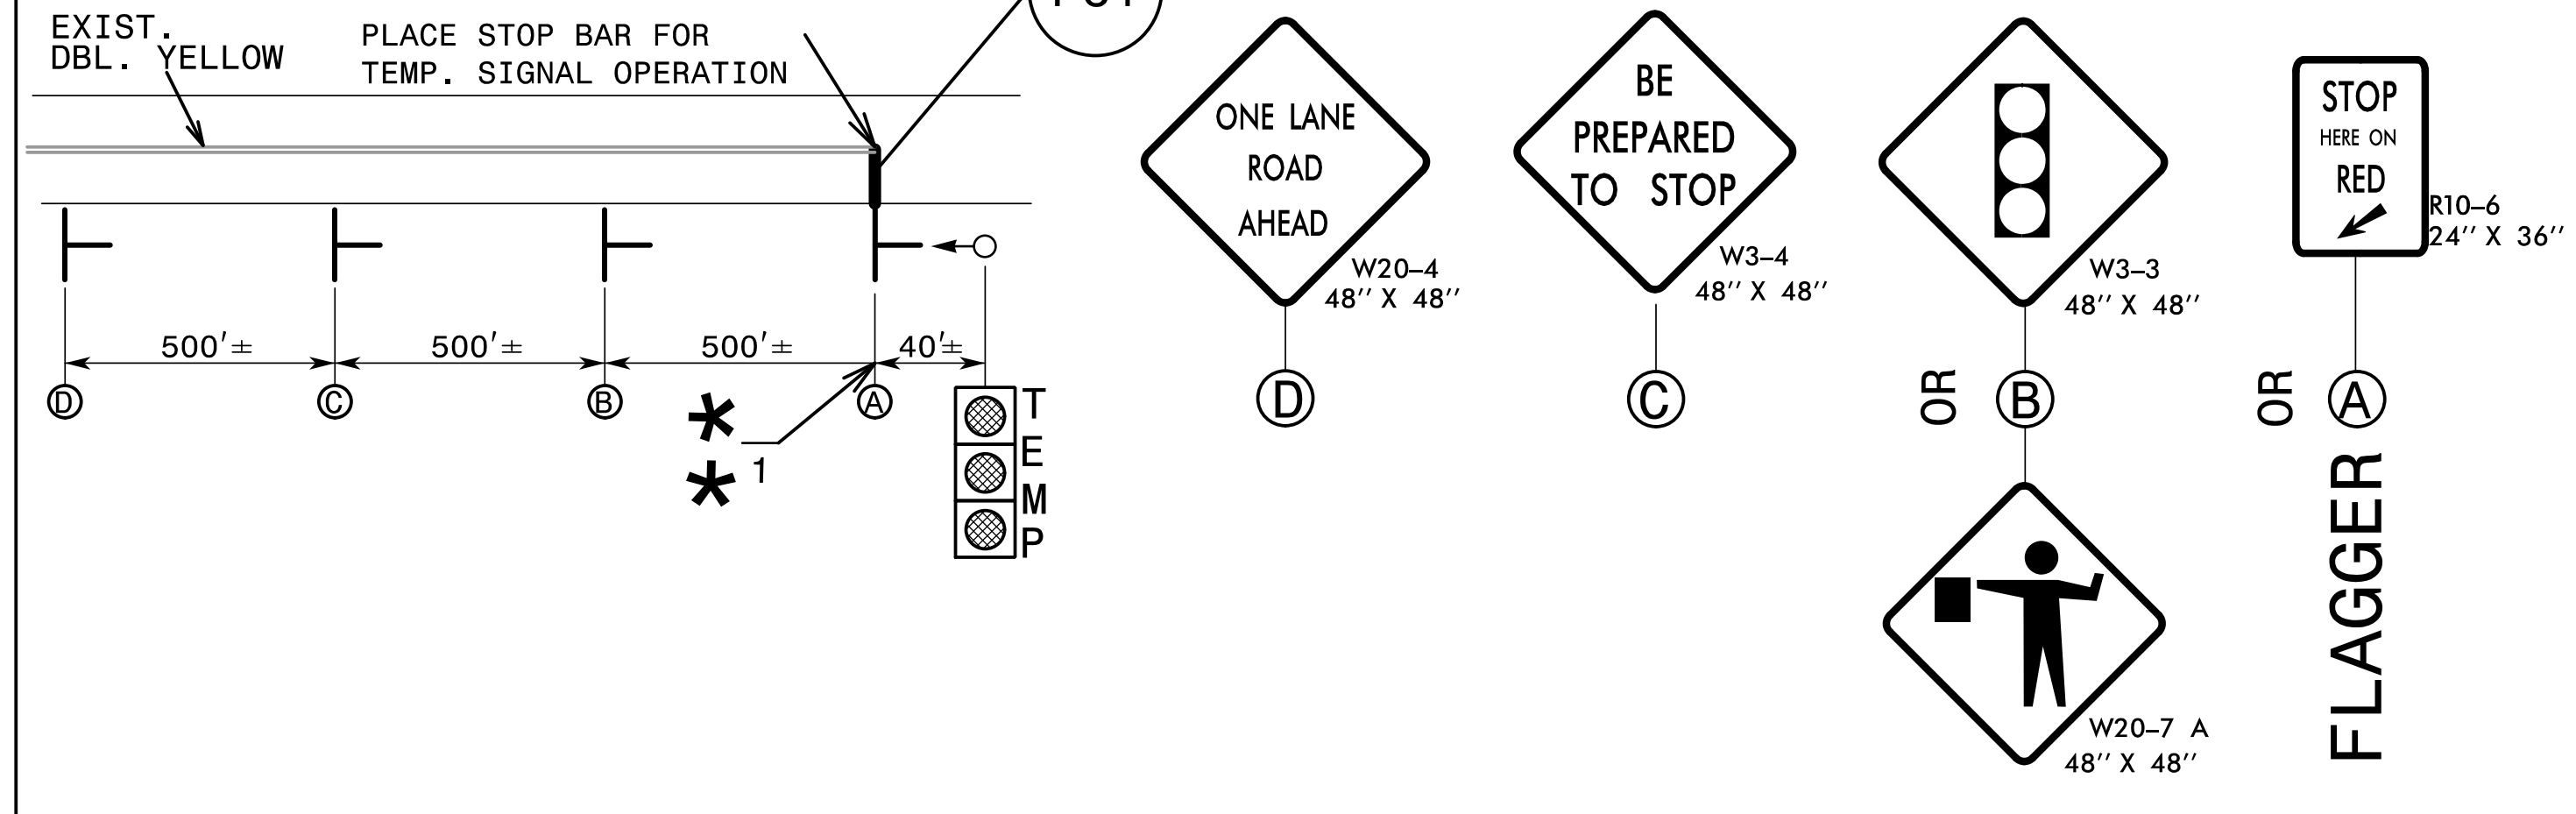


PROPOSED CONSTRUCTION
 TEMPORARY PAVEMENT



THE CONTRACTOR SHALL COMPLETE ALL WORK REQUIRED TO CONSTRUCT THE 60\"/>

PERMANENT VEGETATION SEEDING OF SLOPES SHALL BE COMPLETED PRIOR TO THE COMPLETION OF THE INTERMEDIATE CONTRACT TIME.

SEE INTERMEDIATE CONTRACT AND LIQUIDATED DAMAGES.

APPROVED: 
 DATE: 7/27/2022

SEAL

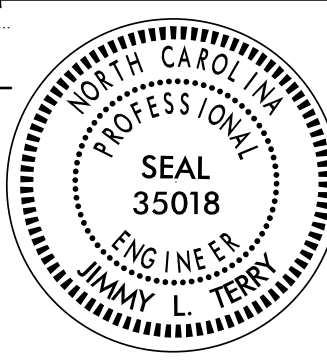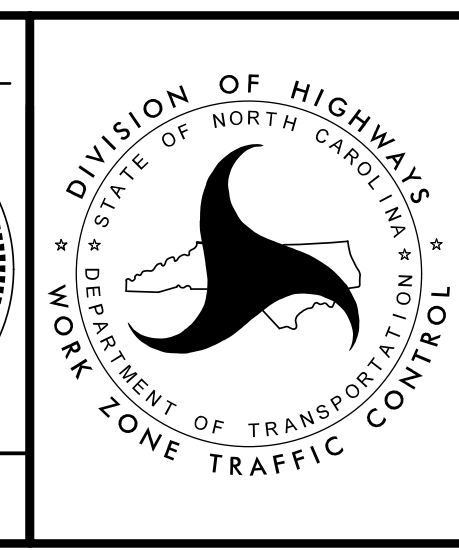**PHASE I
DETAIL
NC 143**

**DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED**

7/26/2022
 V:\NC09CB\0009\Traffic\TrafficControl\TCP\A-0009CB\A-0009CB-TC_TMP_13(PHL_Detail).dgn
 User: jsmelvin