| PROJECT REFERENCE NO. | SHEET NO. |
|---|---|
| U-3628 | SIGN-3A |

APPROVED: DocuSigned by: David T Sears 0691B3F28E5741E...

DATE: 7/3/2025

SEAL

NORTH CAROLINA PROFESSIONAL SEAL 044558 ENGINEER DAVID T. SEARS

**DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED**

SIGN NUMBER: 305
TYPE: D
QUANTITY: 1
SIGN WIDTH: 7'-0"
HEIGHT: 2'-6"
TOTAL AREA: 17.5 Sq.Ft.
BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 0.75"
RADII: 3"
NO. Z BARS:
LENGTH:

BACKG COLOR: Green
COPY COLOR: White

| SYMBOL | X | Y | WID | HT |
|---|---|---|---|---|
| AR_Type D | 7.9 | 10.5 | 6 | 9 |

MAT'L: 0.125" (3.2 mm) ALUMINUM

USE NOTES: 1,2

1. Legend and border(except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.
3. Shields; A, B, and C type arrows shall be on 0.032" (0.8mm) aluminum and demountable.

DESIGN BY: A. TUTT
PROJECT ID: U-3628

CHECKED BY: D. SEARS
LOCATION: OFFSITE

Sep 17, 2024
DIV: 8

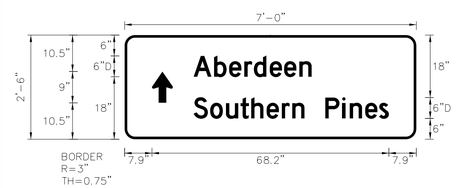


Spacing Factor is 1 unless specified otherwise

LETTER POSITIONS

Letter spacings are to start of next letter

| | | | | | | | | | | | | | | | | | | | | | | | | | | Series/Size Text Length |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | A | b | e | r | d | e | e | n | | | | | | | | | | | | | | | | | | D 2000 |
| 19.9 | 5.9 | 4.3 | 4.4 | 2.8 | 4.6 | 4.1 | 4.4 | 3.5 | 30.2 | | | | | | | | | | | | | | | | | 34 |
| | S | o | u | t | h | e | r | n | | P | i | n | e | s | | | | | | | | | | | | D 2000 |
| 19.9 | 4.7 | 4.6 | 4.2 | 3.1 | 4.4 | 4.4 | 3 | 3.5 | 6 | 4.9 | 2.2 | 4.4 | 4 | 2.8 | 7.9 | | | | | | | | | | | 56.2 |

FILENAME: U-3628_SGN_DESIGNS

NORTH CAROLINA D.O.T. SIGN DETAIL


RK&K
P: (919) 878-9560
8601 Six Forks Road, Forum 1,Suite 700
Raleigh, North Carolina 27615-3960
NC License No. F-0112
Engineers | Construction Managers | Planners | Scientists
www.rkk.com
Responsive People | Creative Solutions


06/12/25
U-3628_SGN_DESIGN_PSH03.dgn
Atutt

# SIGN DESIGNS