TIP NO.	SHEET NO.
I-0914BB	SIGN-3E

APPROVED: DocuSigned by: Charles A. Johnson, III 59A1565B47F54A6...

DATE: 11/3/2014

SEAL

NORTH CAROLINA PROFESSIONAL SEAL 20675 ENGINEER CHARLES A. JOHNSON III

SIGN NUMBER: 126B
TYPE: A
QUANTITY: 1
SIGN WIDTH: 13′-6″
HEIGHT: 15′-0″
TOTAL AREA: 202.5 Sq.Ft.
BORDER TYPE: FLUSH
RECESS: 0″
WIDTH: 2″
RADII: 12″
NO. Z BARS: 6
LENGTH: 154.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
M1_4	24.7	99	36	36
M1_4	84.7	99	45	36

MAT'L: 0.125″ ALUMINUM

NOTES:

1. Legend and border shall be direct applied Grade C reflective sheeting.
2. Shields shall be Grade C refelctive sheeting on 0.032″ aluminum and demountable.
3. Background shall be Grade C reflective sheeting.

DESIGN BY: TRT
PROJECT ID: I-0914BB
CHECKED BY: ADK/CAJ
DIV: 05
DATE: June 2014

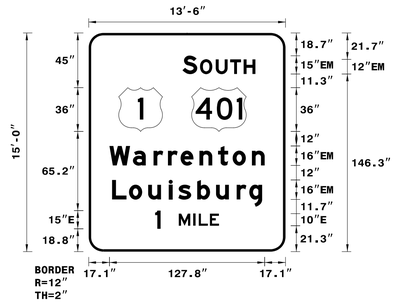

Spacing Factor is 1 unless specified otherwise

LETTER POSITIONS

Letter spacings are to start of next letter

																														Series/Size Text Length
	S		O	U	T	H																								EM 2000
77.2	12.1	2.3	13	11.9	11	9.7	24.7																							60.1
	W	a	r	r	e	n	t	o	n																					EM 2000
17.1	19.4	17	11.8	10.4	15.5	15.4	12	15.8	10.6	17.1																				127.8
	L	o	u	i	s	b	u	r	g																					EM 2000
19.2	13.9	15.8	17	7.8	15.5	15.5	17	10.4	10.6	19.2																				123.5
	1		M	I	L	E																								E 2000
54.7	4.5	15	12	4.4	9.2	7.5	54.7																							52.6

SIGN NUMBER: 127
TYPE: A
QUANTITY: 1
SIGN WIDTH: 17′-6″
HEIGHT: 7′-0″
TOTAL AREA: 122.5 Sq.Ft.
BORDER TYPE: FLUSH
RECESS: 0″
WIDTH: 2″
RADII: 12″
NO. Z BARS: 2
LENGTH: 202.0

BACKG COLOR: Brown / Brown
COPY COLOR: White

SYMBOL	X	Y	WID	HT

MAT'L: 0.125″ ALUMINUM

NOTES:

1. Legend and border shall be direct applied Grade C reflective sheeting.
2. Shields shall be Grade C refelctive sheeting on 0.032″ aluminum and demountable.
3. Background shall be Grade C reflective sheeting.

DESIGN BY: TRT
PROJECT ID: I-0914BB
CHECKED BY: ADK/CAJ
DIV: 05
DATE: June 2014

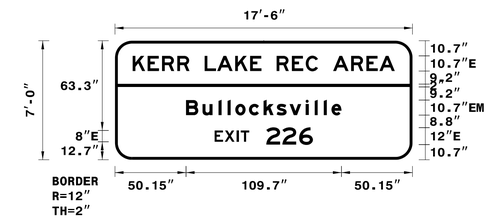

Spacing Factor is 1 unless specified otherwise

LETTER POSITIONS

Letter spacings are to start of next letter

																														Series/Size Text Length
	K	E	R	R		L	A	K	E		R	E	C		A	R	E	A												E 2000
12.5	10.6	10.1	10.8	8.6	10.7	8.9	12.7	10.6	8	10.7	10.8	9.8	8.6	10.7	12.7	10.8	9.2	10.9	12.5											185
	B	u	l	l	o	c	k	s	v	i	l	l	e																	EM 2000
50.2	11.6	11.3	6.4	5.4	9.6	10.3	9.2	9.2	11.3	6.4	6.4	5.4	7	50.2																109.7
	E	X	I	T		2	2	6																						E 2000
70.3	7.1	8.6	2.8	6	12	11.4	11.8	9.7	70.3																					69.4

SIGN NUMBER: 128
TYPE: A
QUANTITY: 1
SIGN WIDTH: 17′-6″
HEIGHT: 8′-6″
TOTAL AREA: 148.8 Sq.Ft.
BORDER TYPE: FLUSH
RECESS: 0″
WIDTH: 2″
RADII: 12″
NO. Z BARS: 3
LENGTH: 202.0

BACKG COLOR: Brown / Brown
COPY COLOR: White

SYMBOL	X	Y	WID	HT

MAT'L: 0.125″ ALUMINUM

NOTES:

1. Legend and border shall be direct applied Grade C reflective sheeting.
2. Shields shall be Grade C refelctive sheeting on 0.032″ aluminum and demountable.
3. Background shall be Grade C reflective sheeting.

DESIGN BY: TRT
PROJECT ID: I-0914BB
CHECKED BY: ADK/CAJ
DIV: 05
DATE: June 2014

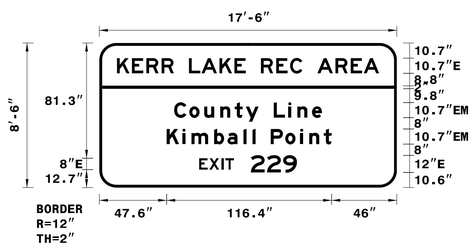

Spacing Factor is 1 unless specified otherwise

LETTER POSITIONS

Letter spacings are to start of next letter

																														Series/Size Text Length
	K	E	R	R		L	A	K	E		R	E	C		A	R	E	A												E 2000
12.5	10.6	10.1	10.8	8.6	10.7	8.9	12.7	10.6	8	10.7	10.8	9.8	8.6	10.7	12.7	10.8	9.2	10.9	12.5											185
	C	o	u	n	t	y		L	i	n	e																			EM 2000
52.8	10.7	10.6	11.3	10.2	7.8	9.1	10.7	10.2	6.4	10.3	7	52.8																		104.4
	K	i	m	b	a	l	l		P	o	i	n	t																	EM 2000
47.6	11.1	6.4	16	9.4	11.3	6.4	2.1	10.7	10.2	10.6	6.4	10.2	5.5	46																116.4
	E	X	I	T		2	2	9																						E 2000
70.5	7.1	8.6	2.8	6	12	11.4	11.4	9.7	70.5																					69

SIGN NUMBER: 129
TYPE: B
QUANTITY: 1
SIGN WIDTH: 8′-0″
HEIGHT: 4′-0″
TOTAL AREA: 32.0 Sq.Ft.
BORDER TYPE: FLUSH
RECESS: 0″
WIDTH: 0.75″
RADII: 3″
NO. Z BARS: 2
LENGTH: 88.0

BACKG COLOR: Brown
COPY COLOR: White

SYMBOL	X	Y	WID	HT
TYPE D ARROW	73.1	12.4	9	6

MAT'L: 0.125″ ALUMINUM

NOTES:

1. Legend and border shall be direct applied Grade C reflective sheeting.
2. Background shall be Grade C reflective sheeting.

DESIGN BY: TRT
PROJECT ID: I-0914BB
CHECKED BY: ADK/CAJ
DIV: 05
DATE: June 2014

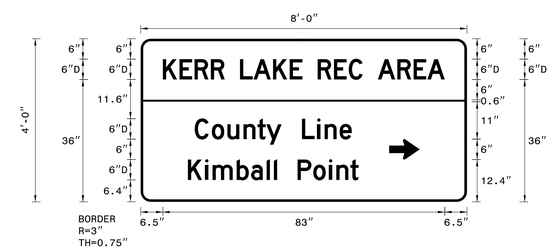

Spacing Factor is 1 unless specified otherwise
Spacing Factor for "KERR LAKE REC AREA" is 0.7

LETTER POSITIONS

Letter spacings are to start of next letter

																														Series/Size Text Length
	K	E	R	R		L	A	K	E		R	E	C		A	R	E	A												D 2000
6.5	4.9	4.4	4.8	4.1	4.5	4	5.7	4.9	3.7	4.5	4.8	4.3	4.1	4.5	5.7	4.8	4.1	5.1	6.5											83
	C	o	u	n	t	y		L	i	n	e																			D 2000
15.9	5	4.6	4.7	4.1	2.6	4.5	6	4.5	2.2	4.4	3.5	33.9																		46.2
	K	i	m	b	a	l	l		P	o	i	n	t																	D 2000
13.9	5.1	2.2	7.1	4.3	4.6	2.2	1	6	4.6	4.6	2.2	4.1	2.4	31.9																50.2

HNTB
HNTB NORTH CAROLINA, P.C.
343 E. Six Forks Road, Suite 200
Raleigh, North Carolina 27609
NC License No: C-1554

SIGN DESIGNS