


EDI MODEL 2018EClip-NC CONFLICT MONITOR PROGRAMMING DETAIL
(remove jumpers and set switches as shown)



REMOVE DIODE JUMPERS 2-5, 2-6, 2-11, 2-13, 2-15, 5-11, 5-13, 6-11, 6-13, 6-15, 8-16, 11-13, 11-15 and 13-15.

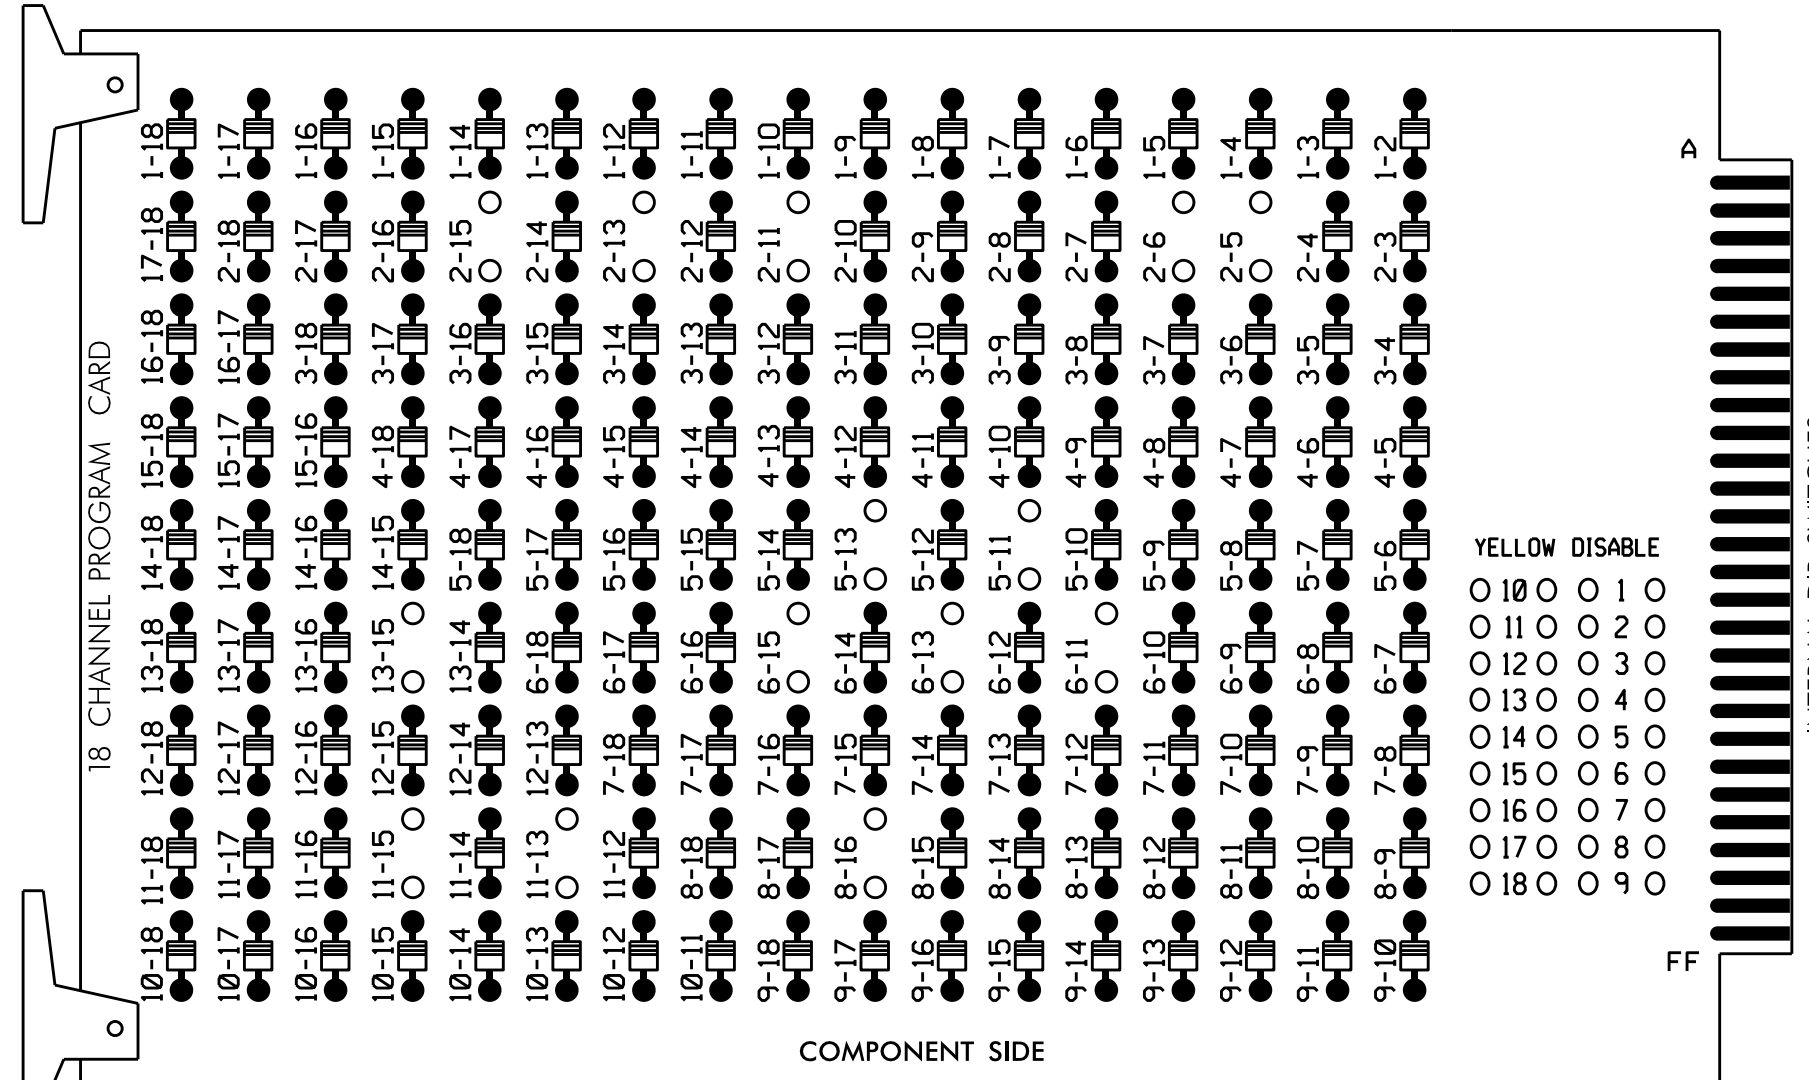

REMOVE JUMPERS AS SHOWN

NOTES:

1. Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
2. Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
3. Ensure that Red Enable is active at all times during normal operation.
4. Integrate monitor with Ethernet network in cabinet.

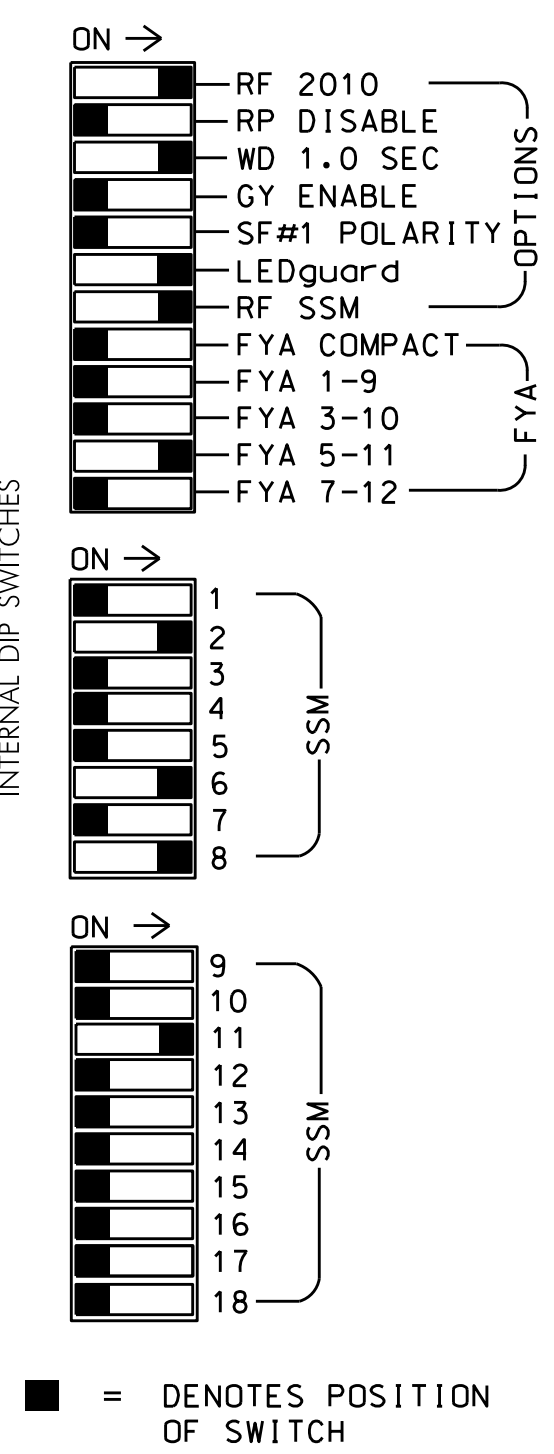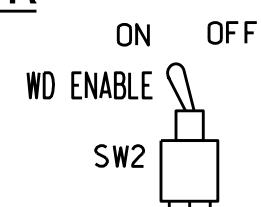

NOTES

1. To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
2. Enable Simultaneous Gap-Out for all phases.
3. Program phases 2 and 6 for Start Up In Green.
4. Program phases 2, 6 and 8 for 'STARTUP PED CALL'.
5. Program phases 2 and 6 for Yellow Flash.
6. The cabinet and controller are part of the High Point Signal System.

EQUIPMENT INFORMATION

CONTROLLER.....2070
 CABINET.....332 /W/ AUX
 SOFTWARE.....ECONOLITE OASIS
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...18 WITH AUX. OUTPUT FILE
 LOAD SWITCHES USED.....S2,S3,S7,S8,S9,S11,S12,AUX S4
 PHASES USED.....2,5,6,8
 OVERLAP "A".....NOT USED
 OVERLAP "B".....NOT USED
 OVERLAP "C".....5+6
 OVERLAP "D".....NOT USED

COUNTDOWN PEDESTRIAN SIGNAL OPERATION

Countdown Ped Signals are required to display timing only during Ped Clearance Interval. Consult Ped Signal Module user's manual for instructions on selecting this feature.

INPUT FILE POSITION LAYOUT

(front view)

FILE	1	2	3	4	5	6	7	8	9	10	11	12	13	14
U	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS
I	ISOLATOR	ISOLATOR	ISOLATOR	ISOLATOR	ISOLATOR	ISOLATOR	ISOLATOR	ISOLATOR	ISOLATOR	ISOLATOR	ISOLATOR	ISOLATOR	ISOLATOR	ISOLATOR
L	ST	ST	ST	ST	ST	ST	ST	ST	ST	ST	ST	ST	ST	ST
U	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS
I	ISOLATOR	ISOLATOR	ISOLATOR	ISOLATOR	ISOLATOR	ISOLATOR	ISOLATOR	ISOLATOR	ISOLATOR	ISOLATOR	ISOLATOR	ISOLATOR	ISOLATOR	ISOLATOR
L	ST	ST	ST	ST	ST	ST	ST	ST	ST	ST	ST	ST	ST	ST


EX.: 1A, 2A, ETC. = LOOP NO.'S

FS = FLASH SENSE
 ST = STOP TIME

INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	INPUT ASSIGNMENT NO.	DETECTOR NO.	NEMA PHASE	CALL	EXTEND	FULL TIME DELAY	STRETCH TIME	DELAY TIME
5A	TB3-1,2	J1U	55	17	5	5	Y	Y			15

INPUT FILE POSITION LEGEND: J2L

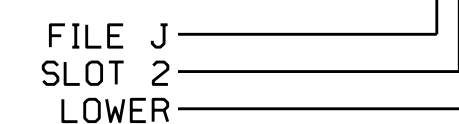

SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16	9	10	17	11	12	18
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED	OLA	OLB	SPARE	OLC	OLD	SPARE
SIGNAL HEAD NO.	NU	21,22	P21, P22	NU	NU	NU	51*	61,62	P61, P62	NU	81,82, 83,84	P81,P82, P83,P84	NU	NU	NU	51*	NU	NU
RED		128						134			107							
YELLOW		129					*	135			108							
GREEN		130						136			109							
RED ARROW																		A114
YELLOW ARROW																		A115
FLASHING YELLOW ARROW																		A116
GREEN ARROW								133										
Hand icon			113						119		110							
Person icon			115						121		112							


NU = Not Used

* Denotes install load resistor. See load resistor installation detail this sheet.

* See pictorial of head wiring in detail below.

4 SECTION FYA PPLT SIGNAL WIRING DETAIL

(wire signal head as shown)

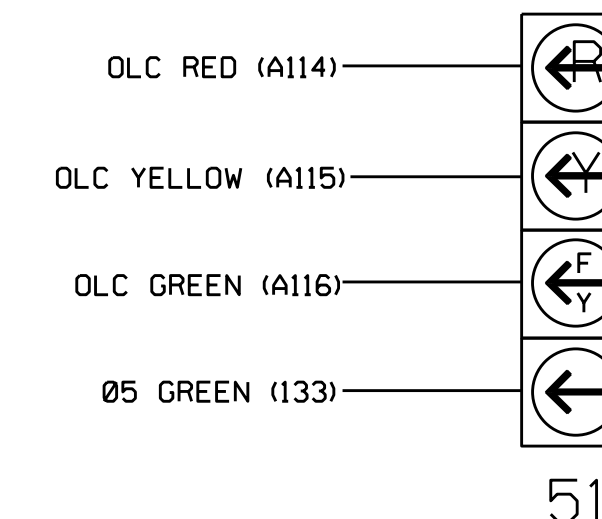


NOTE

1. The sequence display for this signal requires special logic programming. See sheet 2 of 2 for programming instructions.

LOAD RESISTOR INSTALLATION DETAIL

(install resistor as shown below)

ACCEPTABLE VALUES	
VALUE (ohms)	WATTAGE
1.5K - 1.9K	25W (min)
2.0K - 3.0K	10W (min)

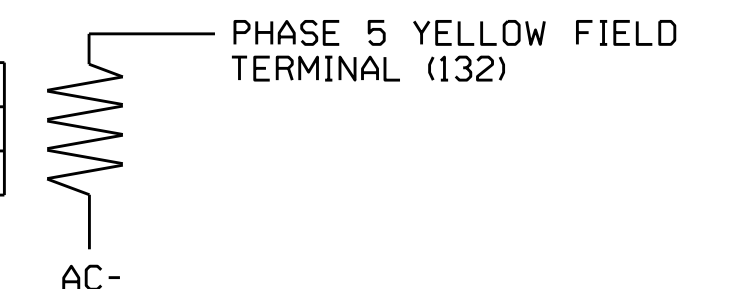

Electrical Detail - Sheet 1 of 2

ELECTRICAL AND PROGRAMMING DETAILS FOR: Prepared In the Offices of: 750 N. Greenfield Pkwy, Garner, NC 27529	SR 1009 (South Main Street) at SR 1300 (Green Drive)		SEAL GEORGE C. BROWN ENGINEER
	Division 7 PLAN DATE: December 2014 PREPARED BY: C. Strickland	Guilford County High Point REVIEWED BY: T. Joyce REVIEWED BY:	

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 07-0787
 DESIGNED: September 2014
 SEALED: 4/27/2015
 REVISED: N/A

30-Apr-2015 10:35
 S:\IT\SSM\TSS\Sigal\work\kg\cous5\g_Mon5\Fr\ck\and07087_sml_e.xxx.dgn
 C:\ST\CK\and