

LOAD FACTORS:

DESIGN LOAD RATING FACTORS	LIMIT STATE	γ_{DC}	γ_{DW}
	STRENGTH I	1.25	1.50
	SERVICE III	1.00	1.00

LOAD AND RESISTANCE FACTOR RATING (LRFR) SUMMARY FOR PRESTRESSED CONCRETE GIRDERS																								
LEVEL	VEHICLE	WEIGHT (W) (TONS)	CONTROLLING LOAD RATING #	MINIMUM RATING FACTORS (RF)	TONS = W x RF	STRENGTH I LIMIT STATE										SERVICE III LIMIT STATE						COMMENT NUMBER		
						LIVE-LOAD FACTORS (γ_{LL})	MOMENT					SHEAR					LIVE-LOAD FACTORS (γ_{LL})	MOMENT						
							DISTRIBUTION FACTORS (DF)	RATING FACTOR	SPAN	GIRDER LOCATION	DISTANCE FROM LEFT END OF SPAN (FF)	DISTRIBUTION FACTORS (DF)	RATING FACTOR	SPAN	GIRDER LOCATION	DISTANCE FROM LEFT END OF SPAN (FF)		DISTRIBUTION FACTORS (DF)	RATING FACTOR	SPAN	GIRDER LOCATION		DISTANCE FROM LEFT END OF SPAN (FF)	
DESIGN LOAD RATING	HL-93 (INVENTORY)	N/A	①	1.33	--	1.75	0.805	1.36	118.4'	ER	59.2	0.838	1.70	118.4'	I	28.6	0.80	0.805	1.33	118.4'	ER	59.2		
	HL-93 (OPERATING)	N/A		1.76	--	1.35	0.805	1.76	118.4'	ER	59.2	0.838	2.31	118.4'	I	28.6	N/A	--	--	--	--	--		
	HS-20 (INVENTORY)	36.000	②	1.94	69.750	1.75	0.805	1.97	118.4'	ER	59.2	0.838	2.41	118.4'	I	28.6	0.80	0.805	1.94	118.4'	ER	59.2		
	HS-20 (OPERATING)	36.000		2.56	92.020	1.35	0.805	2.56	118.4'	ER	59.2	0.838	3.13	118.4'	I	28.6	N/A	--	--	--	--	--		
LEGAL LOAD RATING	SINGLE VEHICLE (SV)	SN5H		4.68	63.113	1.40	0.805	5.99	118.4'	ER	59.2	0.838	7.41	118.4'	I	28.6	0.80	0.805	4.68	118.4'	ER	59.2		
		SNGARBS2	20.000		3.35	67.000	1.40	0.805	4.28	118.4'	ER	59.2	0.838	5.19	118.4'	I	28.6	0.80	0.805	3.35	118.4'	ER	59.2	
		SNAGRIS2	22.000		3.11	68.475	1.40	0.805	3.98	118.4'	ER	59.2	0.838	4.79	118.4'	I	28.6	0.80	0.805	3.11	118.4'	ER	59.2	
		SNCOTTS3	27.250		2.33	63.356	1.40	0.805	2.97	118.4'	ER	59.2	0.838	3.69	118.4'	I	28.6	0.80	0.805	2.33	118.4'	ER	59.2	
		SNAGGRS4	34.925		1.89	65.921	1.40	0.805	2.41	118.4'	ER	59.2	0.838	3.00	118.4'	I	28.6	0.80	0.805	1.89	118.4'	ER	59.2	
		SNS5A	35.550		1.85	65.768	1.40	0.805	2.36	118.4'	ER	59.2	0.838	3.01	118.4'	I	28.6	0.80	0.805	1.85	118.4'	ER	59.2	
		SNS6A	39.950		1.68	66.916	1.40	0.805	2.14	118.4'	ER	59.2	0.838	2.73	118.4'	I	28.6	0.80	0.805	1.68	118.4'	ER	59.2	
	SNS7B	42.000		1.60	67.200	1.40	0.805	2.04	118.4'	ER	59.2	0.838	2.66	118.4'	I	28.6	0.80	0.805	1.60	118.4'	ER	59.2		
	TRUCK TRACTOR SEMI-TRAILER (TTST)	TNAGRIT3	33.000		2.04	67.238	1.40	0.805	2.60	118.4'	ER	59.2	0.838	3.27	118.4'	I	28.6	0.80	0.805	2.04	118.4'	ER	59.2	
		TNT4A	33.075		2.04	67.390	1.40	0.805	2.61	118.4'	ER	59.2	0.838	3.21	118.4'	I	28.6	0.80	0.805	2.04	118.4'	ER	59.2	
		TNT6A	41.600		1.65	68.640	1.40	0.805	2.10	118.4'	ER	59.2	0.838	2.79	118.4'	I	28.6	0.80	0.805	1.65	118.4'	ER	59.2	
		TNT7A	42.000		1.65	69.300	1.40	0.805	2.10	118.4'	ER	59.2	0.838	2.73	118.4'	I	28.6	0.80	0.805	1.65	118.4'	ER	59.2	
		TNT7B	42.000		1.68	70.350	1.40	0.805	2.14	118.4'	ER	59.2	0.838	2.61	118.4'	I	28.6	0.80	0.805	1.68	118.4'	ER	59.2	
		TNAGRIT4	43.000		1.61	69.338	1.40	0.805	2.06	118.4'	ER	59.2	0.838	2.54	118.4'	I	28.6	0.80	0.805	1.61	118.4'	ER	59.2	
TNAGT5A		45.000		1.53	68.625	1.40	0.805	1.96	118.4'	ER	59.2	0.838	2.50	118.4'	I	28.6	0.80	0.805	1.53	118.4'	ER	59.2		
TNAGT5B	45.000	③	1.53	68.625	1.40	0.805	1.95	118.4'	ER	59.2	0.838	2.41	118.4'	I	28.6	0.80	0.805	1.53	118.4'	ER	59.2			

NOTES:
 MINIMUM RATING FACTORS ARE BASED ON THE STRENGTH I AND SERVICE III LIMIT STATES.
 ALLOWABLE STRESSES FOR SERVICE III LIMIT STATE ARE AS REQUIRED FOR DESIGN.

CONTROLLING LOAD RATING

① DESIGN LOAD RATING (HL-93)


② DESIGN LOAD RATING (HS-20)

③ LEGAL LOAD RATING **

** SEE CHART FOR VEHICLE TYPE

GIRDER LOCATION

I - INTERIOR GIRDER
 EL - EXTERIOR LEFT GIRDER
 ER - EXTERIOR RIGHT GIRDER

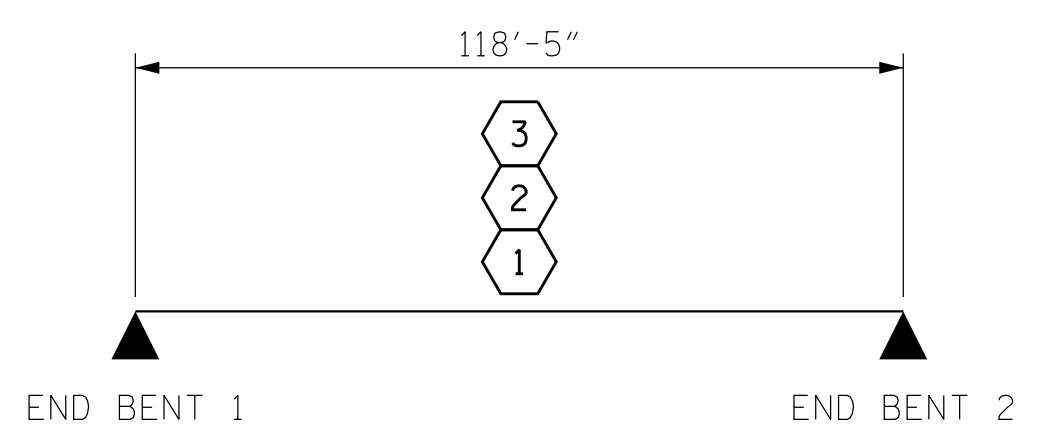

LRFR SUMMARY

PROJECT NO. R-5605
 TRANSYLVANIA COUNTY
 STATION: 36+73.00 -L-

SHEET 4 OF 4

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

STANDARD
 LRFR SUMMARY FOR
 PRESTRESSED
 CONCRETE GIRDERS
 (NON-INTERSTATE TRAFFIC)

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-4
1			3			TOTAL SHEETS
2			4			51

ASSEMBLED BY : PFC DATE : 8/15
 CHECKED BY : CMT DATE : 8/15
 DRAWN BY : MAA 1/08 REV. 11/2/08RR MAA/GM
 CHECKED BY : GM/DI 2/08 REV. 10/1/11 MAA/GM

Prepared in the Office of:

Mattern & Craig
 CONSULTING ENGINEERS • SURVEYORS
 FROM LICENSE No. G-1154
 12 BROAD STREET
 ASHEVILLE, NORTH CAROLINA 28801
 (828) 254-2201 • FAX (828) 254-4582

Seal of Steven A. Campbell, Engineer, License No. 14309, State of North Carolina.

*****SYSTEM TIME*****
 *****DCN*****
 *****USERNAME*****