

PROGRAMMING TO OMIT PHASE 6 PEDESTRAIN OPERATION AT "START UP"

INPUT ASSIGNMENT PROGRAMMING DETAIL (program controller as shown below)

1. FROM MAIN MENU PRESS '5' (INPUTS)
2. WITH CURSOR IN "INPUT ASSIGNMENT #" FIELD, USE "-" KEY TO FIND THE INPUT ASSIGNMENT NUMBER 64, AS SHOWN BELOW.
3. PROGRAM CONTROLLER AS SHOWN BELOW.

STEP 1

```

PAGE: 1 C1 PIN:0 NOT ENABLED
INPUT ASSIGNMENT #.....64
DEBOUNCE TIME (0-25.5 SEC).....0.5
DELAY TIME (0-25.5 SEC).....0.0
HOLD-OVER TIME (0-25.5 SEC).....0.0
ASSIGNMENT SELECTION:
NOT ENABLED (Y/N).....Y
VEHICLE DETECTOR (1-64).....
PEDESTRIAN DETECTOR (1-16).....
ALTERNATE PED DETECTOR (1-16).....
PREEMPT (1-10).....
INVERTED PREEMPT (1-10).....
STOP TIME (Y/N).....
FLASH SENSE (Y/N).....
DOOR OPEN (Y/N).....
MANUAL CONTROL ENABLE (Y/N).....
MANUAL CONTROL ADVANCE (Y/N).....
SPECIAL FUNCTION ALARM (1-8).....
TOD HOUR SYNCHRONIZATION (0-23).....
FORCE OFF RING (1-4).....
HOLD PHASES (1-16).....
PLAN (65=FLSH,66=FREE).._ OFFSET#..
CHANGE PHASE SEQUENCE PAGE (1-12)...
CHANGE PHASE TIMING PAGE (1-4).....
CHANGE PHASE CONTROL PAGE (1-4)....
CHANGE OVERLAP CONTROL PAGE (1-4)...
CHANGE INPUT PAGE (1-4).....
CHANGE OUTPUT PAGE (1-4).....
OVERRIDE PHASE CONTROL FUNCTION (Y).Y
    
```

SCROLL DOWN TO VIEW ALL DATA
↓

EXISTING DEFAULT PROGRAMMING (IGNORE FOR NOW)

STEP 2

AFTER SELECTION IS MADE, THE PHASE CONTROL FUNCTIONS TABLE APPEARS. SCROLL DOWN ON THIS TABLE AND FIND "OMIT PEDESTRIAN". THEN SELECT PHASE 6 FOR "OMIT PEDESTRIAN".

AFTER SELECTION IS MADE PRESS "ESC" → → →

SCREEN NOW APPEARS AS SHOWN TO THE RIGHT.
(PROGRAMMING COMPLETE)

SELECT "Y" FOR "OVERRIDE PHASE CONTROL FUNCTION"

STEP 3

```

PAGE: 1 C1 PIN:0 OVERRIDE PHASE CONTROL
INPUT ASSIGNMENT #.....64
DEBOUNCE TIME (0-25.5 SEC).....0.5
DELAY TIME (0-25.5 SEC).....0.0
HOLD-OVER TIME (0-25.5 SEC).....0.0
ASSIGNMENT SELECTION:
NOT ENABLED (Y/N).....
VEHICLE DETECTOR (1-64).....
PEDESTRIAN DETECTOR (1-16).....
ALTERNATE PED DETECTOR (1-16).....
PREEMPT (1-10).....
INVERTED PREEMPT (1-10).....
STOP TIME (Y/N).....
FLASH SENSE (Y/N).....
DOOR OPEN (Y/N).....
MANUAL CONTROL ENABLE (Y/N).....
MANUAL CONTROL ADVANCE (Y/N).....
SPECIAL FUNCTION ALARM (1-8).....
TOD HOUR SYNCHRONIZATION (0-23).....
FORCE OFF RING (1-4).....
HOLD PHASES (1-16).....
PLAN (65=FLSH,66=FREE)..65 OFFSET#..
CHANGE PHASE SEQUENCE PAGE (1-12)...
CHANGE PHASE TIMING PAGE (1-4).....
CHANGE PHASE CONTROL PAGE (1-4)....
CHANGE OVERLAP CONTROL PAGE (1-4)...
CHANGE INPUT PAGE (1-4).....
CHANGE OUTPUT PAGE (1-4).....
OVERRIDE PHASE CONTROL FUNCTION (Y).Y
    
```

AFTER INPUT PROGRAMMING IS ACCOMPLISHED PROCEED TO LOGIC PROCESSOR PROGRAMMING SHOWN BELOW.

LOGICAL I/O PROCESSOR PROGRAMMING DETAIL FOR SPECIAL PEDESTRIAN START-UP (program controller as shown below)

FROM MAIN MENU ENTER 6 (OUTPUTS). THEN SELECT 3 (LOGICAL I/O PROCESSOR).

```

LOGICAL I/O COMMAND #1 (+/-COMMAND#)
IF INPUT ASSIGNMENT #43 IS ON

↓
SCROLL DOWN

THEN:
SET INPUT ASSIGNMENT #64 ON
    
```

! IMPORTANT !


IN ORDER FOR LOGIC PROCESSOR PROGRAMMING TO FUNCTION, THE COMMANDS HAVE TO BE ACTIVATED ON THE CONTROL PAGE. FROM THE MAIN MENU SELECT 2 "PHASE CONTROL", THEN 1 "PHASE CONTROL FUNCTIONS". SCROLL DOWN UNTIL YOU SEE "ACT LOGIC 1-16". TOGGLE COMMAND 1 "ON". LOGIC PROCESSOR FUNCTION WILL NOW OPERATE.

PROGRAMMING COMPLETE

INPUT ASSIGNMENT 43 = FLASH SENSE
INPUT ASSIGNMENT 64 = OMIT 6 PED

NOTE: THIS LOGIC STATEMENT OMITTS 6 PED FOR THE FIRST CYCLE WHEN EITHER STARTING UP FROM A POWER FAILURE OR COMING OUT OF FLASH.

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: COA-0107
DESIGNED: MAY 2016
SEALED: 12-13-2016
REVISED:

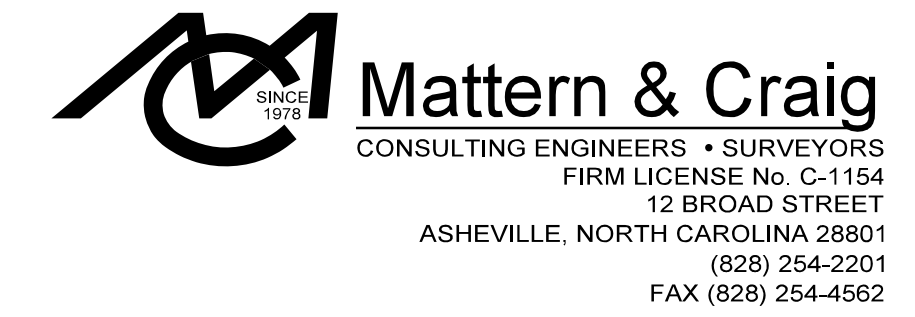

ELECTRICAL DETAIL SHEET 2 OF 2

| | | | |
|--|---|---|--|
| <p>161 S. Charlotte St, Asheville NC 28802</p> | <p>College St at Haywood St</p> | | |
| | <p>Division 13 Buncombe County Asheville</p> <p>PLAN DATE: MAY 2016 REVIEWED BY: SMH</p> <p>PREPARED BY: BGR REVIEWED BY: JBV</p> | <p>Division 13 Buncombe County Asheville</p> <p>Division 13 Buncombe County Asheville</p> | |

12:56:31 PM R:\3602 Asheville\110 Signal System\DWG\COA-0107\COA-0107_elec_dsn.dgn