

BEAM REPAIR QUANTITY TABLE					
STEEL PLATES		STIFFENER		STEEL BEARING KEEPER ANGLE ASSEMBLY	
LBS.		LBS.		EA.	
ESTIMATE	ACTUAL	ESTIMATE	ACTUAL	ESTIMATE	ACTUAL
43.8		12.0		1	

ANTICIPATED BEAM REPAIR LOCATIONS									
SPAN	BEAM	LOCATION	REPAIR TYPE	DIM "A"	DIM "B"	DIM "C"	DIM "D"	DIM "E"	DIM "F"
E	3	BENT 4	S	4"	4"				

AS-BUILT REPAIR QUANTITY TABLE				
DECK UNDERSIDE REPAIR - SPAN E				
SHOTCRETE REPAIR	ESTIMATE		ACTUAL	
	AREA SQ. FT.	VOLUME CU. FT.	AREA SQ. FT.	VOLUME CU. FT.
UNDERSIDE OF DECK	0.0	0.0		
UNDERSIDE OF OVERHANG	0.0	0.0		
DIAPHRAGM	0.0	0.0		
OTHER REPAIRS	ESTIMATE		ACTUAL	

VALUES IN CHART REPRESENT ESTIMATED REPAIR TOTALS AFTER REMOVAL OF UNSOUND CONCRETE, MINIMUM OF 1" BEHIND REBAR AND MINIMUM 2" CLEARANCE TO SAWCUT. SEE "OVERHANG, DIAPHRAGM AND BRIDGE RAIL REPAIR DETAILS" SHEET.

NOTES

REPAIR LOCATIONS AND ESTIMATE OF QUANTITIES ARE BASED ON THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER WILL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATIONS AND DESCRIPTION OF THE REPAIRS AND ENTER THE ACTUAL QUANTITIES INTO THE AS-BUILT REPAIR QUANTITY TABLE.

FOR SHOTCRETE REPAIRS, SEE SPECIAL PROVISIONS.

SHOTCRETE REPAIRS MAY BE REPLACED WITH CONCRETE REPAIRS WITH THE APPROVAL OF THE ENGINEER.

CONTRACTOR SHALL SAWCUT TO A NOMINAL DEPTH OF 1/2" BUT REINFORCING STEEL SHALL NOT BE DAMAGED.

CONTRACTOR SHALL REMOVE SURFACE CONCRETE TO VERIFY THAT SAWCUT DEPTH WILL NOT DAMAGE EXISTING REINFORCING STEEL.

FOR UNDERSIDE OF DECK AND OVERHANG REPAIRS, SEE "OVERHANG, DIAPHRAGM AND BRIDGE RAIL REPAIR DETAILS" SHEET.

FOR EPOXY RESIN INJECTION, SEE SPECIAL PROVISIONS.

PRIOR TO CLEANING AND PAINTING, REPLACE AND/OR TIGHTEN MISSING NUTS AND WASHERS. PAYMENT FOR THE WASHERS AND NUTS SHALL BE CONSIDERED INCIDENTAL TO VARIOUS PAY ITEMS.


FOR STIFFENER REPAIR, SEE "BEAM PLATING REPAIR DETAILS" SHEET.

FOR BEAM REPAIR - PLATING, SEE SPECIAL PROVISIONS.

FOR STEEL BEARING KEEPER ANGLE ASSEMBLY, SEE SPECIAL PROVISIONS.

FOR STEEL BEARING KEEPER ANGLE ASSEMBLY DETAILS, SEE "STEEL BEARING KEEPER ANGLE ASSEMBLY DETAILS" SHEET.

FOR END OF GIRDER REPAIR, SEE "BEAM PLATING REPAIR DETAILS" SHEET.



SHOTCRETE REPAIR



ERI - EPOXY RESIN INJECTION




GIRDER END REPAIR



STIFFENER REPAIR



STEEL BEARING KEEPER ANGLE ASSEMBLY

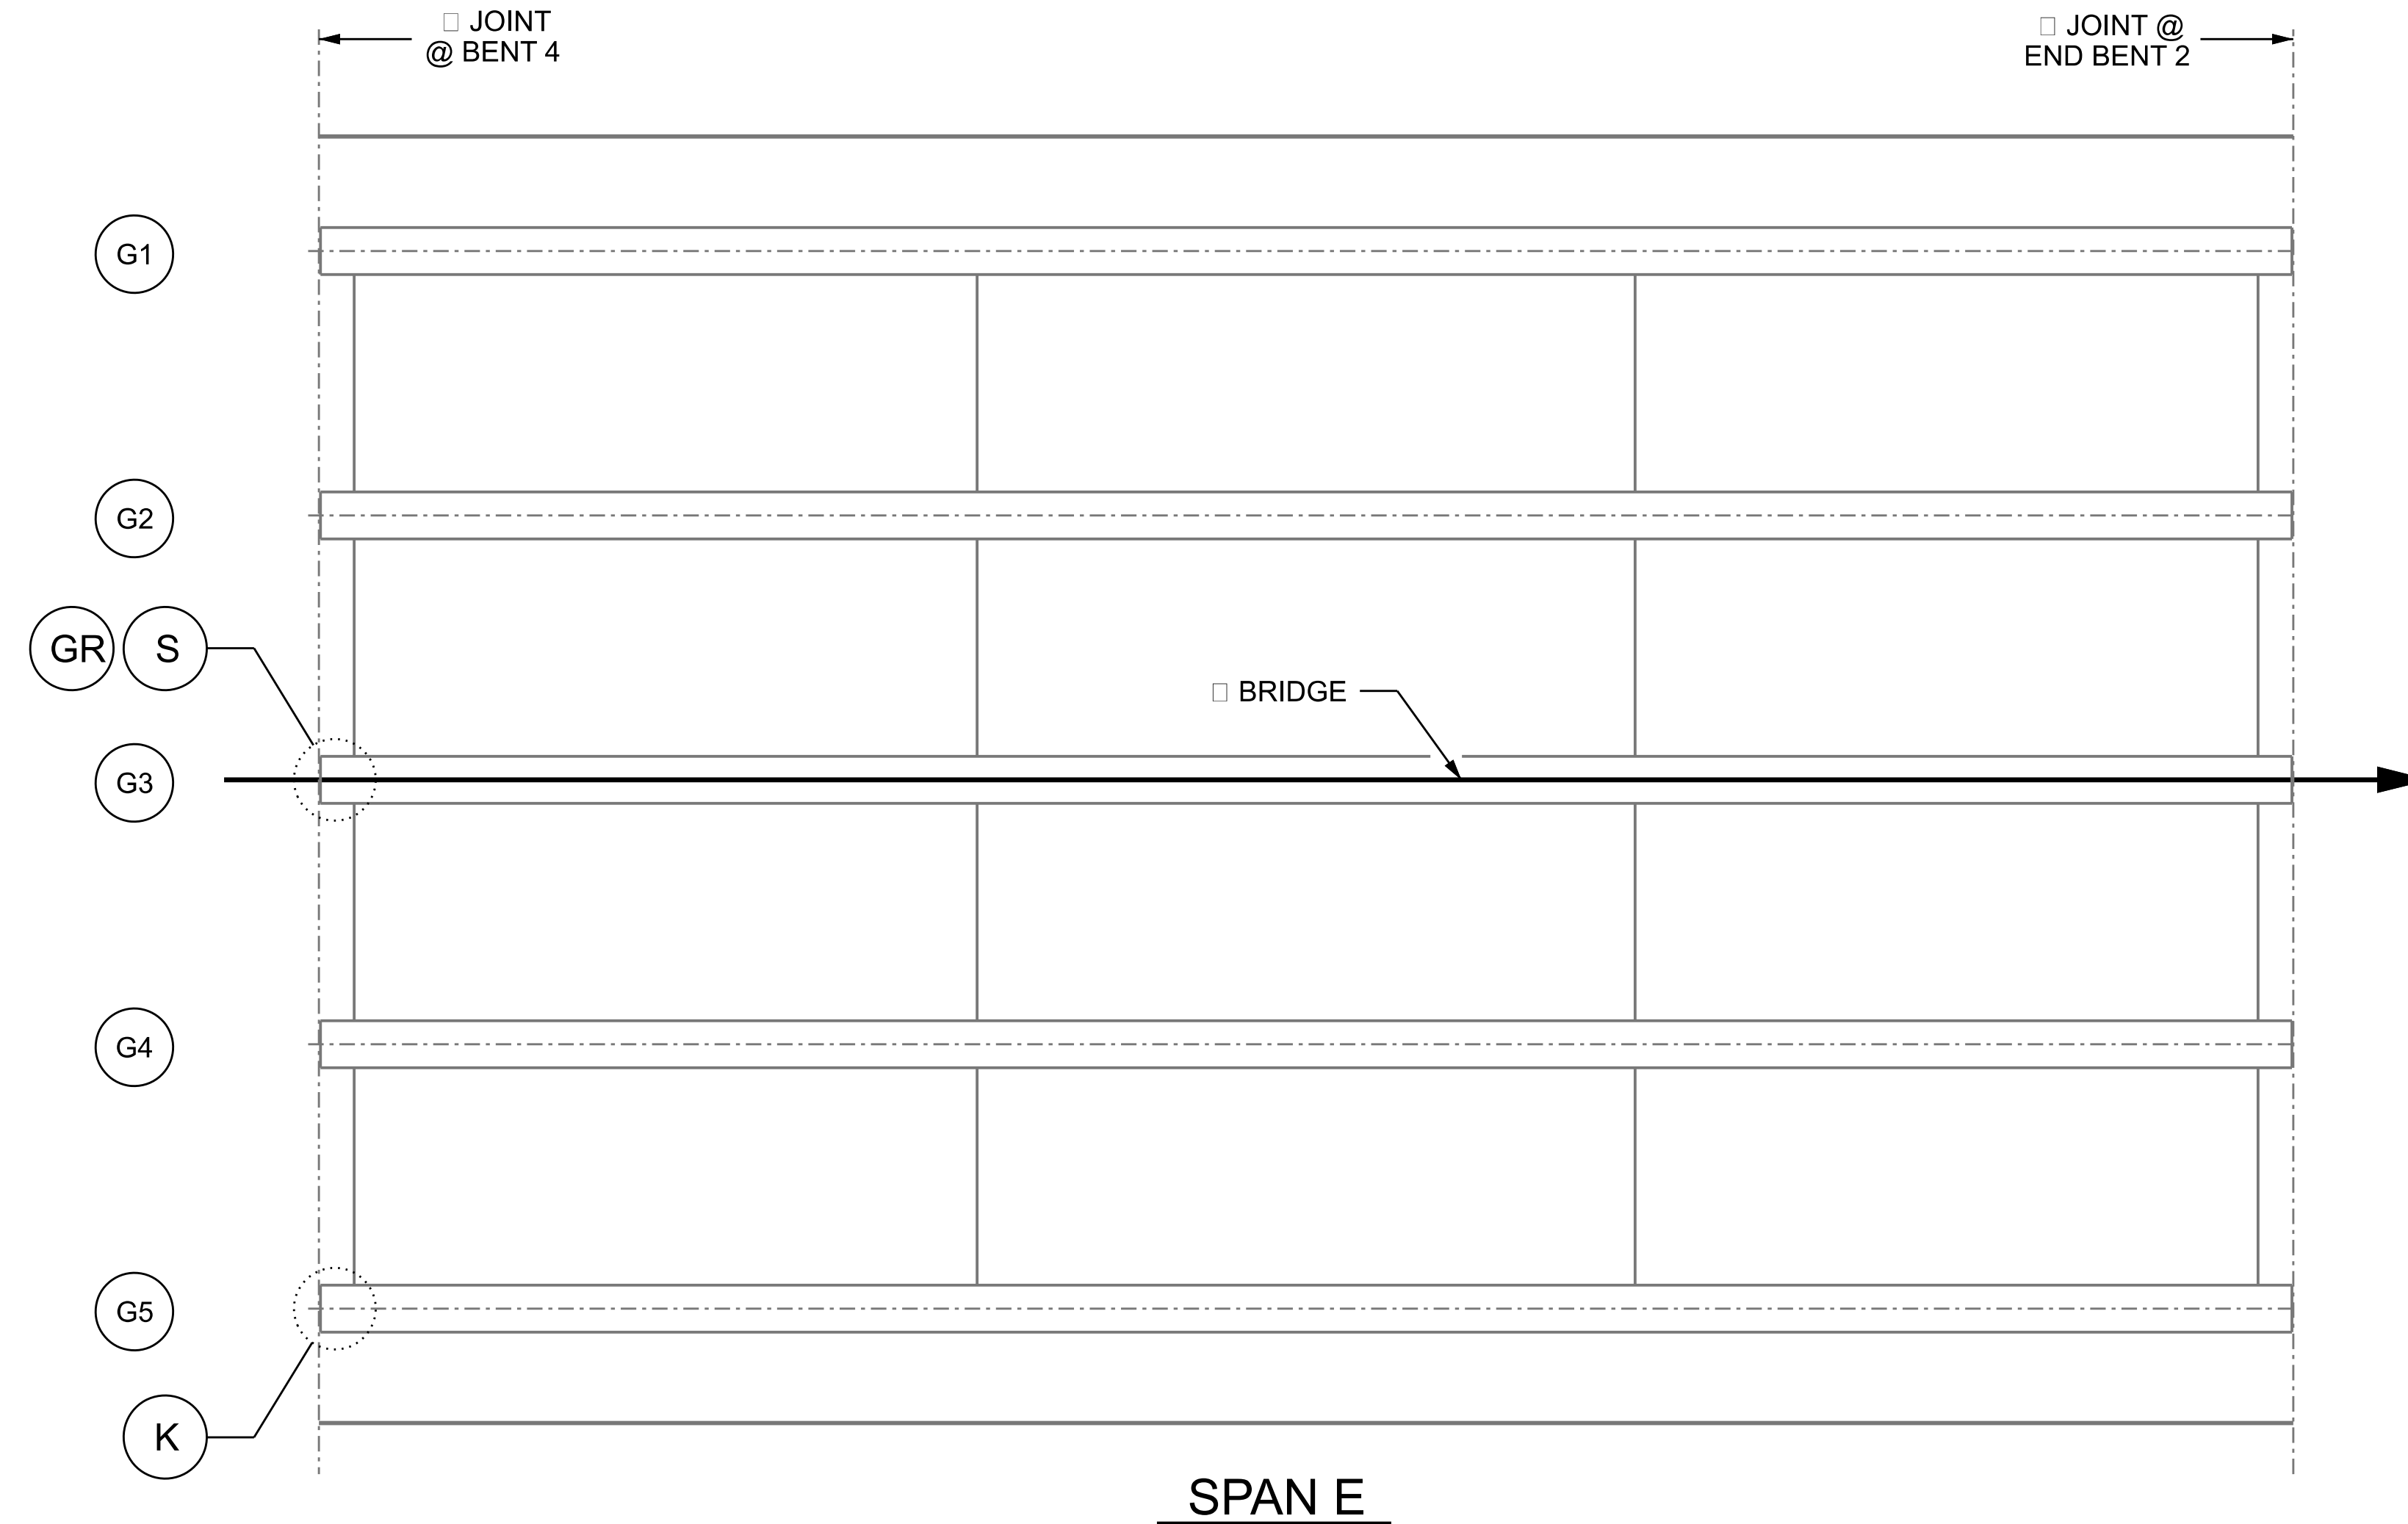

SPAN E

PROJECT NO. 15BPR.125.3

CHEROKEE COUNTY

BRIDGE NO. 190009

SHEET 5 OF 5



STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH
**DECK UNDERSIDE REPAIR
SPAN E**

DRAWN BY : A. SORSENGIH DATE : 6/2022
CHECKED BY : S. AGUILA HERNANDEZ DATE : 6/2022

DOCUMENT NOT CONSIDERED
FINAL UNLESS ALL
SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S1-14
1			3			TOTAL SHEETS
2			4			25