PROJECT REFERENCE NO. R-3833C

2C-1

RATION HWAYS

8

Ш CONCRET ENGL 0

SHEET 1 OF 1 846D01

S

CONTRACT STANDARDS AND DEVELOPMENT UNIT Office 919-707-6950 FAX 919-250-4119

SEE PLATE FOR TITLE

ORIGINAL BY: STD. 846.01 DATE:

MODIFIED BY: E.E. WARD DATE: 8-15-00

CHECKED BY: DATE: FILE SPEC.: /usr/details/stand/c&g2'-9".dgn

**GENERAL NOTES:** 


-PLACE CONTRACTION JOINTS AT 10' INTERVALS, EXCEPT THAT A 15' SPACING MAY BE USED WHEN A MACHINE IS USED OR WHEN SATISFACTORY SUPPORT FOR THE FACE FORM CAN BE OBTAINED WITHOUT THE USE OF TEMPLATES AT 10' INTERVALS.

-JOINT SPACING MAY BE ALTERED IF REQUIRED BY THE ENGINEER. -CONTRACTION JOINTS MAY BE INSTALLED WITH THE USE OF TEMPLATES OR FORMED BY OTHER APPROVED METHODS. MAKE NON-TEMPLATE FORMED JOINTS A MIN. OF  $1\frac{1}{2}$ " DEEP.

-FILL ALL CONSTRUCTION JOINTS WITH JOINT FILLER AND SEALER.


-SPACE EXPANSION JOINTS AT 90' INTERVALS AND ADJACENT TO ALL RIGID OBJECTS.

-SEE RDWY. STD. DWG. NO. 846.01, SHEET 2 OF 3 FOR PLACEMENT IN SUPERELEVATIONS. (USE 2'-6" CURB AND GUTTER RATES)

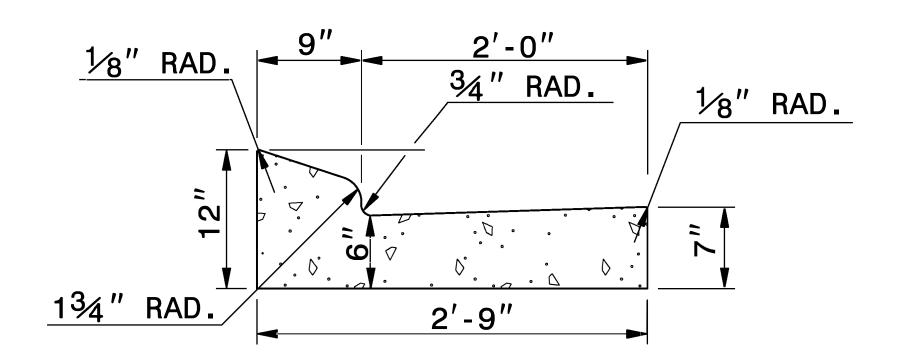


2'-9" CURB AND GUTTER

## SECTION VIEW OF CURB AND GUTTER

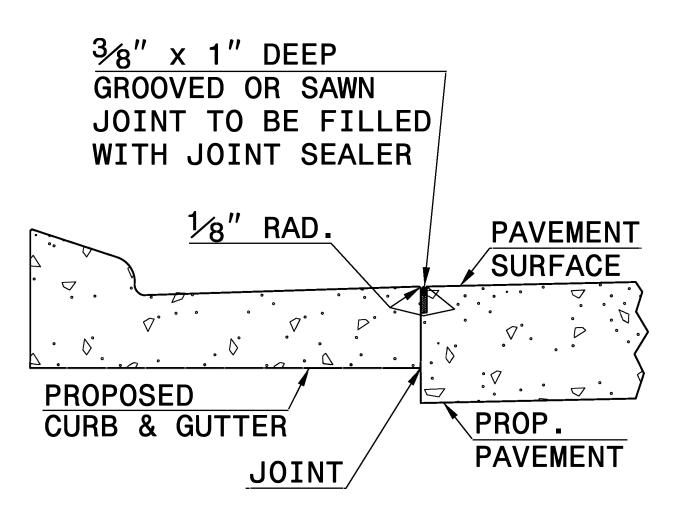

LONGITUDINAL JOINT

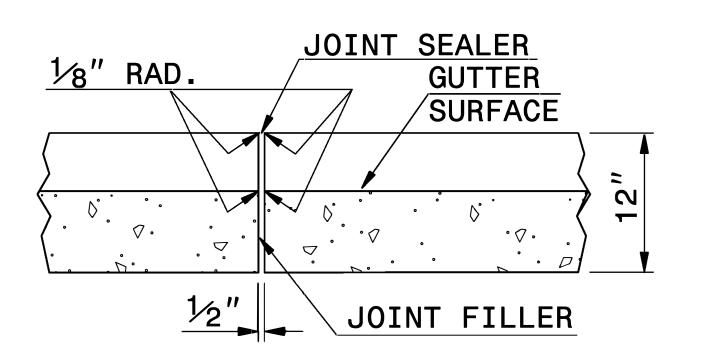

TRANSVERSE EXPANSION JOINT IN CURB AND GUTTER

## SECTION VIEW OF JOINTS

SHEET 1 OF 1

846D01

LINA ORTATION IGHWAYS

Ŋ

CONCRETE

CURB

20

GUT

**TER** 

**ENGLISH** 

DETAIL

DRAWING

**FOR**