

SPI

**Law Enforcement:**  
2-19-09

**Description**

Furnish Law Enforcement Officers and marked Law Enforcement vehicles to direct traffic in accordance with the contract.

**Construction Methods**


Use uniformed Law Enforcement Officers and marked Law Enforcement vehicles equipped with blue lights mounted on top of the vehicle, and Law Enforcement vehicle emblems to direct or control traffic as required by the plans or by the Engineer.

**Measurement and Payment**

Law Enforcement will be measured and paid for in the actual number of hours that each Law Enforcement Officer is provided during the life of the project as approved by the Engineer. There will be no direct payment for marked Law Enforcement vehicles as they are considered incidental to the pay item.

Payment will be made under:

<b>Pay Item</b>	<b>Pay Unit</b>
Law Enforcement	Hour

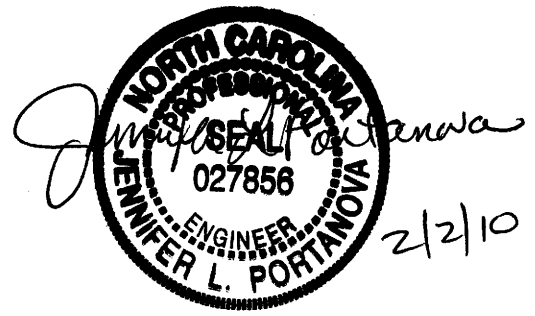

**Warning Flags:**

**General:**

Use flags which are orange or fluorescent versions of orange. Each flag must be 16 inches square or larger, and attached to a staff.

**Flag Material:**

Use fabric type flags made of an orange or fluorescent orange flexible type of material such as vinyl or nylon.

**Material Certification:**

Furnish a Type 3 Certification in accordance with Article 106-3 for all warning flags prior to use.

**Approval:**

All materials are subject to the approval of the Engineer.

**Payment will be made under:**

<b>Pay Item</b>	<b>Pay Unit</b>
Warning Flags	Each