

DEAD LOAD DEFLECTION TABLE FOR GIRDERS

	GIRDER 3																																										
	SPAN A																	SPAN B																									
TWENTIETH POINTS	0	.05	.10	.15	.20	.25	.30	.35	.40	.45	.50	.55	.60	.65	.70	.75	.80	.85	.90	.95	0	.05	.10	.15	.20	.25	.30	.35	.40	.45	.50	.55	.60	.65	.70	.75	.80	.85	.90	.95	0		
DEFLECTION DUE TO WEIGHT OF GIRDER	0.000	0.000	-0.001	-0.001	-0.001	-0.001	-0.001	-0.001	-0.001	-0.001	-0.001	-0.001	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	-0.001	-0.002	-0.003	-0.004	-0.005	-0.007	-0.008	-0.008	-0.009	-0.009	-0.008	-0.008	-0.007	-0.006	-0.005	-0.004	-0.002	-0.001	-0.001	0.000		
DEFLECTION DUE TO WEIGHT OF SLAB *	0.000	-0.001	-0.002	-0.003	-0.003	-0.004	-0.004	-0.004	-0.004	-0.004	-0.003	-0.002	-0.002	-0.001	0.000	0.001	0.001	0.001	0.001	0.001	0.000	-0.003	-0.006	-0.010	-0.015	-0.019	-0.023	-0.026	-0.029	-0.030	-0.030	-0.030	-0.028	-0.025	-0.021	-0.017	-0.013	-0.009	-0.005	-0.002	0.000		
DEFLECTION DUE TO WEIGHT OF BARRIER RAIL	0.000	0.000	0.000	0.000	-0.001	-0.001	-0.001	-0.001	-0.001	-0.001	-0.001	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	-0.001	-0.002	-0.002	-0.003	-0.004	-0.004	-0.005	-0.005	-0.005	-0.005	-0.004	-0.004	-0.003	-0.003	-0.002	-0.001	-0.001	0.000	0.000			
TOTAL DEAD LOAD DEFLECTION	0.000	-0.001	-0.003	-0.004	-0.005	-0.006	-0.006	-0.006	-0.006	-0.006	-0.005	-0.003	-0.002	-0.001	0.000	0.001	0.001	0.001	0.001	0.001	0.000	-0.004	-0.009	-0.015	-0.021	-0.027	-0.034	-0.038	-0.042	-0.044	-0.044	-0.043	-0.040	-0.036	-0.030	-0.025	-0.019	-0.012	-0.007	-0.003	0.000		
VERTICAL CURVE ORDINATE	0.000	0.001	0.002	0.003	0.003	0.004	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.004	0.003	0.003	0.002	0.001	0.000	0.003	0.005	0.007	0.009	0.010	0.011	0.012	0.013	0.013	0.013	0.013	0.013	0.012	0.011	0.010	0.009	0.007	0.005	0.003	0.000		
ORDINATE DUE TO SUPERELEVATION	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
REQUIRED CAMBER	0	2	5	7	8	10	11	11	11	11	10	8	7	6	5	3	2	2	1	0	0	7	14	22	30	37	45	50	55	57	57	56	53	48	41	35	28	19	12	6	0		

* INCLUDES SLAB, BUILDUPS & STAY-IN-PLACE FORMS.

ALL VALUES ARE SHOWN IN METERS, EXCEPT "FINAL CAMBER" WHICH IS SHOWN IN MILLIMETERS.

DEFLECTIONS ARE TAKEN AT TWENTIETH POINTS BETWEEN BEARINGS.

DEAD LOAD DEFLECTION TABLE FOR GIRDERS

	GIRDER 3																																											
	SPAN C																	SPAN D																										
TWENTIETH POINTS	0	.05	.10	.15	.20	.25	.30	.35	.40	.45	.50	.55	.60	.65	.70	.75	.80	.85	.90	.95	0	.05	.10	.15	.20	.25	.30	.35	.40	.45	.50	.55	.60	.65	.70	.75	.80	.85	.90	.95	0			
DEFLECTION DUE TO WEIGHT OF GIRDER	0.000	0.000	-0.001	-0.001	-0.002	-0.003	-0.004	-0.005	-0.005	-0.005	-0.005	-0.005	-0.005	-0.004	-0.003	-0.002	-0.001	0.000	0.000	0.000	0.000	-0.001	-0.003	-0.004	-0.007	-0.009	-0.011	-0.013	-0.015	-0.016	-0.017	-0.017	-0.017	-0.017	-0.016	-0.014	-0.012	-0.009	-0.007	-0.003	0.000			
DEFLECTION DUE TO WEIGHT OF SLAB *	0.000	0.000	-0.001	-0.003	-0.006	-0.009	-0.011	-0.013	-0.015	-0.016	-0.015	-0.014	-0.012	-0.010	-0.007	-0.004	-0.001	0.001	0.002	0.002	0.000	-0.004	-0.010	-0.017	-0.024	-0.032	-0.040	-0.047	-0.054	-0.059	-0.062	-0.064	-0.063	-0.061	-0.057	-0.051	-0.043	-0.034	-0.023	-0.012	0.000			
DEFLECTION DUE TO WEIGHT OF BARRIER RAIL	0.000	0.000	0.000	-0.001	-0.001	-0.002	-0.002	-0.002	-0.003	-0.003	-0.003	-0.003	-0.002	-0.002	-0.001	-0.001	0.000	0.000	0.000	0.000	0.000	-0.001	-0.002	-0.003	-0.004	-0.005	-0.006	-0.008	-0.008	-0.009	-0.010	-0.010	-0.010	-0.010	-0.009	-0.008	-0.007	-0.005	-0.004	-0.002	0.000			
TOTAL DEAD LOAD DEFLECTION	0.000	0.000	-0.002	-0.005	-0.009	-0.014	-0.017	-0.020	-0.023	-0.024	-0.023	-0.022	-0.019	-0.016	-0.011	-0.007	-0.002	0.001	0.002	0.002	0.000	-0.006	-0.015	-0.024	-0.035	-0.046	-0.057	-0.068	-0.077	-0.084	-0.089	-0.091	-0.090	-0.088	-0.082	-0.073	-0.062	-0.048	-0.034	-0.017	0.000			
VERTICAL CURVE ORDINATE	0.000	0.003	0.005	0.008	0.009	0.011	0.012	0.013	0.014	0.015	0.015	0.015	0.014	0.013	0.012	0.011	0.009	0.008	0.005	0.003	0.000	0.002	0.004	0.006	0.007	0.008	0.009	0.010	0.010	0.010	0.010	0.010	0.009	0.009	0.008	0.006	0.005	0.004	0.003	0.002	0.001	0.000		
ORDINATE DUE TO SUPERELEVATION	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
REQUIRED CAMBER	0	3	7	13	18	25	29	33	37	39	38	37	33	29	23	18	11	7	3	1	0	8	19	30	42	54	66	78	87	94	99	100	99	96	88	78	66	51	36	18	0			


* INCLUDES SLAB, BUILDUPS & STAY-IN-PLACE FORMS.

ALL VALUES ARE SHOWN IN METERS, EXCEPT "FINAL CAMBER" WHICH IS SHOWN IN MILLIMETERS.

DEFLECTIONS ARE TAKEN AT TWENTIETH POINTS BETWEEN BEARINGS.

PROJECT NO. R-2206B
LINCOLN COUNTY
 STATION: 123+38.105 -L-

SHEET 3 OF 4

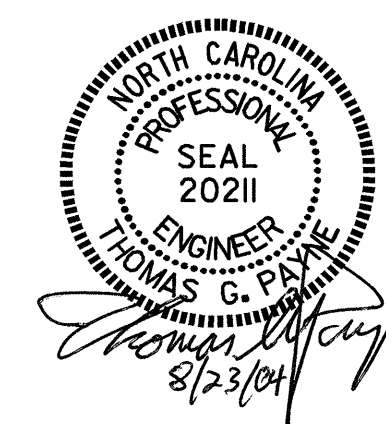

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH
 SUPERSTRUCTURE
 DEAD LOAD DEFLECTION TABLES
 (LEFT LANE)

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-20
1			3			TOTAL SHEETS 86
2			4			

DRAWN BY : M. J. OSTRISHKO DATE : 4-2-01
 CHECKED BY : E. G. ALLEN DATE : 4-20-01