



| PAVEMENT SCHEDULE | |
|-------------------|---|
| A | PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. |
| B | SHOULDER RECONSTRUCTION |
| C | PROP. APPROX. 5.5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YD. |
| D | PROP. APPROX. 5/8" ULTRA THIN ASPHALT CONCRETE SURFACE COURSE, TYPE B, AT AN AVERAGE RATE |
| E | MILL ASPHALT PAVEMENT APPROX. 1½" |


NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.
MILL BRIDGE APPROACHES 100' TO PROVIDE A SMOOTH TRANSITION AS DIRECTED.

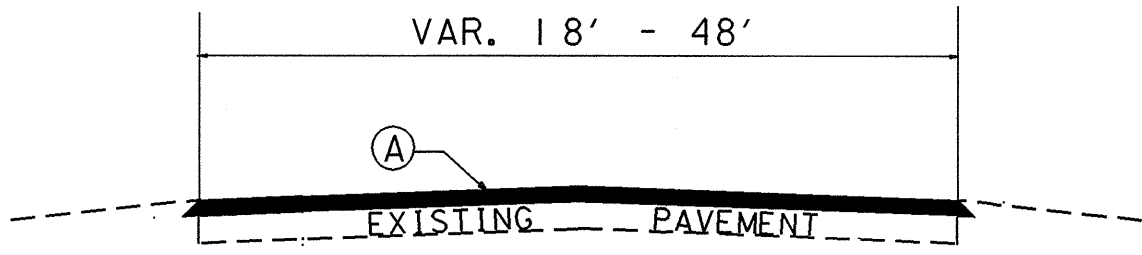


TYPICAL SECTION NO. 1

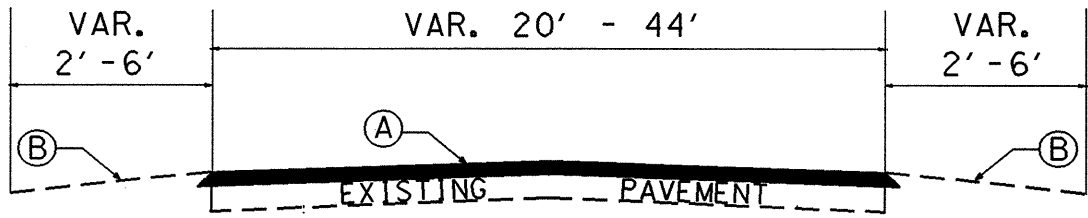


TYPICAL SECTION NO. 2

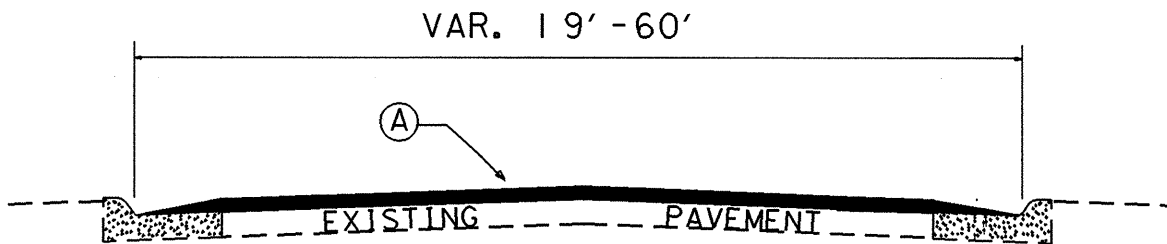

TYPICAL SECTION NO. 3

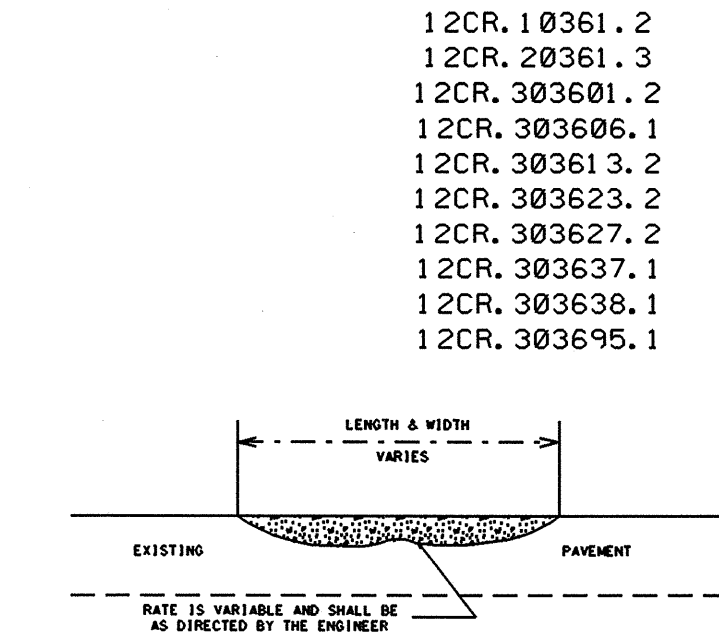


OR

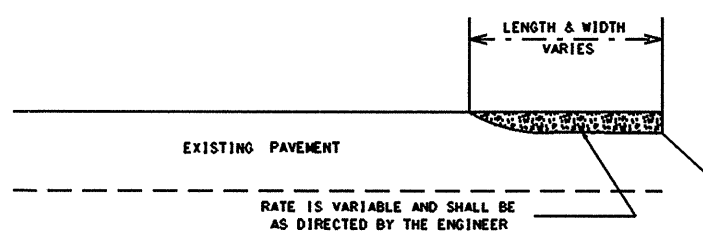

ASPHALT CONCRETE SURFACE COURSE
TYPE S9.5B. (LEVELING COURSE)

- 12CR. 10361.2
- 12CR. 20361.3
- 12CR. 303601.2
- 12CR. 303606.1
- 12CR. 303613.2
- 12CR. 303623.2
- 12CR. 303627.2
- 12CR. 303637.1
- 12CR. 303638.1
- 12CR. 303695.1

| PROJ. REFERENCE NO. | SHEET NO. | TOTAL SHEETS |
|---------------------|-----------------|--------------|
| | 13 | 19 |
| STATE PROJ. NO. | F. A. PROJ. NO. | DESCRIPTION |
| | | |

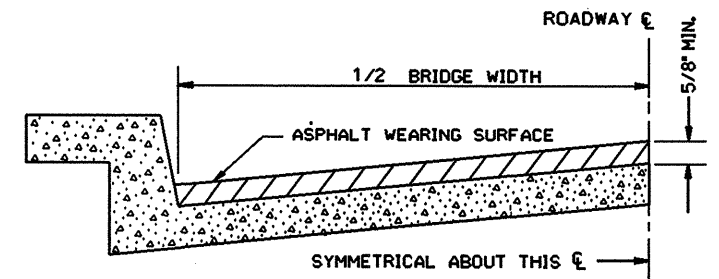


FOR BRIDGES WITH FLOOR DRAINS, CARE SHALL BE EXERCISED IN PLACING THE WEARING SURFACE AROUND FLOOR DRAINS SO AS NOT TO HINDER EFFECTIVE DRAINAGE. ALL DRAINS SHALL BE LEFT OPEN.


THE PROPOSED WEARING SURFACE SHALL VARY IN THICKNESS AS NECESSARY TO PROVIDE A SMOOTH RIDING SURFACE. A THICKNESS OF NOT LESS THAN 5/8" SHALL BE PROVIDED. THE MAXIMUM THICKNESS SHALL PREFERABLY BE 1-1/2" UNLESS IT IS IMPRACTICAL TO PROVIDE A SMOOTH RIDING SURFACE OTHERWISE.

NOTES

ALL UNPAVED S.R. ROADS TO BE SURFACED 50' FROM EDGE OF PAVEMENT OF MAIN PROJECT.
ALL PAVED S.R. ROADS TO BE RESURFACED TO THE ENDS OF THE RADII, OR AS DIRECTED BY THE ENGINEER.
EDGES, PAVEMENT WIDENING, INTERSECTIONS AND BRIDGE FLARES ARE INCLUDED IN THE TABLE OF QUANTITIES.
SHOULDERS AND DITCHES ARE TO BE CONSTRUCTED BY OTHERS UNLESS OTHERWISE NOTED.
BRIDGES TO BE RESURFACED AT LOCATIONS AND TO DEPTH AS DIRECTED BY THE ENGINEER.

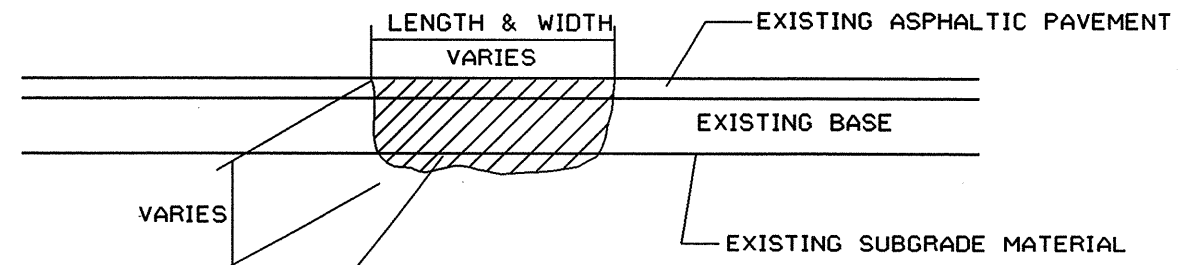

PATCHING EXISTING PAVEMENT

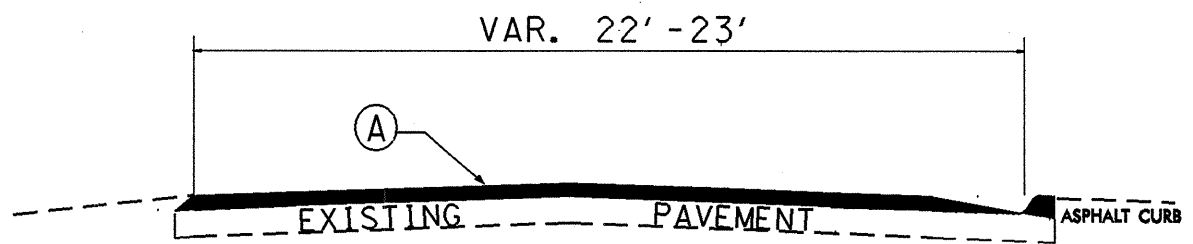

TYPICAL SECTION NO. 4