



TYPICAL SECTION NO. 8

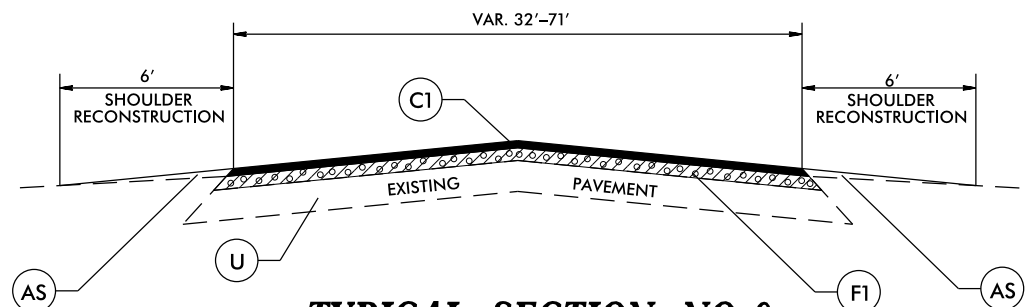


TYPICAL SECTION NO. 9

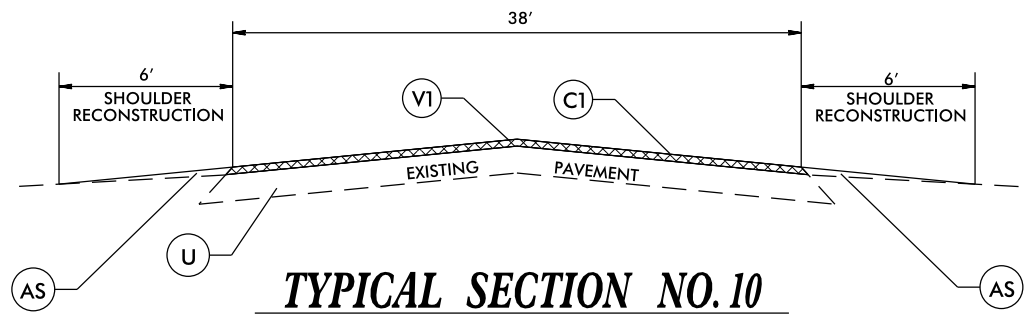


TYPICAL SECTION NO. 10

NOTE: MAP 9 INCLUDES MILLING AND RESURFACING CROSSOVERS AS DIRECTED BY ENGINEER.

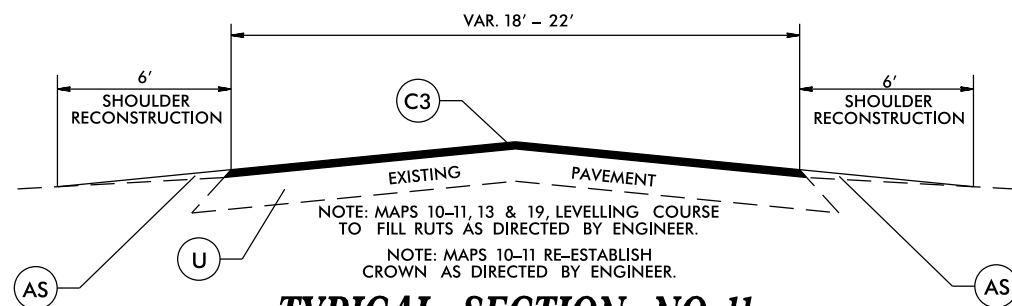


TYPICAL SECTION NO. 11

NOTE: MAPS 10-11, 13 & 19, LEVELLING COURSE TO FILL RUTS AS DIRECTED BY ENGINEER.
NOTE: MAPS 10-11 RE-ESTABLISH CROWN AS DIRECTED BY ENGINEER.

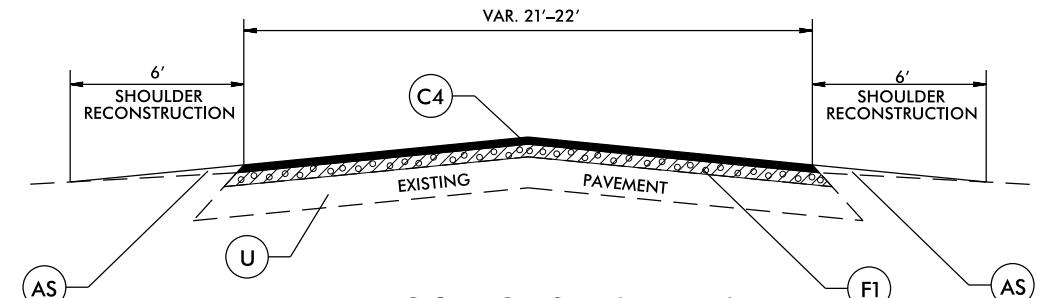

TYPICAL SECTION NO. 12

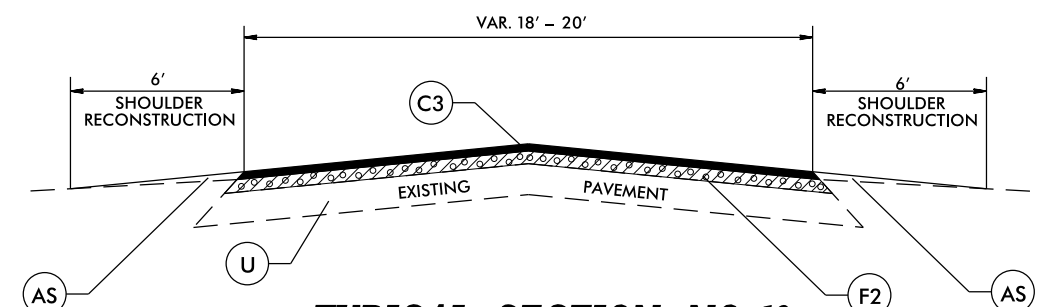

TYPICAL SECTION NO. 13

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C2	PROP. APPROX. 2.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS PER SQ. YD.
C3	PROP. APPROX. 1.25" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 137.5 LBS. PER SQ. YD.
C4	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
V1	MILLING 1.5" IN DEPTH
V2	MILLING 2.0" IN DEPTH
F1	PROPOSED ASPHALT SURFACE TREATMENT, MAT COAT WITH #67 STONE
F2	PROPOSED ASPHALT SURFACE TREATMENT, MAT COAT WITH #78M STONE
AS	AGGREGATE SHOULDER BORROW
U	EXISTING PAVEMENT.

040397
05-JUL-2017 14:20
C:\Users\chatham\OneDrive\Documents\July2017\Submit\1\Cont-aset#1\July_2017\Chatham_typicals_2018.dgn