


## TOTAL BILL OF MATERIAL

	REMOVAL OF EXISTING STRUCTURE AT STATION 17+68.00	ASBESTOS ASSESSMENT	UNCLASSIFIED STRUCTURE EXCAVATION AT STATION 17+68.00	CLASS A CONCRETE	BRIDGE APPROACH SLABS	REINFORCING STEEL	PILE DRIVING EQUIPMENT SETUP FOR HP12X53 STEEL PILES	HP12X53 STEEL PILES	VERTICAL CONCRETE BARRIER RAIL	RIP RAP CLASS II (2'-0" THICK)	GEOTEXTILE FOR DRAINAGE	ELASTOMERIC BEARINGS	3'-0" X 2'-0" PRESTRESSED CONCRETE CORED SLABS	FIBER OPTIC CONDUIT SYSTEM		
	LUMP SUM	LUMP SUM	LUMP SUM	CU. YDS.	LUMP SUM	LBS.	EA.	NO.	LIN. FT.	LIN. FT.	TONS	SO. YDS.	LUMP SUM	NO.	LIN. FT.	LIN. FT.
SUPERSTRUCTURE										130.25		LUMP SUM	10	650	126.25	
END BENT NO. 1				13.2		1965	5	5	150		73	82				
END BENT NO. 2				13.2		1965	5	5	125		66	74				
TOTAL	LUMP SUM	LUMP SUM	LUMP SUM	26.4	LUMP SUM	3930	10	10	275	130.25	139	156	LUMP SUM	10	650	126.25

BM. #2 - BENCH TIE SET IN BASE OF 18" BIRCH TREE, 165.00' RT. OF -L- STA. 18+12.00 EL. 949.40

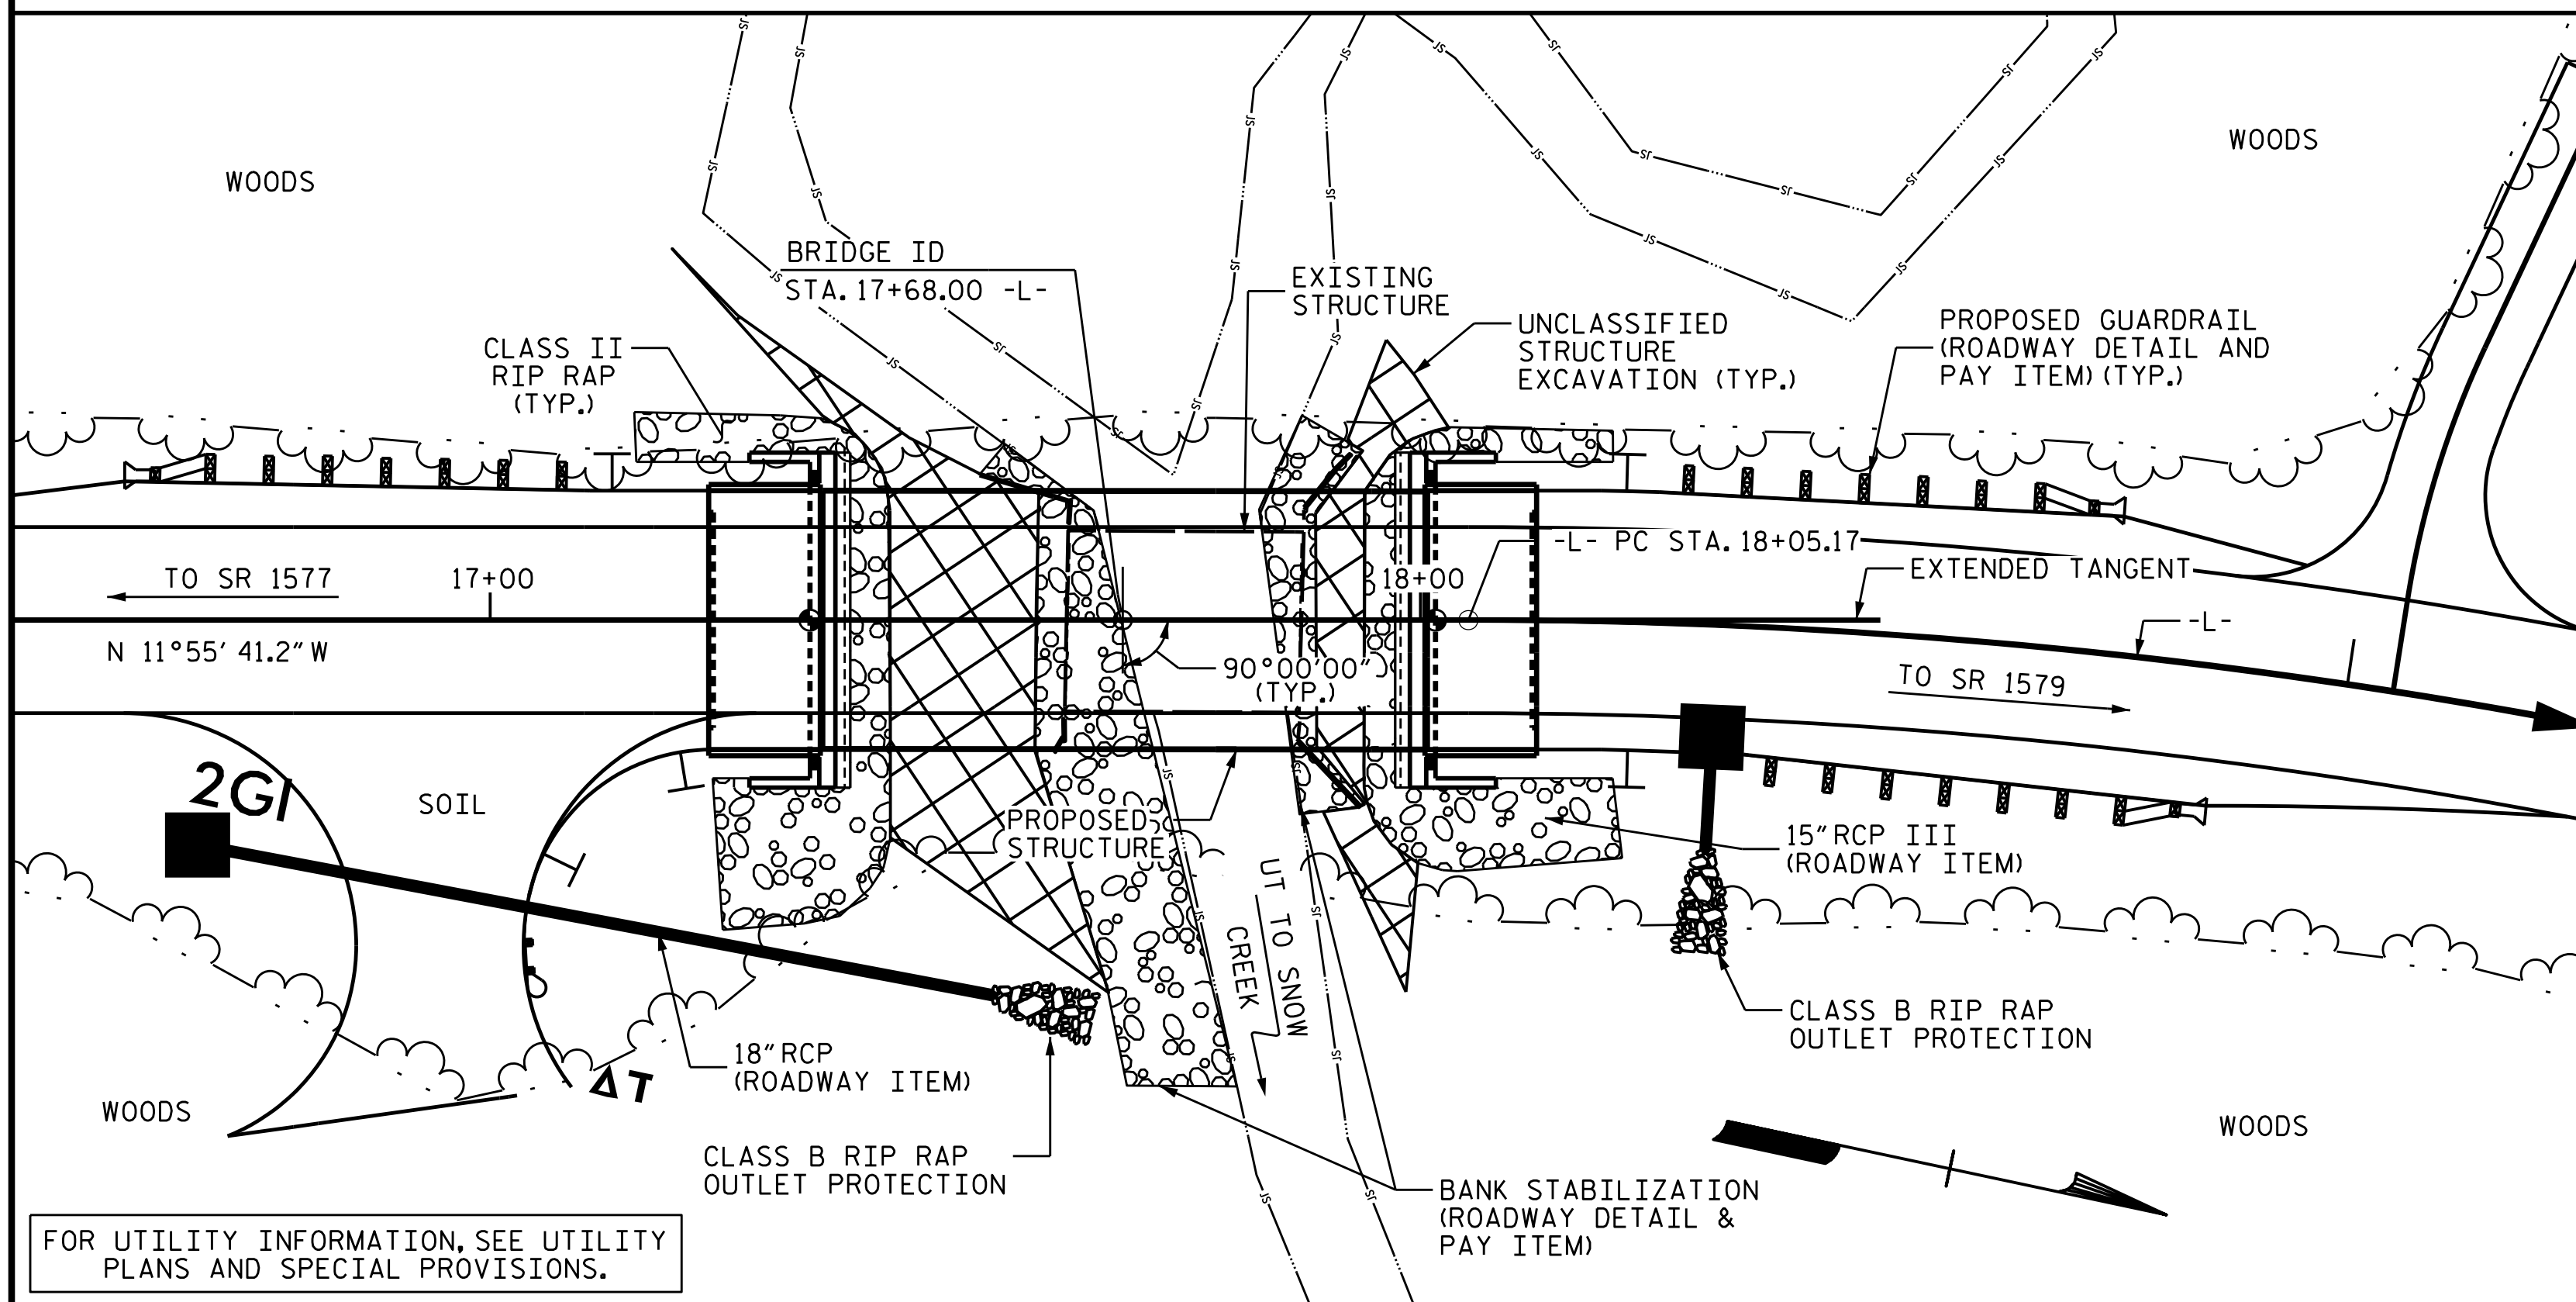

LOCATION SKETCH

### NOTES:

- ASSUMED LIVE LOAD = HL-93 OR ALTERNATE LOADING.
- THIS BRIDGE HAS BEEN DESIGNED IN ACCORDANCE WITH THE AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS.
- THIS BRIDGE IS LOCATED IN SEISMIC ZONE 1.
- FOR OTHER DESIGN DATA AND GENERAL NOTES, SEE SHEET SN.
- FOR SUBMITTAL OF WORKING DRAWINGS, SEE SPECIAL PROVISIONS.
- FOR FALSEWORK AND FORMWORK, SEE SPECIAL PROVISIONS.
- FOR CRANE SAFETY, SEE SPECIAL PROVISIONS.
- FOR GROUT FOR STRUCTURES, SEE SPECIAL PROVISIONS.
- INASMUCH AS THE PAINT SYSTEM ON THE EXISTING STRUCTURAL STEEL CONTAINS LEAD, THE CONTRACTOR'S ATTENTION IS DIRECTED TO ARTICLE 107-1 OF THE STANDARD SPECIFICATIONS. ANY COSTS RESULTING FROM COMPLIANCE WITH APPLICABLE STATE OR FEDERAL REGULATIONS PERTAINING TO HANDLING OF MATERIALS CONTAINING LEAD BASED PAINT SHALL BE INCLUDED IN THE BID PRICE FOR "REMOVAL OF EXISTING STRUCTURE AT STATION 17+68.00 -L-."
- THE MATERIAL SHOWN IN THE CROSS-HATCHED AREA SHALL BE EXCAVATED FOR A DISTANCE OF 40 FT LEFT AND RIGHT OF CENTERLINE ROADWAY AT END BENT NO.1 AND A DISTANCE OF 30 FT LEFT AND 40 FT RIGHT OF CENTERLINE ROADWAY AT END BENT NO.2 AS DIRECTED BY THE ENGINEER. THIS WORK WILL BE PAID FOR AT THE CONTRACT LUMP SUM PRICE FOR UNCLASSIFIED STRUCTURE EXCAVATION. SEE SECTION 412 OF THE STANDARD SPECIFICATIONS.
- FOR FIBER OPTIC CONDUIT SYSTEM, SEE SPECIAL PROVISIONS.
- THE EXISTING STRUCTURE CONSISTING OF A SINGLE 25'-9" SPAN WITH A CLEAR ROADWAY WIDTH OF 19.25' AND TIMBER DECK SUPPORTED BY STEEL GIRDERS ON TIMBER CAPS AND PILES LOCATED AT THE PROPOSED STRUCTURE SITE SHALL BE REMOVED. THE EXISTING BRIDGE IS PRESENTLY POSTED FOR LOAD LIMIT. SHOULD THE STRUCTURAL INTEGRITY OF THE BRIDGE DETERIORATE DURING CONSTRUCTION OF THE PROPOSED BRIDGE, A LOAD LIMIT MAY BE POSTED AND MAY BE REDUCED AS FOUND NECESSARY DURING THE LIFE OF THE PROJECT.
- THE SUBSTRUCTURE OF THE EXISTING BRIDGE INDICATED ON THE PLANS IS FROM THE BEST INFORMATION AVAILABLE. SINCE THIS INFORMATION IS SHOWN FOR THE CONVENIENCE OF THE CONTRACTOR, THE CONTRACTOR SHALL HAVE NO CLAIM WHATSOEVER AGAINST THE DEPARTMENT OF TRANSPORTATION FOR ANY DELAYS OR ADDITIONAL COST INCURRED BASED ON DIFFERENCES BETWEEN THE EXISTING BRIDGE SUBSTRUCTURE SHOWN ON THE PLANS AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.
- REMOVAL OF THE EXISTING BRIDGE SHALL BE PERFORMED SO AS NOT TO ALLOW DEBRIS TO FALL INTO THE WATER. THE CONTRACTOR SHALL REMOVE THE BRIDGE AND SUBMIT PLANS FOR DEMOLITION IN ACCORDANCE WITH ARTICLE 402-2 OF THE STANDARD SPECIFICATIONS.
- THIS STRUCTURE HAS BEEN DESIGNED IN ACCORDANCE WITH "HEC 18-EVALUATING SCOUR AT BRIDGES."
- FOR EROSION CONTROL MEASURES, SEE EROSION CONTROL PLANS.
- ASPHALT WEARING SURFACE IS INCLUDED IN ROADWAY QUANTITY ON ROADWAY PLANS.
- FOR ASBESTOS ASSESSMENT FOR BRIDGE DEMOLITION AND RENOVATION ACTIVITIES, SEE SPECIAL PROVISIONS.

### HYDRAULIC DATA

DESIGN DISCHARGE = 580 C.F.S.  
 FREQUENCY OF DESIGN DISCHARGE = 25 YRS.  
 DESIGN HIGH WATER ELEVATION = 947.7  
 DRAINAGE AREA = 1.14 SQ. MI.  
 BASE DISCHARGE (Q100) = 840 C.F.S.  
 BASE HIGH WATER ELEVATION = 948.6

### OVERTOPPING FLOOD DATA


OVERTOPPING DISCHARGE = 2,630 C.F.S.  
 FREQUENCY OF OVERTOPPING FLOOD = 500(+) YRS.  
 OVERTOPPING FLOOD ELEVATION = 953.2  
 SAG LOCATION AT SHOULDER -L- STA. 18+31.85

PROJECT NO. BR-0107  
IREDELL COUNTY  
 STATION: 17+68.00 -L-

SHEET 3 of 3

DRAWN BY : J.M. KEPICH DATE : 11/19  
 CHECKED BY : L.M. SAMPLES DATE : 03/20  
 DESIGN ENGINEER OF RECORD : L.M. SAMPLES DATE : 03/20

**ms consultants, inc.**  
 5444 Wake Park Blvd.  
 Suite 160  
 Raleigh, NC 27607  
 NC License Number : C-3239

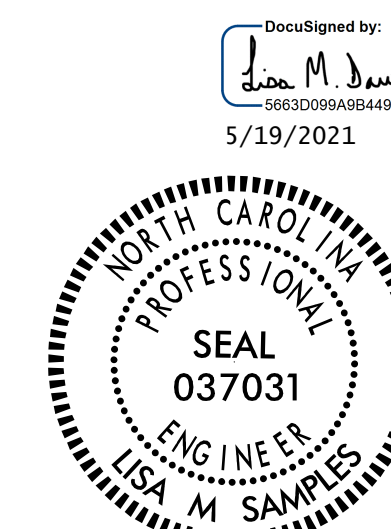

STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION  
RALEIGH

### GENERAL DRAWING

BRIDGE 131 ON SR 1577  
OVER UT TO SNOW CREEK  
BETWEEN SR 1575 AND SR 1579

REVISIONS						SHEET NO. S-03
NO.	BY:	DATE:	NO.	BY:	DATE:	
1			3			TOTAL SHEETS 14
2			4			

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED