



TYPICAL SECTION NO. 16

NOTE: USE ON MAP #13
MILLING AND RESURFACING
FROM LANE LINE/MINI-SKIPS TO EDGE LINE,
DO NOT INCLUDE PAVED SHOULDER

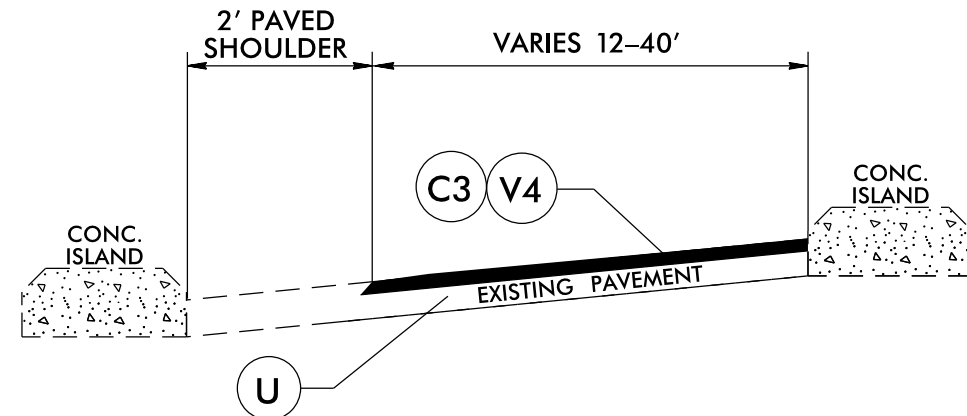

TYPICAL SECTION NO. 18

NOTE: USE ON MAPS #9,10,12
MILLING AND RESURFACING FROM ISLAND TO EDGE LINE,
DO NOT INCLUDE PAVED SHOULDER

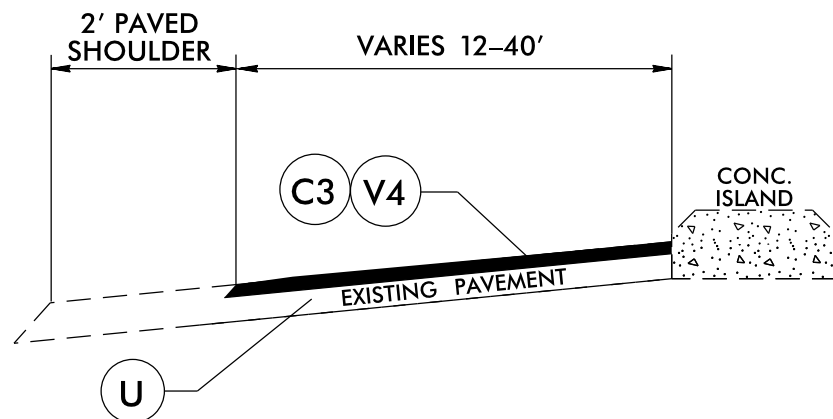

TYPICAL SECTION NO. 17

NOTE: USE ON MAPS #9,10, AND 12
MILLING AND RESURFACING
FROM ISLAND TO EDGE LINE,
DO NOT INCLUDE PAVED SHOULDER.

PAVEMENT SCHEDULE

C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
C2	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C3	PROP. APPROX. 2.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
M1	CENTERLINE MILLED RUMBLE STRIPS (SEE DETAIL)
S	AGGREGATE SHOULDER BORROW
U	EXISTING PAVEMENT.
V1	MILLING 1.5" IN DEPTH
V2	MILLING 3.5" IN DEPTH
V3	MILLING 0-4.75" IN DEPTH
V4	MILLING 2.0" IN DEPTH