5/14/99

PROJECT REFERENCE NO.	SHEET NO.
2022CPT.05.13.10291.1.etc.	25

PAY LIMITS FOR 1 CURB RAMP

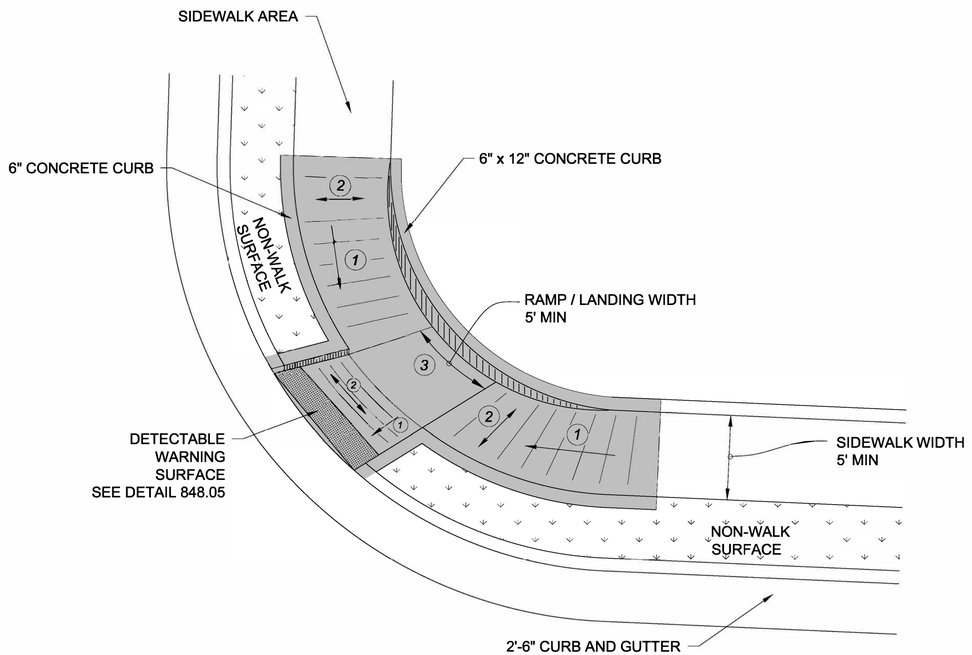

TYPE 3 MODIFIED
INSTALLATION IN A RADIUS

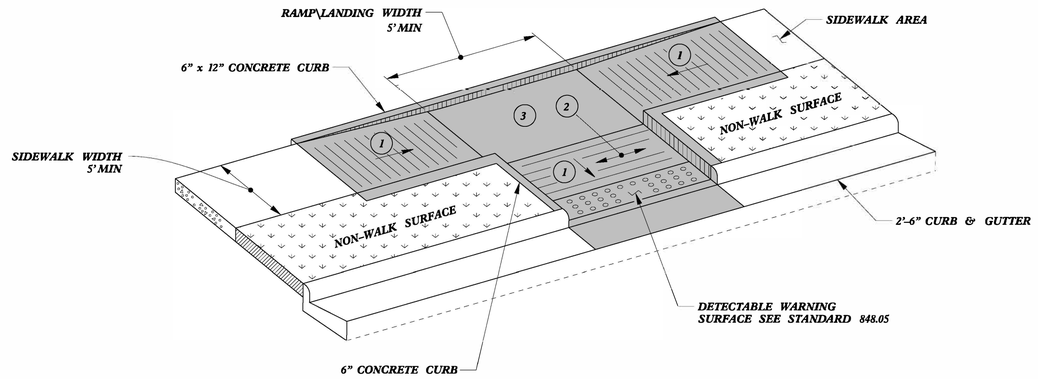

TYPE 3

(1) *8.33% (12:1) MAX RAMP SLOPE*

(2) *CROSS SLOPE: 2.00%*

(3) *CURB RAMPS REQUIRE A (4'-0") MINIMUM LANDING WITH A MAXIMUM CROSS SLOPE AND LONGITUDINAL SLOPE OF 2.00% WHERE PEDESTRIANS PERFORM TURNING MANEUVERS. SLOPE TO DRAIN TO CURB.*

NORTH CAROLINA PROFESSIONAL SEAL 022966 ENGINEER J. S. Howerton
11/10/2021

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

CONTRACT STANDARDS AND DEVELOPMENT UNIT
Office 919-707-6950 FAX 919-250-4119

CURB RAMPS

ORIGINAL BY: J.S. HOWERTON DATE: 7/7/11
MODIFIED BY: _____ DATE: _____
CHECKED BY: _____ DATE: _____
FILE SPEC. stds/2012CurbRamp/CurbRampDetails.dgn

$$$$SYSTEM$$$$
$$$$USERNAME$$$$