


PATCHING EXISTING PAVEMENT PRIOR TO RESURFACING

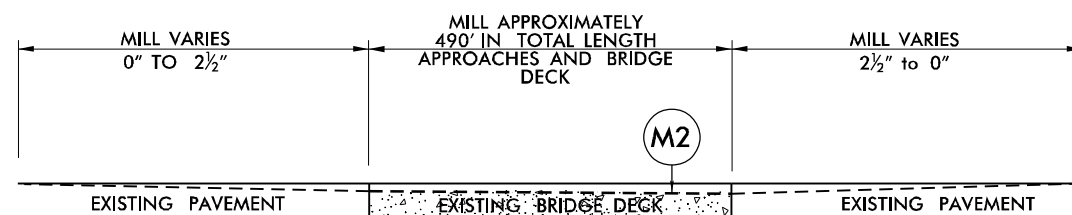

ADDITIONAL MILLING
YADKINVILLE RD SR1525
ON BRIDGE #261 DECK
AND APPROACHES FOR
A TOTAL OF 4" OFF
OF BRIDGE DECK
 (SEE BRIDGE DATA SHEET)

PAVEMENT SCHEDULE

C1	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, TO BE APPLIED AT AN AVERAGE RATE OF 165 LBS PER SQ YD.
C2	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, TO BE APPLIED AT AN AVERAGE RATE OF 168 LBS PER SQ YD.
E	PROP. APPROX. 5½" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, TO BE APPLIED AT AN AVERAGE RATE OF 627 LBS PER SQ YD.
F	ASPHALT SURFACE TREATMENT, MATCOAT, #67 STONE TO BE APPLIED AT AN AVERAGE RATE OF 38 LBS PER SY YD, EMULSION RATE OF 0.40 GAL PER SY YD
M	MILL ASPHALT PAVEMENT, 0" TO 1½"
M1	MILL ASPHALT PAVEMENT, 1½" DEPTH
M2	MILL ASPHALT PAVEMENT, 0" TO 2½"
M3	MILL ASPHALT PAVEMENT/SHOULDER, 5½" DEPTH
S	SHOULDER RECONSTRUCTION (SEE DETAIL)
U	EXISTING PAVEMENT