

## GENERAL NOTES / LOCAL NOTES

CHANGES MAY BE REQUIRED WHEN PHYSICAL DIMENSIONS IN THE DETAIL DRAWINGS, STANDARD DETAILS AND ROADWAY DETAILS ARE NOT ATTAINABLE TO MEET FIELD CONDITIONS, OR RESULT IN DUPLICATE, OR UNDESIRABLE OVERLAPPING OF DEVICES. MODIFICATION MAY INCLUDE: MOVING, SUPPLEMENTING, COVERING OR REMOVAL OF DEVICES, AS DIRECTED BY THE ENGINEER.

THE FOLLOWING GENERAL NOTES APPLY AT ALL TIMES FOR THE DURATION OF THE CONSTRUCTION PROJECT EXCEPT WHEN OTHERWISE NOTED IN THE PLAN OR DIRECTED BY THE ENGINEER.

### TIME RESTRICTIONS

#### A) DO NOT CLOSE OR NARROW TRAVEL LANES AS FOLLOWS:

ROAD NAME	DAY AND TIME RESTRICTIONS
1. NB CAPITAL BLVD. (ONE LANE), TO INCLUDE PROPOSED RAMP "C" (WHEN OPEN TO TRAFFIC) AND EXISTING OFF-LOOP TO W. PEACE ST.	6:00 AM TO 7:00 PM MONDAY THROUGH FRIDAY AND 12:00 NOON TO 6:00 PM SATURDAY & SUNDAY
2. NB CAPITAL BLVD. (TWO LANES)	6:00 AM TO 10:00 PM MONDAY THROUGH THURSDAY, 6:00 AM TO 12:00 MIDNIGHT FRIDAY AND 9:00 AM TO 8:00 PM SATURDAY & SUNDAY
3. SB CAPITAL BLVD. (ONE LANE) TO INCLUDE EXISTING OFF-RAMP TO W. PEACE ST.	6:00 AM TO 9:00 PM MONDAY THROUGH THURSDAY, 6:00 AM TO 11:00 PM FRIDAY AND 8:00 AM TO 8:00 PM SATURDAY & SUNDAY
4. SB CAPITAL BLVD. (TWO LANES)	6:00 AM TO 9:00 PM MONDAY THROUGH THURSDAY, 6:00 AM TO 11:00 PM FRIDAY AND 8:00 AM TO 12:00 MIDNIGHT SATURDAY & SUNDAY
5. W. PEACE ST. TO INCLUDE EXISTING/PROPOSED RAMP "D" AND EXISTING ON-LOOP TO CAPITAL BLVD.	7:00 AM TO 9:00 PM MONDAY THROUGH THURSDAY, 7:00 AM TO 12:00 MIDNIGHT FRIDAY AND 8:00 AM SATURDAY THROUGH 9:00 PM SUNDAY
6. WADE AVE./FLYOVER TO INCLUDE ALL EXISTING/PROPOSED RAMPS AND LOOPS.	6:00 AM TO 11:00 PM MONDAY THROUGH THURSDAY, 6:00 AM TO 12:00 MIDNIGHT FRIDAY AND 7:00 AM SATURDAY THROUGH 9:00 PM SUNDAY
7. PROPOSED W. JOHNSON ST. (-Y5-) WHEN OPEN TO TRAFFIC.	6:00 AM TO 9:00 PM MONDAY THROUGH THURSDAY, 6:00 AM TO 11:00 PM FRIDAY AND 8:00 AM TO 8:00 PM SATURDAY & SUNDAY
8. PROPOSED HARRINGTON ST. (-Y6-) WHEN OPEN TO TRAFFIC.	6:00 AM TO 9:00 PM MONDAY THROUGH THURSDAY, 6:00 AM TO 11:00 PM FRIDAY AND 8:00 AM TO 8:00 PM SATURDAY & SUNDAY

#### B) DO NOT CLOSE OR NARROW TRAVEL LANES DURING HOLIDAYS AND SPECIAL EVENTS AS FOLLOWS:

ROAD NAME	DAY AND TIME RESTRICTIONS
1. NB CAPITAL BLVD. TO INCLUDE PROPOSED RAMP "C" (WHEN OPEN TO TRAFFIC) AND EXISTING OFF-LOOP TO W. PEACE ST.	
2. SB CAPITAL BLVD. TO INCLUDE EXISTING OFF-RAMP TO W. PEACE ST.	
3. W. PEACE ST. TO INCLUDE EXISTING/PROPOSED RAMP "D" AND EXISTING ON-LOOP TO SB CAPITAL BLVD.	
4. WADE AVE./FLYOVER TO INCLUDE ALL EXISTING/PROPOSED RAMPS AND LOOPS.	
5. PROPOSED W. JOHNSON ST. (-Y5-) WHEN OPEN TO TRAFFIC.	
6. PROPOSED HARRINGTON ST. (-Y6-) WHEN OPEN TO TRAFFIC.	

### HOLIDAY


- FOR ANY UNEXPECTED OCCURRENCE THAT CREATE UNUSUALLY HIGH TRAFFIC VOLUMES, AS DIRECTED BY THE ENGINEER.
- FOR NEW YEAR'S, BETWEEN THE HOURS OF 6:00 AM DECEMBER 31st TO 11:00 PM JANUARY 2ND. IF NEW YEAR'S DAY IS ON A FRIDAY, SATURDAY, SUNDAY, OR MONDAY THEN UNTIL 11:00 PM THE FOLLOWING TUESDAY.
- FOR EASTER, BETWEEN THE HOURS OF 6:00 AM THURSDAY AND 11:00 PM MONDAY.
- FOR MEMORIAL DAY, BETWEEN THE HOURS OF 6:00 AM FRIDAY TO 11:00 PM TUESDAY.
- FOR INDEPENDENCE DAY, BETWEEN THE HOURS OF 6:00 AM THE DAY BEFORE INDEPENDENCE DAY AND 11:00 PM THE DAY AFTER INDEPENDENCE DAY.  
  
IF INDEPENDENCE DAY IS ON A FRIDAY, SATURDAY, SUNDAY, OR MONDAY THEN BETWEEN THE HOURS OF 6:00 AM THE THURSDAY BEFORE INDEPENDENCE DAY AND 11:00 PM THE TUESDAY AFTER INDEPENDENCE DAY.
- FOR LABOR DAY, BETWEEN THE HOURS OF 6:00 AM FRIDAY AND 11:00 PM TUESDAY.
- FOR THANKSGIVING DAY, BETWEEN THE HOURS OF 6:00 AM TUESDAY TO 11:00 PM MONDAY.
- FOR CHRISTMAS, BETWEEN THE HOURS OF 6:00 AM THE FRIDAY BEFORE THE WEEK OF CHRISTMAS DAY AND 11:00 PM THE FOLLOWING TUESDAY AFTER THE WEEK OF CHRISTMAS.
- FOR THE ROCK N ROLL MARATHON OCCURRING IN RALEIGH BETWEEN FOUR (4) HOURS BEFORE THE START AND FOUR (4) HOURS AFTER THE END OF THE ROCK N ROLL MARATHON.
- FOR THE ARTSPLOSURE, BETWEEN THE HOURS OF 6:00 PM THE THURSDAY OF THE WEEK OF THE ARTSPLOSURE AND 7:00 AM THE FOLLOWING MONDAY AFTER THE WEEK OF THE ARTSPLOSURE.
- FOR THE IRONMAN OCCURRING IN RALEIGH BETWEEN FOUR (4) HOURS BEFORE THE START AND FOUR (4) HOURS AFTER THE END OF THE IRONMAN.
- FOR THE BIKE FEST, BETWEEN THE HOURS OF 6:00 PM THE THURSDAY OF THE WEEK OF THE BIKE FEST AND 7:00 AM THE FOLLOWING MONDAY AFTER THE WEEK OF THE BIKE FEST.
- FOR THE IBMA BLUEGRASS OCCURRING IN RALEIGH BETWEEN FOUR (4) HOURS BEFORE THE START AND FOUR (4) HOURS AFTER THE END OF THE IBMA BLUEGRASS.
- FOR THE CHRISTMAS PARADE OCCURRING IN RALEIGH BETWEEN SIX (6) HOURS BEFORE THE START AND SIX (6) HOURS AFTER THE END OF THE CHRISTMAS PARADE.

#### C) DO NOT CLOSE ROADS AS FOLLOWS:

ROAD NAME	DAY AND TIME RESTRICTIONS
1. NB CAPITAL BLVD.	5:00 AM TO 12:00 MIDNIGHT, MONDAY THROUGH SUNDAY
2. SB CAPITAL BLVD.	5:00 AM TO 12:00 MIDNIGHT, MONDAY THROUGH SUNDAY
3. W. PEACE ST.	5:00 AM TO 12:00 MIDNIGHT, MONDAY THROUGH SUNDAY


2/1/2016 P:\2014\B-5121-B-5317\TrafficControl\Top\Current TMP Files\LANE'S CURRENT\Peace St\B5121B5317\_Tc\_TMP\_Peace.pshB.dgn User:skennedy


**DOCUMENT NOT CONSIDERED FINAL  
UNLESS ALL SIGNATURES COMPLETED**

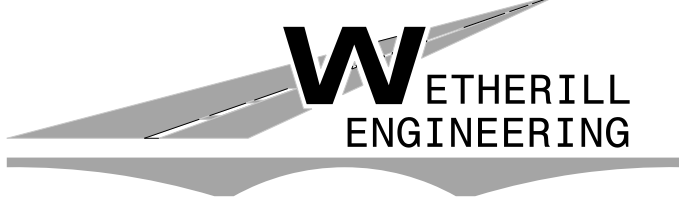

1223 Jones Franklin Rd.  
Raleigh, N.C. 27606  
License No. F-0377  
Bus: 919 851 8077  
Fax: 919 851 8107

TRANSPORTATION PLANNING/DESIGN - BRIDGE/STRUCTURE DESIGN  
CIVIL/SITE DESIGN - GIS/GPS - CONSTRUCTION OBSERVATION

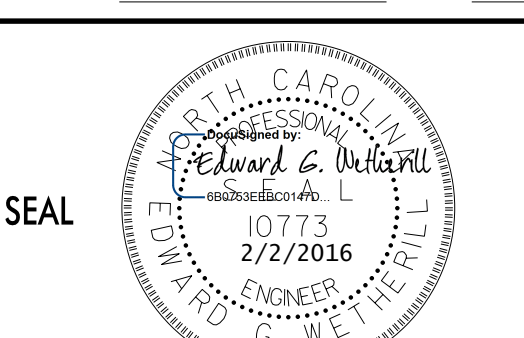APPROVED: _____	DATE: _____
	

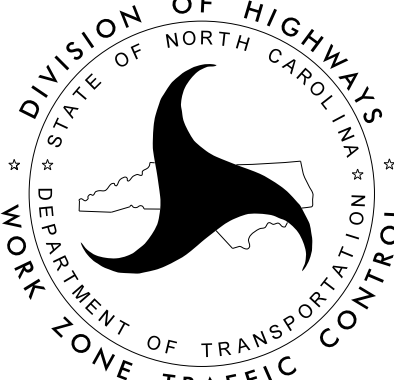

## GENERAL NOTES AND PROJECT NOTES