

**GENERAL NOTES – CONT.**

PROJ. REFERENCE NO.	SHEET NO.
I-5710	TMP-1C

**TIME RESTRICTIONS - CONT.**

B) DO NOT CLOSE OR NARROW TRAVEL LANES DURING HOLIDAYS AND SPECIAL EVENTS AS FOLLOWS:

ROAD NAME

I-540

LEESVILLE ROAD

NC-50 CREEDMOOR ROAD

SIX FORKS ROAD

FALLS OF NEUSE ROAD

-RB1- LEESVILLE ROAD WB ENTRANCE RAMP

-RB2- CREEDMOOR ROAD WB ENTRANCE RAMP

-RB3- SIX FORKS ROAD WB ENTRANCE RAMP

-RB4- FALLS OF NEUSE ROAD WB ENTRANCE RAMP

- FOR ANY UNEXPECTED OCCURRENCE THAT CREATES UNUSUALLY HIGH TRAFFIC VOLUMES, AS DIRECTED BY THE ENGINEER.
- FOR NEW YEAR'S, BETWEEN THE HOURS OF 6:00 A.M. DECEMBER 31st TO 9:00 P.M. JANUARY 2ND. IF NEW YEAR'S DAY IS ON A FRIDAY, SATURDAY, SUNDAY, OR MONDAY THEN UNTIL 9:00 P.M. THE FOLLOWING TUESDAY.
- FOR EASTER, BETWEEN THE HOURS OF 6:00 A.M. THURSDAY AND 9:00 P.M. MONDAY.
- FOR MEMORIAL DAY, BETWEEN THE HOURS OF 6:00 A.M. FRIDAY TO 9:00 P.M. TUESDAY.
- FOR INDEPENDENCE DAY, BETWEEN THE HOURS OF 6:00 A.M. THE DAY BEFORE INDEPENDENCE DAY AND 9:00 P.M. THE DAY AFTER INDEPENDENCE DAY.  
  
IF INDEPENDENCE DAY IS ON A FRIDAY, SATURDAY, SUNDAY OR MONDAY THEN BETWEEN THE HOURS OF 6:00 A.M. THE THURSDAY BEFORE INDEPENDENCE DAY AND 9:00 P.M. THE TUESDAY AFTER INDEPENDENCE DAY.
- FOR LABOR DAY, BETWEEN THE HOURS OF 6:00 A.M. FRIDAY AND 9:00 P.M. TUESDAY.
- FOR THANKSGIVING DAY, BETWEEN THE HOURS OF 6:00 A.M. TUESDAY TO 9:00 P.M. MONDAY.
- FOR CHRISTMAS, BETWEEN THE HOURS OF 6:00 A.M. THE FRIDAY BEFORE THE WEEK OF CHRISTMAS DAY AND 9:00 P.M. THE FOLLOWING TUESDAY AFTER THE WEEK OF CHRISTMAS.
- FOR NORTH CAROLINA STATE FAIR, BETWEEN THE HOURS OF 6:00 A.M. THE FIRST THURSDAY OF THE WEEK OF THE NORTH CAROLINA STATE FAIR AND 9:00 P.M. THE MONDAY AFTER THE NORTH CAROLINA STATE FAIR.

C) DO NOT CLOSE ROADS AS FOLLOWS:

ROAD NAME

-RB1- LEESVILLE ROAD WB ENTRANCE RAMP

-RB2- CREEDMOOR ROAD WB ENTRANCE RAMP

-RB3- SIX FORKS ROAD WB ENTRANCE RAMP

-RB4- FALLS OF NEUSE ROAD WB ENTRANCE RAMP

DAY AND TIME RESTRICTIONS

MONDAY THROUGH SUNDAY  
FROM 6:00 AM TO 9:00 PM

MONDAY THROUGH SUNDAY  
FROM 6:00 AM TO 9:00 PM

MONDAY THROUGH SUNDAY  
FROM 6:00 AM TO 9:00 PM

MONDAY THROUGH SUNDAY  
FROM 6:00 AM TO 9:00 PM

D) DO NOT CONDUCT SINGLE VEHICLE HAULING OF EARTH MATERIALS AS FOLLOWS; INGRESS AND EGRESS FROM RAMPS WILL BE ALLOWED:

ROAD NAME

-RB1- LEESVILLE ROAD WB ENTRANCE RAMP

-RB2- CREEDMOOR ROAD WB ENTRANCE RAMP

-RB3- SIX FORKS ROAD WB ENTRANCE RAMP

-RB4- FALLS OF NEUSE ROAD WB ENTRANCE RAMP

DAY AND TIME RESTRICTIONS

MONDAY THROUGH FRIDAY  
FROM 3:00 PM TO 10:00 AM

SATURDAY AND SUNDAY  
FROM 7:00 PM TO 9:00 AM

MONDAY THROUGH FRIDAY  
FROM 3:00 PM TO 10:00 AM

SATURDAY AND SUNDAY  
FROM 7:00 PM TO 9:00 AM


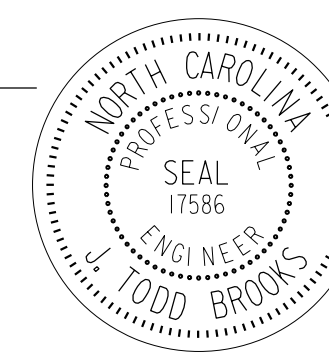
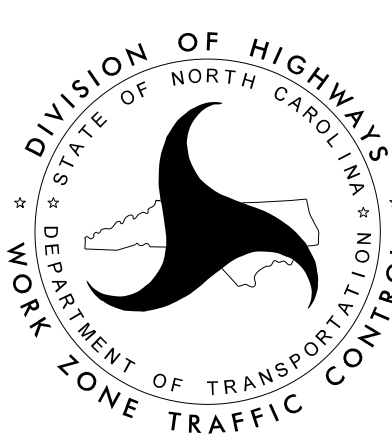
MONDAY THROUGH FRIDAY  
FROM 3:00 PM TO 10:00 AM

SATURDAY AND SUNDAY  
FROM 7:00 PM TO 9:00 AM

MONDAY THROUGH FRIDAY  
FROM 3:00 PM TO 10:00 AM

SATURDAY AND SUNDAY  
FROM 7:00 PM TO 9:00 AM

29-AUG-2016 10:20  
G:\Transportation\Roadway\NCDOT\I-540 Ramp Metering\TrafficControl\TCPN-5710\_TC\_TCP\_OIC.dgn  
WILE2054 AT DUS300019

<p>APPROVED:  DATE: 8/29/2016</p> <p>SEAL</p> 		<p><b>TRANSPORTATION OPERATIONS PLAN</b></p>
<p><b>DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED</b></p>		