DocuSign Envelope ID: 31D555FB-4BCC-4830-BFE1-487C32EC3750

PROJECT REFERENCE NO.	SHEET NO.
B-3186 / B-5898	ITS 2

1. INSTALL 3-WIRE COPPER SERVICE ENTRANCE CONDUCTORS
2. INSTALL 4-WIRE COPPER FEEDER CONDUCTORS
3. INSTALL 3-WIRE COPPER FEEDER CONDUCTORS
4. INSTALL SMFO CABLE
5. EXISTING SMFO CABLE
6. INSTALL FIBER OPTIC DROP CABLE
7. INSTALL TRACER WIRE
8. TRENCH
9. INSTALL PVC CONDUIT
10. INSTALL RIGID, GALVANIZED STEEL CONDUIT
11. INSTALL RIGID, GALVANIZED STEEL RISER WITH WEATHERHEAD
12. INSTALL RIGID, GALVANIZED STEEL RISER WITH FIBER OPTIC CABLE SEAL
13. INSTALL OUTER-DUCT POLYETHYLENE CONDUIT
14. INSTALL POLYETHYLENE CONDUIT
15. DIRECTIONAL DRILL CONDUIT
16. BORE AND JACK CONDUIT
17. INSTALL CABLE(S) IN EXISTING CONDUIT
18. INSTALL CABLE(S) IN NEW CONDUIT
19. INSTALL CABLE(S) IN EXISTING RISER
20. INSTALL CABLE(S) IN NEW RISER
21. INSTALL CABLE(S) IN EXISTING CONDUIT STUB-OUTS
22. INSTALL NEW CONDUIT INTO EXISTING CABINET BASE (USE EXISTING CONDUIT STUB-OUTS WHEN AVAILABLE)
23. INSTALL NEW RISER INTO EXISTING CABINET BASE (USE EXISTING CONDUIT STUB-OUTS WHEN AVAILABLE)
24. INSTALL NEW CONDUIT INTO NEW POLE MOUNTED CABINET
25. INSTALL NEW RISER INTO EXISTING POLE MOUNTED CABINET
26. INSTALL NEW ETHERNET EDGE SWITCH
27. INSTALL NEW FIBER OPTIC TRANSCEIVER
28. INSTALL INTERCONNECT CENTER, PATCH PANEL, JUMPERS AND FUSION SPLICE CABLE IN CABINET
29. INSTALL UNDERGROUND SPLICE ENCLOSURE
30. INSTALL AERIAL SPLICE ENCLOSURE
31. MODIFY EXISTING INTERCONNECT CENTER / SPLICE ENCLOSURE
32. INSTALL POLE MOUNTED SPLICE CABINET
33. INSTALL BASE MOUNTED SPLICE CABINET
34. INSTALL CABINET FOUNDATION
35. INSTALL CCTV CAMERA POLE MOUNTED CABINET
36. INSTALL CCTV CAMERA ASSEMBLY
37. INSTALL CCTV CAMERA WOOD POLE
38. INSTALL CCTV CAMERA METAL POLE AND FOUNDATION
39. INSTALL JUNCTION BOX
40A. INSTALL OVERSIZED JUNCTION BOX
40B. INSTALL SPECIAL OVERSIZED JUNCTION BOX (36" x 24" x 24")
41. REMOVE EXISTING JUNCTION BOX
42. INSTALL WOOD POLE
43. REMOVE EXISTING WOOD POLE
44. INSTALL AERIAL GUY ASSEMBLY
45. INSTALL STANDARD GUY ASSEMBLY
46. INSTALL SIDEWALK GUY ASSEMBLY
47. INSTALL MESSENGER CABLE
48A. REMOVE EXISTING COMMUNICATIONS AND MESSENGER CABLE
48B. REMOVE EXISTING COMMUNICATIONS CABLE
49. BACK PULL EXISTING COMMUNICATIONS CABLE
50. INSTALL CELL MODEM AND ANTENNA
51. INSTALL CABLE STORAGE RACKS (SNOW SHOES) AND STORE 100 FEET OF CABLE
52A. INSTALL DELINEATOR MARKER
52B. INSTALL JUNCTION BOX MARKER
53A. STORE 20 FEET OF COMMUNICATIONS CABLE
53B. STORE 50 FEET OF EACH COMMUNICATIONS CABLE
54. LASH CABLE(S) TO EXISTING COMMUNICATIONS CABLE
55. LASH CABLE(S) TO EXISTING MESSENGER CABLE
56. LASH CABLE(S) TO NEW MESSENGER CABLE
57. MODIFY EXISTING ELECTRICAL SERVICE
58. INSTALL NEW ELECTRICAL SERVICE
59. INSTALL NEW EQUIPMENT CABINET DISCONNECT
60. BOND TRACER WIRE TO EQUIPMENT GROUND BUS
61. DO NOT BOND TRACER WIRE TO EQUIPMENT GROUND BUS
62. BOND RISER AND MESSENGER CABLE TO POLE GROUND
63. BOND RISER TO POLE GROUND
64. BOND MESSENGER CABLE TO POLE GROUND
65. INSTALL HEAT SHRINK TUBING RETROFIT KIT
66. INSTALL MOLDABLE DUCT SEAL
67. SLACK SPAN
68. INSTALL PEDESTAL TYPE SIGN STRUCTURE FOUNDATION AND DMS ASSEMBLY
69. INSTALL EQUIPMENT CABINET DISCONNECT ON CCTV POLE OR DMS STRUCTURE
70. INSTALL CCTV CAMERA ON EXTENSION POLE ATTACHED TO DMS
71. INTERCEPT AND REROUTE EXISTING CONDUITS
72. INSTALL 2-HOUR UPS

NEW		EXISTING
FO	OVERHEAD FIBER OPTIC CABLE	EXI
	CONDUIT (TRENCH, PLOW, OR BRIDGE MOUNT)	
DD	DIRECTIONAL DRILLED CONDUIT	N/A
	OVERSIZED JUNCTION BOX	
	WOOD POLE	
S	AERIAL SPLICE ENCLOSURE	S
S	UNDERGROUND SPLICE ENCLOSURE	S
	METAL POLE	
	CCTV ASSEMBLY	
	STANDARD GUY ASSEMBLY	
	SIDEWALK GUY ASSEMBLY	
	CABLE STORAGE RACKS (SNOW SHOES)	
	SIGNAL/EQUIPMENT CABINET	
S	SPLICE CABINET	S
DMS	DMS SIGN ASSEMBLY	DMS
HAR	HIGHWAY ADVISORY RADIO	HAR
	ELECTRICAL SERVICE	
XX-XXXX	SIGNAL INVENTORY NUMBER	XX-XXXX
XXX-#	CCTV CAMERA /DMS NUMBER	XXX-#

CONSTRUCTION NOTE SYMBOLOGY KEY

- XX — INDICATES NUMBER OF CABLES, LOOPS, ETC.
- XX — INDICATES NUMBER OF FIBERS PER CABLE, TWISTED PAIRS PER CABLE, ETC.
- XX — INDICATES NUMBER OF RISER(S) / CONDUIT(S)
- XX — INDICATES DIAMETER OF RISER(S) / CONDUIT(S) (INCH)

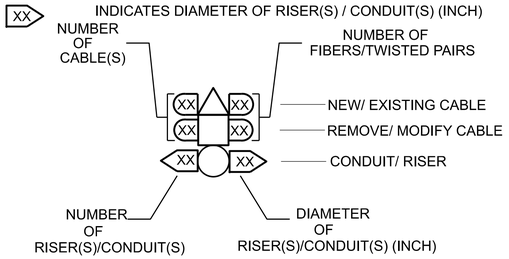

ATTACHMENT POINT:

- XX"/SS / YYY — DISTANCE ABOVE (IN)/ATTACHMENT POINT REFERENCE POINT
- YYY / XX"/SS — REFERENCE POINT DISTANCE BELOW (IN)/ATTACHMENT POINT

"SS" REFERENCE LOCATION
FS = FRONT SIDE OF POLE
BS = BACK SIDE OF POLE

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

AECOM
NC Firm License No.: F-0342
5438 Wade Park Boulevard
Suite 200 Raleigh, NC 27607
Phone: 919-461-1100

Prepared for the Offices of:
Transportation Mobility and Safety Division
STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
750 N. Greenfield Pkwy., Garner, NC 27529

CONSTRUCTION NOTES

Division 14 | Haywood County | Waynesville

PLAN DATE:	August 2023	REVIEWED BY:	R. Garrett
PREPARED BY:	M. Tindal	REVIEWED BY:	

REVISIONS	INIT.	DATE

SEAL
NORTH CAROLINA PROFESSIONAL SEAL 026679 ENGINEER ROCHELLE GARRETT

DocuSigned by:
Rochelle Garrett 8/4/2023
SIGNATURE DATE
CADD Filename:

8/4/2023
pw://aecom-na-pw.bentley.com:AECOM_USA_North_Carolina/Documents/60670967-1-NCDOT B5898 B3186/900-CAD GIS/910_CAD/70_NCDOT_TIP/Intelligent Transportation Systems/B-5898_ITS_PSH2.dgn
TindalM